


PL Elbow

RoHS compliant

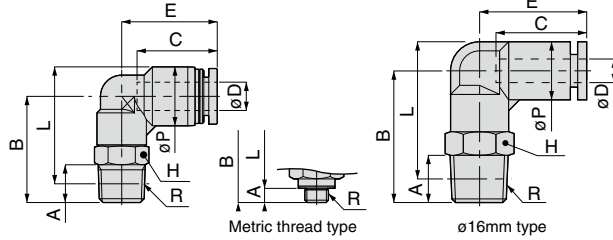

OP P.754

3D CAD

CAD

Unit : mm

| Model code | Model code | R | A | B | L | øP | Tube end C | E | Hex. H | Orifice bore (ømm) | Weight (g) | CAD file name |
|------------|------------|--------|---------|------|-----------|------|------------|------|----------|--------------------|------------|---------------|
| PL4-M5④ | 4 | M5×0.8 | 2.8 [3] | 16 | 18.2 [18] | 10 | 14.9 | 17.7 | 8 | 2.4 | 5.7 | PL4-M5_[C] |
| PL4-M6④ | | M6×1 | 3.8 | 20 | 21.2 | | | 18.7 | 10 | 2.8 | 8 | PL4-M6_[C] |
| PL4-01④ | | R1/8 | 8 | 22 | 23 | | | 2.8 | 10 | PL4-01_ | | |
| PL4-02④ | | R1/4 | 11 | 29 | 28 | | | | 18 | PL4-02_ | | |
| PL6-M5④ | 6 | M5×0.8 | 2.8 [3] | 19.5 | 23 [22.8] | 12.5 | 17 | 20.3 | 10 | 2.4 | 8.9 | PL6-M5_[C] |
| PL6-M6④ | | M6×1 | 3.8 | 20.5 | 23 | | | 3 | 8 | PL6-M6_[C] | | |
| PL6-01④ | | R1/8 | 8 | 22.5 | 24.8 | | | 4.2 | 11 | PL6-01_ | | |
| PL6-02④ | | R1/4 | 11 | 28 | 28.2 | | | | 19 | PL6-02_ | | |
| PL6-03④ | R3/8 | 12 | 31.5 | 31.4 | 4.3 | 30 | PL6-03_ | | | | | |
| PL8-01④* | R1/8 | 8 | 24 | 27.3 | | 14.5 | 18.1 | 22.7 | 12 | 6 | 14 | PL8-01_ |
| PL8-02④* | R1/4 | 11 | 28 | 29.2 | 23.7 | | | 14 | 6.7 | 20 | PL8-02_ | |
| PL8-03④* | R3/8 | 12 | 31 | 31.9 | 24.7 | | | 17 | | 31 | PL8-03_ | |
| PL10-01④ | R1/8 | 8 | 25 | 29.8 | 17.5 | | | 20.2 | 25.5 | 12 | 6 | 18 |
| PL10-02④* | R1/4 | 11 | 28.5 | 31.2 | | 26 | 14 | | 8 | 23 | PL10-02_ | |
| PL10-03④* | R3/8 | 12 | 32 | 34.4 | | 27 | 17 | | 8.3 | 34 | PL10-03_ | |
| PL10-04④ | R1/2 | 15 | 36 | 36.6 | | 27.5 | 21 | | | 57 | PL10-04_ | |
| PL12-02④ | R1/4 | 11 | 29.8 | 34.2 | 21 | 23.4 | 29 | 14 | 8 | 27 | PL12-02_ | |
| PL12-03④ | R3/8 | 12 | 32.5 | 36.7 | | | 29.7 | 17 | 10 | 38 | PL12-03_ | |
| PL12-04④ | R1/2 | 15 | 36.5 | 38.8 | | | 30.7 | 21 | 10.3 | 61 | PL12-04_ | |
| PL16-03④ | R3/8 | 11 | 47 | 53.2 | | | 25 | 24.1 | 33.1 | 22 | 11 | 74 |
| PL16-04④ | R1/2 | 15 | 51 | 55.3 | 13 | 79 | | | PL16-04_ | | | |

※ 1. ④ in Model code / Replaced with "W" for Light-gray color, "-C" for Clean-room package, "-W-C" for Light-gray color and Clean-room package, "-UC" for Clean-wash and Clean-room package

※ 2. "L" is a reference value for height dimension after tightening taper thread.

※ 3. Space saving types are available for model codes with * mark. See page 762.

※ 4. Dimensions in [] are for clean-room and clean-wash package products

※ 5. Orifice bore is the smallest passage converted in terms of the diameter.

FITTING
CONTROLLER
VALVE
TUBE

MAKE-TO-ORDER
PRODUCTS

48

Standard Series

Mini Series

Stainless Series

Chemical Series

PP Series

EG Series

Anti-siphon & P-trap Series

The Compressed Air Series

Minimal Series

Stop Fitting Series

Rotary Series

Twist-Proof Fitting

Block and Connector

Coupling

Color Cap

OP P.000

Page for special specifications

3D CAD

3D CAD data is available at PISCO website.

CAD

CAD data is available at PISCO website.