Hose nipple with male thread and flat seal

Zinc plated steel, low-pressure hose

Series: S-6CAV

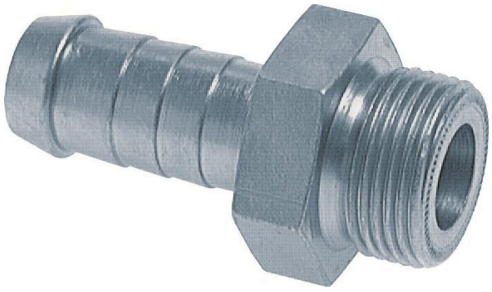

Overview

Materials	Zinc plated steel
DN (mm)	13 to 16
Spanner width (mm)	27 to 32
Hose diameter (inner) (mm)	14 to 15, 17 to 18
Thread	M22×1.5, M26×1.5
SKUs in this series	3

Description

Hose nipples with a male thread and a flat seal for low-pressure hose. It seals on a flat face of the port. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Flat seal on the port face
- Zinc plated steel

Models

Select the SKU for your application.

SKU	DN (mm)	Hose diameter (inner) (mm)	Thread	Spanner width (mm)
F2XV2	13	14 to 15	M22×1.5	27
F2XV4	13	14 to 15	M26×1.5	32
F2XV3	16	17 to 18	M26×1.5	32

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Hose sleeve or clamp not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.