Hose nipple for tube connections, light series

Zinc plated steel, low-pressure hose

Series: S-A86C

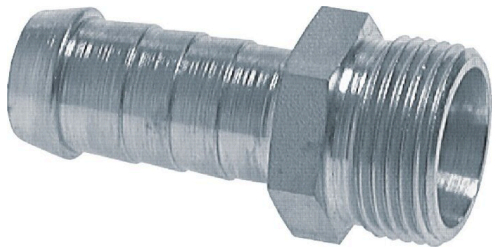

Overview

Material	Zinc plated steel
Series	light model series
DN (mm)	3 to 20
Spanner width (mm)	11 to 32
Hose diameter (inner) (mm)	4 to 5, 5 to 6, 7 to 8, 9 to 10, 11 to 12, 14 to 15, 17 to 18, 21 to 22
For tube outer diameter	5 LL (M10×1), 6 L (M12×1.5), 8 L (M14×1.5), 10 L (M16×1.5), 12 L (M18×1.5), 15 L (M22×1.5), 18 L (M26×1.5), 22 L (M30×2)
SKUs in this series	9

Description

Hose nipples for tube connections, light series, for low-pressure hose. The nipple connects to a tube fitting of the same tube size. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Zinc plated steel

Models

Select the SKU for your application.

SKU	DN (mm)	Hose diameter (inner) (mm)	For tube outer diameter	Spanner width (mm)
F2XUR	3	4 to 5	5 LL (M10×1)	11
F2XUS	4	5 to 6	6 L (M12×1.5)	12
F2XUT	6	7 to 8	8 L (M14×1.5)	14
F2XUU	8	9 to 10	10 L (M16×1.5)	17
F2XUV	10	11 to 12	12 L (M18×1.5)	19
F2XUW	13	14 to 15	15 L (M22×1.5)	22
F2XUY	13	14 to 15	18 L (M26×1.5)	27
F2XUX	16	17 to 18	18 L (M26×1.5)	27
F2XUZ	20	21 to 22	22 L (M30×2)	32

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Hose sleeve or clamp not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.