Crimp fittings and ferrules for high-pressure cleaner hose

Zinc plated steel, for 1SN...W and 2SN...W water hose

Series: S-CD6S



Overview

DN (mm)	6 to 12
Material	Zinc plated steel, Stainless steel
SKUs in this series	23

Description

Crimp fittings for the water hose of high-pressure cleaners, and the ferrules for 1SN...W and 2SN...W water hose. The fittings connect water hoses to the washing gun and to the cleaner. Choose the fitting by the connection and the DN of the hose. Crimp it with a ferrule for the same DN that agrees with the hose type, with a hose crimping machine. The ferrule is a separate item. The maximum working pressure of the hose assembly is that of its lowest-rated part: hose, fitting or connection. Zinc plated steel.

Key features

- Fittings for washing guns and cleaners
- Ferrules for 1SN...W and 2SN...W water hose
- Zinc plated steel


Models

Select the SKU for your application.


SKU	Material	Design	Connection size	DN (mm)
F2XFJ	Stainless steel	1 SN...W & 2 SN ...W sleeve (hose skived)	19 × 30 (Da x L)	6
F2WV5	Stainless steel	DKW	M 22×1.5	6
F2XFN	Stainless steel	1 SN...W & 2 SN ...W sleeve (hose skived)	20.5 × 31 (Da x L)	8
F2WV7	Stainless steel	DKW	M 22×1.5	8
F2XFS	Stainless steel	1 SN...W & 2 SN ...W sleeve (hose skived)	23.7 × 32 (Da x L)	10
F2WV4	Stainless steel	DKW	M 22×1.5	10
F2XFV	Stainless steel	1 SN...W & 2 SN ...W sleeve (hose skived)	27 X 34 (Da X L)	12
F2WVA	Stainless steel	DKW	M 22×1.5*	12
F2XFK	Zinc plated steel	1 SN...W & 2 SN ...W sleeve (hose skived)	19 × 30 (Da x L)	6
F2WV6	Zinc plated steel	DKW	M 22×1.5	6
F2WUX	Zinc plated steel	STW	Spigot: Ø 10 mm, Bearing: Ø 22 mm	6

SKU	Material	Design	Connection size	DN (mm)
F2WUZ	Zinc plated steel	STW	Spigot: Ø 10 mm, Retaining plate: Ø 15.5 mm	6
F2WUY	Zinc plated steel	STW	Spigot: Ø 11 mm, Bearing: Ø 22 mm	6
F2XFP	Zinc plated steel	1 SN...W & 2 SN ...W sleeve (hose skived)	20 × 31 (Da x L)	8
F2XFQ	Zinc plated steel	1 SN...W & 2 SN ...W sleeve (hose skived)	20.5 × 31 (Da x L)	8
F2WVJ	Zinc plated steel	DKW	M 21 × 1.5 WAP	8
F2WV8	Zinc plated steel	DKW	M 22×1.5	8
F2WV3	Zinc plated steel	STW	Spigot: Ø 10 mm, Retaining plate: Ø 15.5 mm	8
F2WV2	Zinc plated steel	STW	Spigot: Ø 11 mm, Bearing: Ø 22 mm	8
F2XFT	Zinc plated steel	1 SN...W & 2 SN ...W sleeve (hose skived)	23.7 × 32 (Da x L)	10
F2WVK	Zinc plated steel	DKW	M 21 × 1.5 WAP	10
F2WV9	Zinc plated steel	DKW	M 22×1.5	10
F2XFW	Zinc plated steel	1 SN...W & 2 SN ...W sleeve (hose skived)	28.5 × 34 (Da x L)	12


Designs

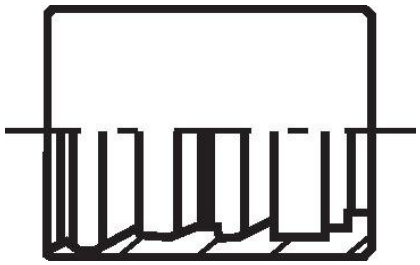

- 1 SN...W & 2 SN ...W sleeve: Ferrule for water hose 1 SN...W, 2 SN...W (hose skived)

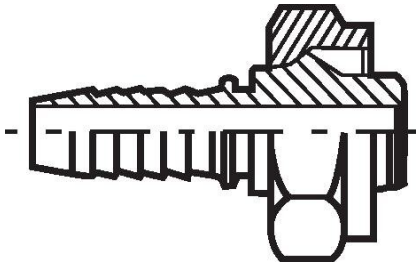

- DKW: Union nut (Kärcher) with rubber cap

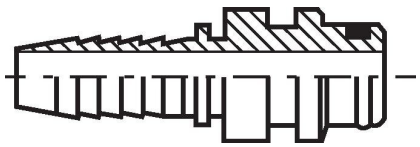

- STW: Push-in nipple for washing device gun with a bearing that acts as a retaining plate

Points to note

- Permanent crimp, needs a hose crimping machine

Tameson B.V.

Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information

support@tameson.com
tameson.com

Document Information

Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.