
Hose nipple with flat sealing face

Zinc plated steel, for union nuts, low-pressure hose

Series: S-JG4D

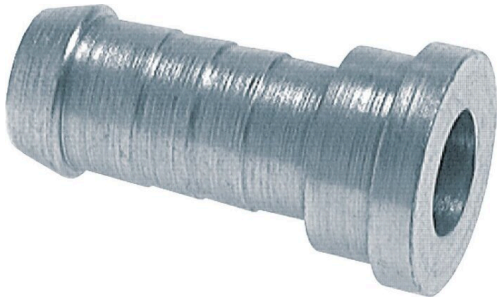

Overview

Materials	Zinc plated steel
DN (mm)	13 to 16
Collar diameter behind sealing face (mm)	17 to 20
Hose diameter (inner) (mm)	14 to 15, 17 to 18
For metric thread	M22×1.5, M26×1.5
Suitable union nut (metric)	831 1300, 831 1600
SKUs in this series	3

Description

Hose nipples with a flat sealing face for low-pressure hose. A union nut (sold separately) holds the collar behind the sealing face on the male thread. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Flat sealing face
- Zinc plated steel

Models

Select the SKU for your application.

SKU	DN (mm)	Hose diameter (inner) (mm)	For metric thread	Collar diameter behind sealing face (mm)	Suitable union nut (metric)
F2XSQ	13	14 to 15	M22×1.5	17	831 1300
F2XSS	13	14 to 15	M26×1.5	20	831 1600
F2XSR	16	17 to 18	M26×1.5	20	831 1600

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Union nut not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.