Hose nipple with male thread and sealing edge

Zinc plated steel, low-pressure hose

Series: S-SSX8

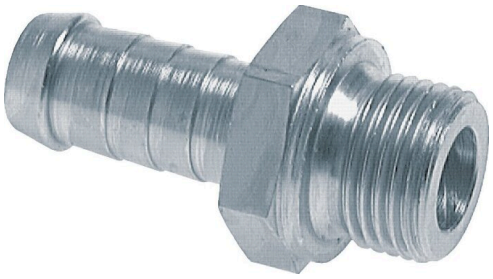

Overview

Materials	Zinc plated steel
DN (mm)	4 to 20
Spanner width (mm)	14 to 32
Hose diameter (inner) (mm)	11 to 12, 5 to 6, 7 to 8, 9 to 10, 14 to 15, 21 to 22, 17 to 18
Thread	M18×1.5, G 1/8, G 1/4, G 3/8, G 1/2, G 3/4
SKUs in this series	12

Description

Hose nipples with a male thread and a sealing edge for low-pressure hose. The sealing edge seals on the face of the port. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Zinc plated steel

Models

Select the SKU for your application.

SKU	DN (mm)	Hose diameter (inner) (mm)	Thread	Spanner width (mm)
F2XVG	4	5 to 6	G 1/4	19
F2XVE	4	5 to 6	G 1/8	14
F2XVF	6	7 to 8	G 1/4	19
F2XVJ	6	7 to 8	G 3/8	22
F2XVH	8	9 to 10	G 3/8	22
F2XVN	10	11 to 12	G 1/2	27
F2XVK	10	11 to 12	G 3/8	22
F2XVD	10	11 to 12	M18×1.5	24
F2XVM	13	14 to 15	G 1/2	27
F2XVQ	13	14 to 15	G 3/4	32
F2XVR	16	17 to 18	G 3/4	32
F2XVP	20	21 to 22	G 3/4	32

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Hose sleeve or clamp not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.