Hose nipple with male thread

Zinc plated steel, low-pressure hose

Series: S-TJEM

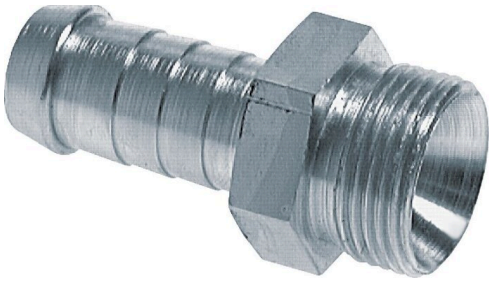

Overview

Materials	Zinc plated steel
DN (mm)	3 to 20
Spanner width (mm)	11 to 36
Hose diameter (inner) (mm)	4 to 5, 5 to 6, 7 to 8, 9 to 10, 11 to 12, 14 to 15, 17 to 18, 21 to 22
Thread	15 options, see the model table
SKUs in this series	16

Description

Hose nipples with a male thread for low-pressure hose. Metric and G threads. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Zinc plated steel

Models

Select the SKU for your application.

SKU	DN (mm)	Hose diameter (inner) (mm)	Thread	Spanner width (mm)
F2XUG	3	4 to 5	M10×1	11
F2XV5	4	5 to 6	G 1/8	13
F2XUH	4	5 to 6	M12×1.5	12
F2XV6	6	7 to 8	G 1/4	17
F2XUJ	6	7 to 8	M14×1.5	14
F2XV7	8	9 to 10	G 3/8	19
F2XUK	8	9 to 10	M16×1.5	17
F2XUM	10	11 to 12	M18×1.5	19
F2XV8	13	14 to 15	G 1/2	24
F2XUN	13	14 to 15	M22×1.5	22
F2XVB	16	17 to 18	G 3/4	30
F2XV9	16	17 to 18	G 5/8	27
F2XUP	16	17 to 18	M26×1.5	27
F2XVC	20	21 to 22	G 1	36
F2XVA	20	21 to 22	G 3/4	30
F2XUQ	20	21 to 22	M30×1.5	30

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Hose sleeve or clamp not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.