



### Main

Range of product	Phaseo
Product or component type	Power supply
Power supply type	Regulated switch mode
Input voltage	100...120 V AC single phase, terminal(s): N-L1 200...500 V AC phase to phase, terminal(s): L1-L2
Output voltage	24 V DC
Rated power in W	240 W
Provided equipment	Power factor correction filter conforming to IEC 61000-3-2
Power supply output current	10 A
Output protection type	Against overload, protection technology: manual or automatic reset Against overvoltage, protection technology: 30...32 V, manual reset Against short-circuits, protection technology: manual or automatic reset Against undervoltage, protection technology: tripping if $U < 21.6$ V Thermal, protection technology: automatic reset
Ambient air temperature for operation	50...60 °C (with derating factor) -25...50 °C (without)

### Complementary

Input voltage limits	170...550 V 85...132 V
Network frequency	47...63 Hz
Inrush current	30 A 2 ms
Cos phi	0.68 at 240 V 0.69 at 120 V
Efficiency	87 %
Output voltage limits	24...28.8 V adjustable
Power dissipation in W	31 W
Line and load regulation	1...3 %
Holding time	$\geq 120$ ms at 400 V $\geq 20$ ms at 100 V $\geq 40$ ms at 240 V
Permissible temporary current boost	1.5 x $I_n$ (for 4 s)
Connections - terminals	For diagnostic relay: removable screw terminal block, connection capacity: 2 x 2.5 mm <sup>2</sup> For input connection: screw type terminals, connection capacity: 3 x 0.5...3 x 4 mm <sup>2</sup> AWG 22...AWG 12 For input ground connection: screw type terminals, connection capacity: 1 x 0.5...1 x 4 mm <sup>2</sup> AWG 22...AWG 12 For output connection: screw type terminals, connection capacity: 4 x 0.5...4 x 4 mm <sup>2</sup> AWG 22...AWG 12 For output ground connection: screw type terminals, connection capacity: 1 x 0.5...1 x 4 mm <sup>2</sup> AWG 22...AWG 12
Marking	CE
Mounting support	35 x 7.5 mm symmetrical DIN rail 35 x 15 mm symmetrical DIN rail
Operating position	Vertical

Operating altitude	2000 m
Output coupling	Parallel Series
Name of test	Electrostatic discharges conforming to EN/IEC 61000-4-2 Induced electromagnetic field conforming to EN/IEC 61000-4-6 Magnetic field conforming to EN 61000-4-8 Primary outage conforming to IEC 61000-4-11 Radiated electromagnetic field conforming to EN/IEC 61000-4-3 Rapid transient conforming to IEC 61000-4-4 Surge conforming to EN/IEC 61000-4-5 Conducted emissions on the power line conforming to EN 55022 class B Radiated emissions conforming to EN 55022 class B Harmonic current emission conforming to EN/IEC 61000-3-2
Status LED	1 LED (green and red)output voltage: 1 LED (green, red and orange)output current:
Depth	145 mm
Height	125 mm
Width	86 mm
Net weight	1 kg

## Environment

MTBF reliability	613500 H at 100 V AC with UTE C80-810 calculation method 892000 H at 200...500 V AC with UTE C80-810 calculation method
Product certifications	CCSAus EAC KC RCM UL
Standards	UL 508 CSA C22.2 No 60950-1
Environmental characteristic	EMC conforming to EN 61000-6-1 EMC conforming to EN 61000-6-3 EMC conforming to EN 55024 EMC conforming to EN/IEC 61000-6-4 EMC conforming to EN/IEC 61204-3 Safety conforming to EN/IEC 60950-1 Safety conforming to EN/IEC 61204-3 Safety conforming to SELV
IP degree of protection	IP20 conforming to EN/IEC 60529
Ambient air temperature for storage	-40...70 °C
Relative humidity	0...90 % during operation 0...95 % in storage
Overvoltage category	Class I conforming to VDE 0106-1
Dielectric strength	3500 V between input and ground 4000 V between input and output 500 V between output and ground

## Offer Sustainability


Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	<a href="#">End Of Life Information</a>

## Contractual warranty

Warranty	18 mois
----------	---------

Regulated Switch Mode Power Supplies


Dimensions

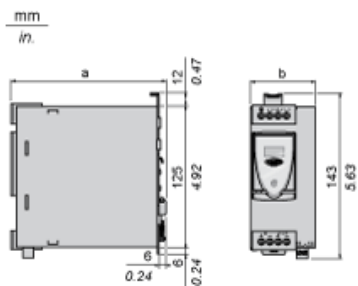

ABL 8	a in mm	a in in.	b in mm	b in in.
RPS24030	125	4.92	45	1.77
RPS24050	125	4.92	56	2.20
RPS24100	145	5.71	86	3.39
RPM24200	145	5.71	146	5.75
WPS24200	160	6.30	96	3.78
WPS24400	160	6.30	166	6.54

## Regulated Switch Mode Power Supply


### Internal Wiring Diagram

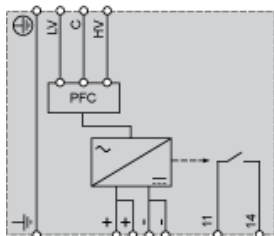


## Regulated Switch Mode Power Supply

### Line Supply Wiring Diagram


Single-phase (L-N) 100 to 120 V



Phase-to-phase (L1-L2) 200 to 500 V




Single-phase (L-N) 200 to 500 V



## Regulated Switch Mode Power Supplies


### Series or Parallel Connection

Series Connection



(1) Two Schottky diodes  $I_{min}$  = power supply  $I_n$  and  $V_{min}$  = 50 V

Parallel Connection



Family	Series	Parallel
ABL 8RPS/8RPM/8WPS	2 products max. (1)	2 products max.

NOTE: Series or parallel connection is only recommended for products with identical references.

For better availability, the power supplies can also be connected in parallel using the ABL8RED24400 Redundancy module.


Regulated Switch Mode Power Supplies

Derating

The ambient temperature is a determining factor that limits the power an electronic power supply can deliver continuously. If the temperature around the electronic components is too high, their life will be significantly reduced.

The nominal ambient temperature for the Universal range of Phaseo power supplies is 50°C. Above this temperature, derating is necessary up to a maximum temperature of 60°C.

The graph below shows the power (in relation to the nominal power) that the power supply can deliver continuously, depending on the ambient temperature.

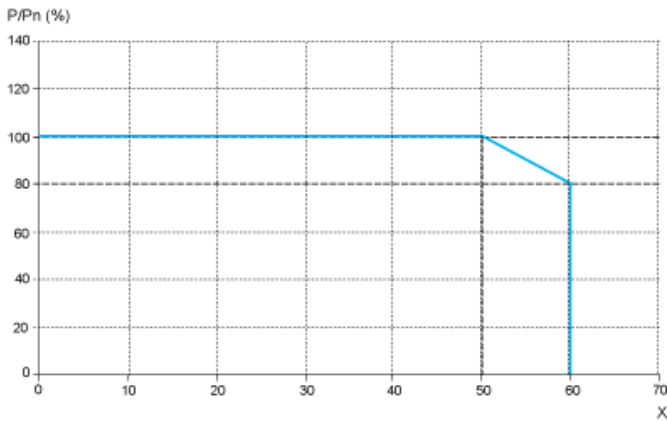

X Maximum operating temperature (°C)

ABL 8RPM, ABL 8RPS, ABL 8WPS mounted vertically


Derating should be considered in extreme operating conditions:

- Intensive operation (output current permanently close to the nominal current, combined with a high ambient temperature)
- Output voltage set above 24 Vdc (to compensate for line voltage drops, for example)
- Parallel connection to increase the total power

Regulated Switch Mode Power Supply


Load Limit

Manual Reset Protection Mode

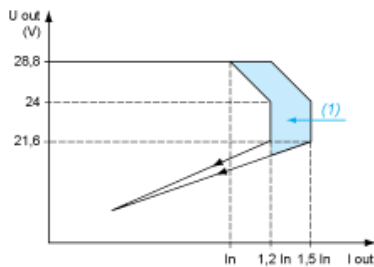


(1) Boost 4s

Automatic Reset Protection Mode

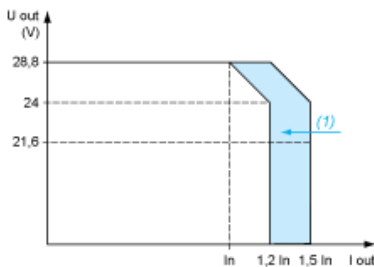

(1) Boost 4s

### "Boost" Repeat Accuracy

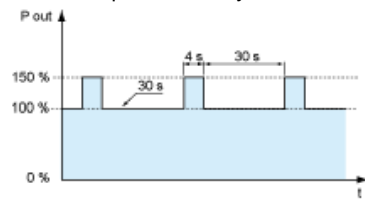

This type of operation is described in detail in the user manual, which can be downloaded from the website.