



M5 to M12 circular connectors

Product overview 2021

M5 to M12 circular connectors

Circular connectors in metric sizes M5 to M12 have become standard in numerous industries and areas of application. The broad product range from Phoenix Contact enables uniform connection solutions for signal, data, and power transmission in the device.

DATA

Data up to 10 Gbps

- Codings for all common fieldbus systems
- Hybrid connectors for simultaneous data and power transmission (Power over Ethernet)
- Components in accordance with CAT6_A

i Web code: #0682



Find out more with the web code

For detailed information, use the web codes provided in this brochure. Simply enter the # and the four-digit number in the search field on our website.

i Web code: #1234 (example)

Or use the direct link:
phoenixcontact.net/webcode/#1234



SIGNAL

Signals up to 17-pos.

- Currents up to 4 A
- Voltages up to 250 V
- Available with optional shield connection

i Web code: #0680

POWER

Power up to 16 A/690 V

- Connection cross sections up to 2.5 mm²
- For 1-phase and 3-phase mains voltage applications
- Protected against mismatching for AC and DC applications

i Web code: #0681

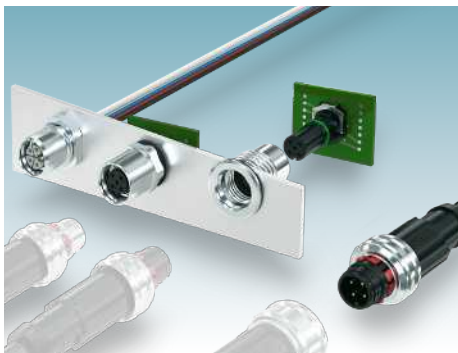


Contents

Overview: M5 to M12 circular connectors	2
Unrivalled variety for signals, data, and power	4
Page navigation	12
Device connectors	
Signals	14
Data	31
Power	40
Connectors designed for assembly	
Signals	44
Data	47
Power	48
Assembled cables	
Signals	50
Data	51
Power	54
Accessories	55
Pin assignments and litz wire colors	56
Excellent services	60

Unrivalled variety for signals, data, and power

Industrial electronics is developing at a rapid pace and constantly placing new demands on connection technology. Phoenix Contact offers innovative circular connectors for virtually all areas of application. A modular structure and numerous pin assignments enable the device connectors to be easily integrated into your device design.




Push-pull fast-locking system

Simple design-in: With the duo-contour, M12 push-pull housings are compatible with standard M12 screw-in connectors




For virtually every application

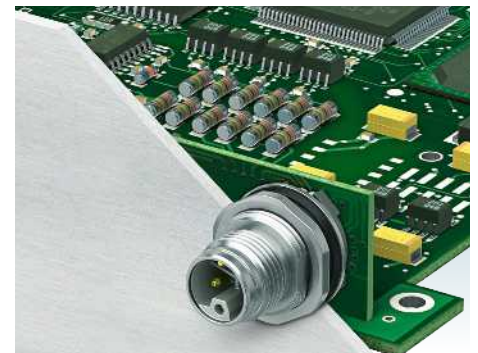Various installation options for practical integration into your device



For reliable transmission

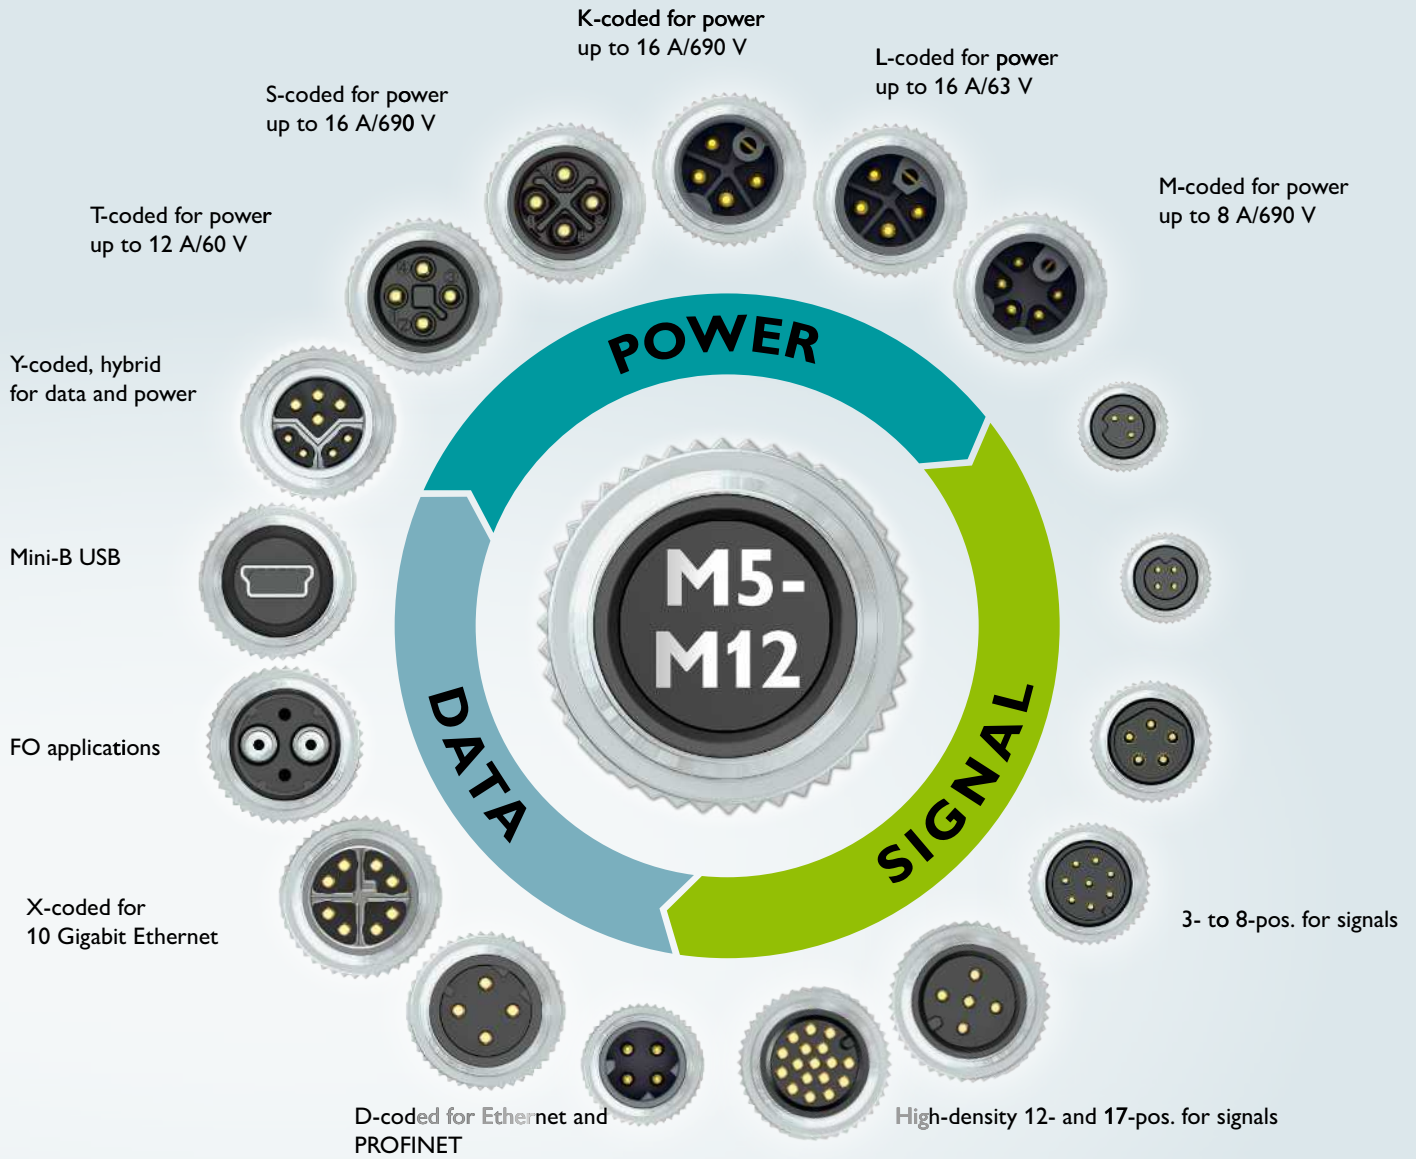M8 and M12 connectors for soldering processes with optional shield connection to the housing



For high contact density

M5, M8, and M12 signal connectors for up to 17 positions



For fast data transmission

M8 and M12 data connectors for up to 10 Gbps




For high power

M12 power connectors for up to 16 A and 690 V

Device connectors with litz wire and cable connection

Device connectors with litz wires or round cables in sizes M5, M8, and M12 are a reliable alternative to permanent cable connections. The diverse housing designs from Phoenix Contact offer the right solution for every device design, and are also available with seamless shield connection as an option.



Your advantages at a glance



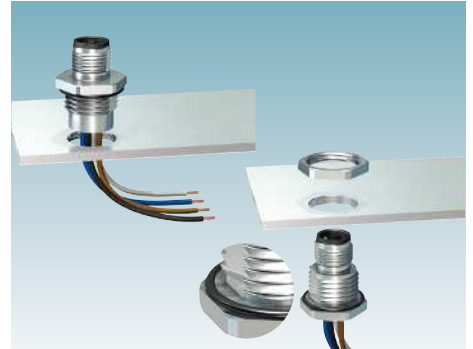
Pre-assembled cables

- No field assembly necessary
- Various cable lengths and assemblies



Easy positioning

- Defined cable outlet direction



Safe mounting

- XL housing versions simplify the device cutout
- Increased safety and tightness of seal with tightening limitation



Reliable seals

- Protection of device electronics when not plugged in



Reliable transmission

- 360° shield connection
- Fieldbus-specific cables



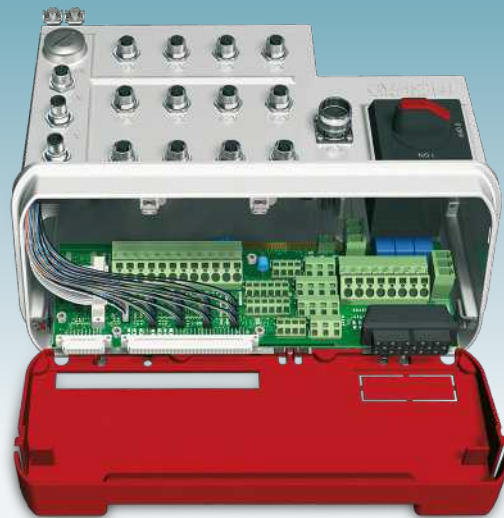
Fieldbus-specific coding

- Protection against mismatching with color and mechanical fieldbus-specific codings

Main features



Device connection technology from Phoenix Contact for distributed modules is designed for harsh ambient conditions in industrial production processes.

- Pre-assembled with litz wires or cables
- Optional shield connection
- Numerous mounting types: front, rear or modular mounting
- Metric or Pg fastening thread




Device connectors for direct PCB mounting

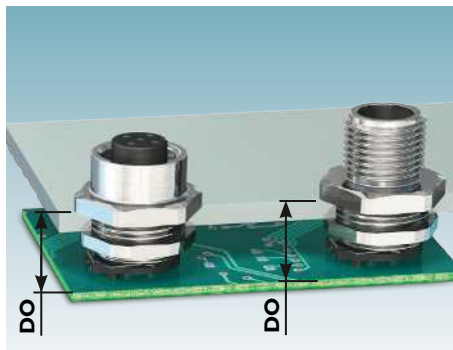Phoenix Contact offers a comprehensive range of one- and two-piece device connectors for direct PCB mounting. The connectors are suitable for wave, THR, and SMT soldering processes and provide uniform mechanical installation conditions for front and rear mounting.



Front mounting, two-piece

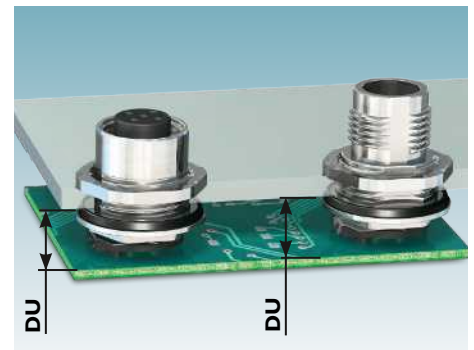Distance DO: uniform installation conditions from PCB upper edge to housing front plate outer edge



Rear mounting, two-piece

Distance DU: uniform installation conditions from PCB upper edge to housing front plate inner edge

Various device port solutions

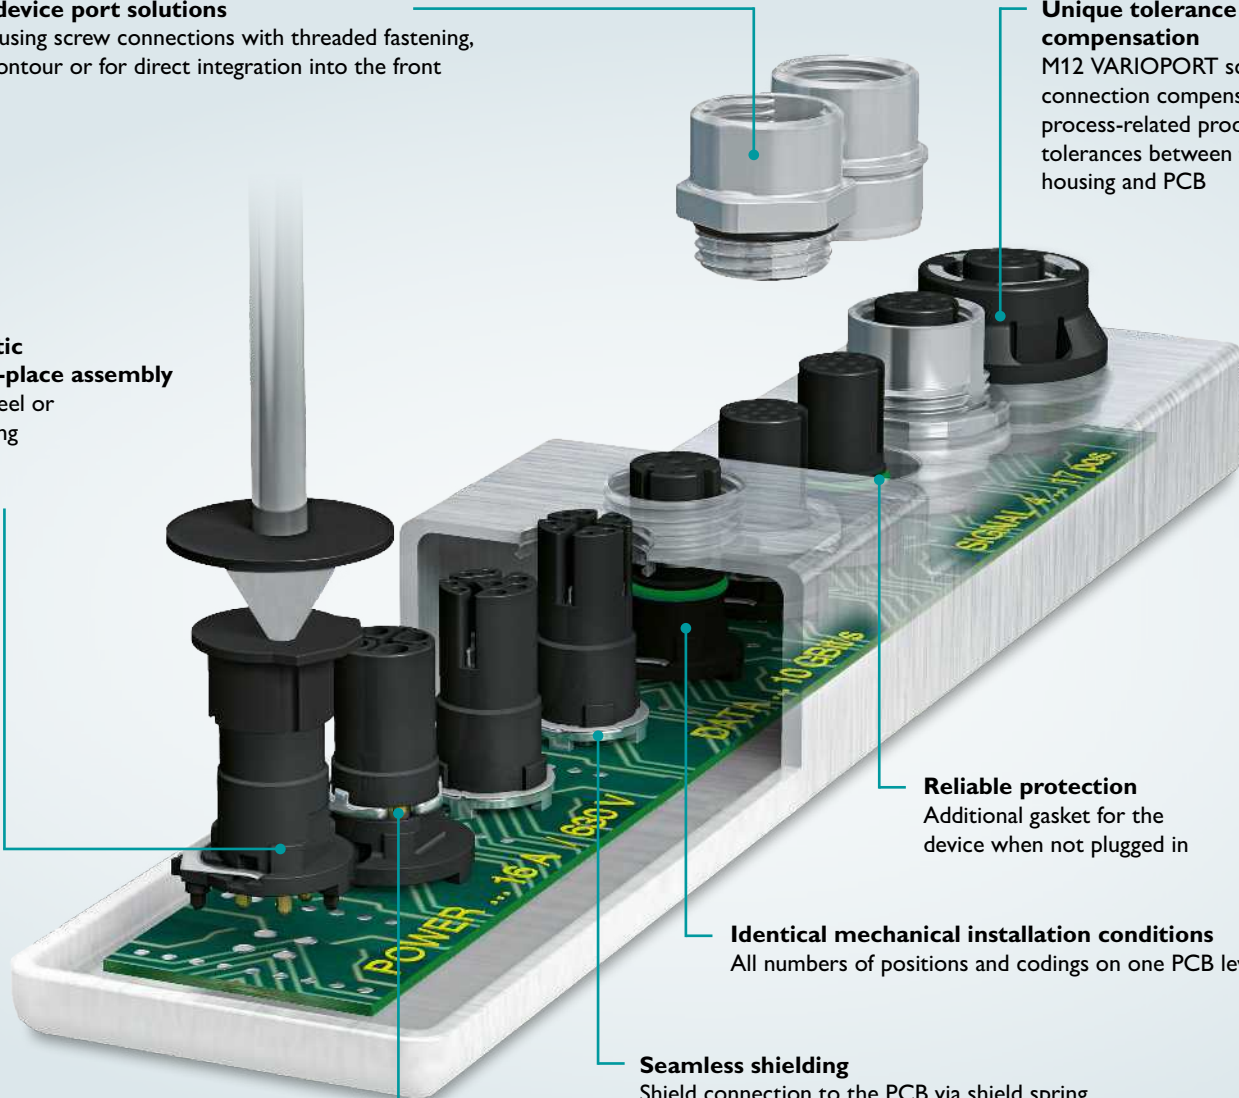
Use of housing screw connections with threaded fastening, press-in contour or for direct integration into the front plate

Unique tolerance compensation

M12 VARIOPORT screw connection compensates for process-related production tolerances between the housing and PCB

Automatic pick-and-place assembly

Tape-on-reel or tray packing



Reliable protection

Additional gasket for the device when not plugged in

Identical mechanical installation conditions

All numbers of positions and codings on one PCB level

Seamless shielding

Shield connection to the PCB via shield spring

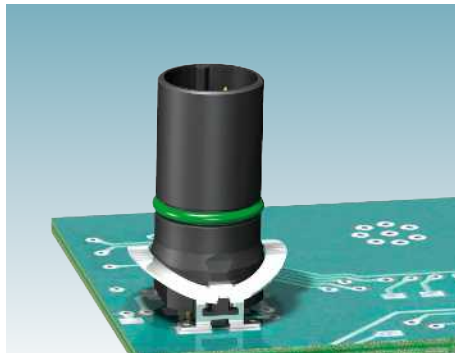
Secure power transmission

PE connection to the device housing



For through-hole reflow soldering, two-piece

4- to 17-pos. contact carriers and housing screw connections in M12



For surface-mount technology, two-piece

3- to 17-pos. contact carriers and housing screw connections in M8 and M12



For wave soldering, one- and two-piece

3- to 17-pos. versions in M5, M8, and M12

Connectors and cables for field cabling

Connect your devices quickly and safely in the field. You can wire different cable types and lengths on site with connectors designed for assembly. You have access to a comprehensive range of assembled cables for quick and convenient field cabling. Halogen-free PUR cables, which we use as standard, already meet the relevant requirements in many fields of application.



 Web code:
#0561

Main features

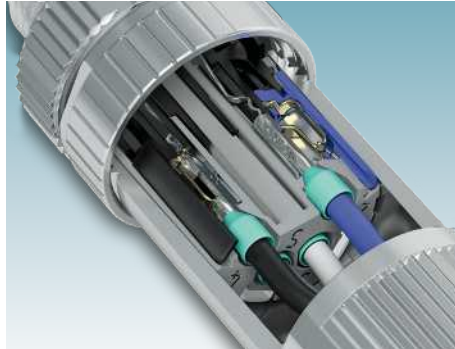
- Short connect time with push-pull fast-locking system
- Reliable 360° shielding even under extreme environmental influences
- Save space with high-position connectors
- Convenient: increased machine availability with quick and easy diagnostics
- Customer-specific assemblies and cable lengths

Your advantages at a glance




Innovative shielding concept

Maximum resistance to shock and vibration with the seamless, large-area shield connection with Advanced Shielding Technology.



Push-in connection

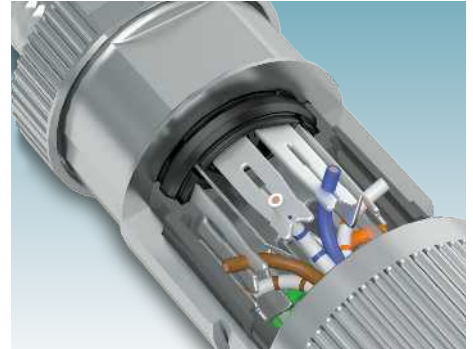Tool-free wiring of all conductor types with direct insertion. Color-coded lever for reliable assembly.




IDC insulation displacement connection

QUICKON provides the fastest connection for M12 connectors. The insulation displacement contact provides a vibration-resistant and gas-tight contact.



Crimp connection

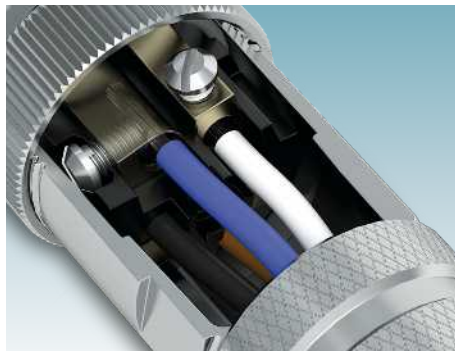Connection can be automated for high production volumes. The extremely compact connector is suitable for railway applications.



Screw connection

The classic solution for connection technology. You can assemble a variety of cables and cable qualities universally on site.



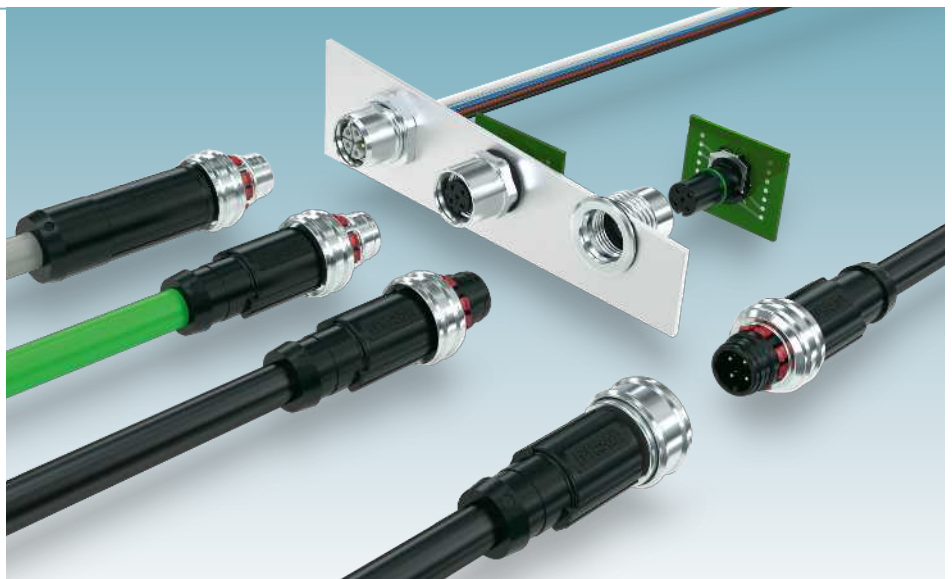
Pierce connection

Compact and high-position connection. The contact is made via a contact pin, which pierces the single-core wires axially.

M12 push-pull connectors The new standard for automation technology

Simple connection, quick latching: M12 connectors with push-pull inner interlocking enable secure connection without tools, even in narrow spaces. Implement compact housing designs with recessed M12 ports and higher packing density. With the push-pull inner and outer interlocking, you can easily implement flying leads.

 Web code: #1831



Page navigation

M5 to M12 circular connectors							
Design	Number of positions	3	4		5		6
	Coding	 A	  A	  D	  A	 B	 A
M12 device connectors for litz wire connection							
	Front mounting with litz wires	–	14 / 37	14	14	14	–
	Rear mounting with litz wires	–	16	16	16	16	–
	Front mounting, modular, crimp connection	–	16	16	16	16	–
	Front mounting with solder cups	–	–	–	18	–	–
	Rear mounting with solder cups	–	–	–	20	–	–
M12 device connectors with assembled cable							
	Front mounting	–	–	31	36	34	–
	Rear mounting	–	18 / 37	31 / 33	18 / 36	34	–
M12 device connectors for PCB connection							
	One-piece, front mounting	–	18	18	18	18	–
	One-piece, rear mounting	–	20 / 37	20 / 31 / 33	20 / 36	34	–
	Two-piece, for wave/THR soldering processes	–	22	22	22	22	–
	Two-piece, for SMD soldering processes	–	24	24	24	24	–
M12 connectors, designed for assembly/with molded cable							
	Plastic-molded cables	50	52	52	50	50	–
	Designed for assembly	–	44	47	44 / 47	47	–
M8 device connectors with litz wires							
	Front mounting	26	26	–	–	39	26
	Rear mounting	26	26	–	–	–	26
M8 device connectors for PCB connection							
	One-piece, rear mounting	26	26	39	–	39	26
	Two-piece, for SMD soldering processes	28	28	28 / 39	–	28 / 39	28
M8 connectors, designed for assembly/with molded cable							
	Plastic-molded cables	50	50	51	–	–	–
	Designed for assembly	46	46	–	–	–	–
M5 device connectors with litz wires							
	Front mounting	30	30	–	–	–	–
M5 device connectors for PCB connection							
	One-piece, rear mounting	30	30	–	–	–	–

SIGNAL














DATA

POWER








8			12	17	2+PE	3+PE	4	4+PE	4/4+FE	5+PE
A	X	Y	A	A	S	S	T	K	L	M
14	-	-	14	14	40	40	40	40	40	40
16	-	32	16	16	40	40	40	40	40	40
16	-	-	-	-	-	40	40	-	-	-
18	-	-	-	-	-	-	-	-	-	-
20	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
18 / 31 / 33	32	32	18	18	-	-	-	-	-	-
18	-	-	-	-	-	-	-	-	-	-
20	32	32	20	20	-	-	-	-	43	-
22	32	32	22	22	-	42	42	43	43	43
24	32	32	24	24	-	-	42	-	-	-
52	52	52	-	-	-	54	54	54	54	54
44 / 47	47	-	45	45	48 / 49	48 / 49	48 / 49	48 / 49	48 / 49	-
26	-	-	-	-	-	-	-	-	-	-
26	-	-	-	-	-	-	-	-	-	-
26	-	-	-	-	-	-	-	-	-	-
28	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-









M12, with litz wires, front mounting		4-pos.			
 Web code: #0207	Coding	A	D		
	Rated voltage	250 V	250 V		
	Rated current	4 A	4 A		
	Conductor cross-section	0.34 mm ²	0.34 mm ²		
	Assembly				
	Pin assignment	Male 	Female 	Male 	Female 
Versions with zinc die-cast housing, for screw fastening					
	Pg9	1693762	1693788	–	–
	Flat nut, Pg9				
	M16 x 1.5	1523450	1523434	1551558	1535202
	Flat nut M16 x 1.5				
new	M16 x 1.5, XL versions, wrench size 19	1411577	1411568	1411578	1411569
	Flat nut M16 x 1.5				
	Push-pull, M16 x 1.5	1108117	–	1027688	1027686
	Flat nut M16 x 1.5				
	Pg9, can be positioned	1693775	1693791	–	–
	M16 x 1.5, can be positioned	1523463	1523447	1552256	1535215
	20 mm square flange, mounting holes 4 x Ø 3.2 mm	1419784	1419797	1441626	1441639
	25 mm square flange, mounting holes 4 x Ø 2.7 mm	1419991	1420003	1440957	1440960
Versions with plastic and brass housing (nickel-plated), for screw fastening					
	Plastic M16 x 1.5	–	–	–	–
	Flat nut M16 x 1.5				
	Brass (nickel-plated) M20 x 1.5	1408451	1408436	–	–
	Flat nut, M20 x 1.5				
Versions with stainless steel housing (1.4404), for screw fastening					
	Pg9	1554555	1554448	–	–
	Flat nut, Pg9				
	M16 x 1.5	1405233	1458855	–	–
	Flat nut M16 x 1.5				
	Pg9, can be positioned	1554610	1554649	–	–
	M20 x 1.5	1408415	1408416	–	–

Products **in bold** feature the SPEEDCON fast-locking system and are fully compatible with the M12 standard locking system.

5-pos.		8-pos.		12-pos.		17-pos.			
 A	 B	 A	 A	 A					
60 V	60 V	30 V	30 V	30 V					
4 A	4 A	2 A	1.5 A	1.5 A					
0.34 mm ²	0.34 mm ²	0.25 mm ²	0.14 mm ²	0.14 mm ²					
Pre-assembled with 0.5 m long litz wires									
Male	Female	Male	Female	Male	Female	Male	Female		
									
1671111	1671098	–	–	1513774	1513758	–	–	–	–
1504084									
1520055	1520039	1520013	1520000	1523492	1523476	1556265	1556252	1556304	1556294
1504097									
1411579	1411579	1411580	1411572	1411581	1411573	1411582	1411574	1411583	1411576
1504097									
1027694	1027683	–	–	–	–	–	–	–	–
1504097									
1671124	1671108	1515057	1515044	1513787	1513761	–	–	–	–
1520068	1520042	1520026	1519998	1523502	1523489	–	–	–	–
1441642	1441655	1441668	1441671	1441684	1441697	1441707	1441710	1441723	1441736
1440973	1440986	1440999	1441558	1441561	1441574	1441587	1441590	1441600	1441613
1436411									
1436411	–	–	–	1436424	–	–	–	–	–
1640692									
1408446	1408454	–	–	1408442	1408453	–	–	–	–
1411242									
1554568									
1554568	1699863	–	1452343	1554571	1554607	–	–	–	–
1404984									
1458868	1458871	–	–	1405221	1458842	1405238	1405242	1405243	1405244
1404983									
1554623	1554652	–	1424023	1554636	1554665	–	–	–	–
1452097	1452107	1452084	1452097	1452107	1452110	–	–	–	–

SIGNAL

M12, crimp connection, front mounting		4-pos.			
 Web code: #0208	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Conductor cross-section	0.34 mm ²		0.34 mm ²	
	Pin assignment	Male	Female	Male	Female
					
Modular versions					
	25 mm square flange, mounting holes 4 x Ø 3.2 mm				
	Pre-assembled contact carrier, with 0.5 m long litz wires	1440805	–	1440821	–
	Contact carrier for crimp contacts, designed for assembly¹⁾	1440931	–	1440944	–
	Crimp contacts Ø 1.0 mm, 0.08 ... 0.5 mm²	1452356	–	1452356	–
	Crimp contacts Ø 0.8 mm, 0.08 ... 0.34 mm²	–	–	–	–
	Crimping tool				

M12, with litz wires, rear mounting		4-pos.			
 Web code: #0209	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Conductor cross-section	0.34 mm ²		0.34 mm ²	
	Assembly				
	Pin assignment	Male	Female	Male	Female
					
Versions with zinc die-cast housing, for screw fastening					
	Pg9	1556618	1556621	1551532	1551529
	M12 x 1	1551875	–	1551901	–
	M16 x 1.5	1419629	1419632	1419603	1419616
	M16 x 1.5, XL versions, wrench size 19	1411591	1411584	1411592	1411585
	Push-pull, M16 x 1.5	1108128	–	1027691	1027670
Versions with plastic housing, for screw fastening					
	Pg9	–	–	–	–
Versions with stainless steel housing (1.4404), for screw fastening					
	Pg9	1405239	1405240	–	–

¹⁾ The information on rated current is valid for max. connection cross-section. Products in bold feature the SPEEDCON fast-locking system and are fully compatible with the M12 standard locking system.

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
0.34 mm ²		0.34 mm ²		0.25 mm ²		0.14 mm ²		0.14 mm ²	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female

1419959

1440818	-	1440759	-	1457827	-	-	-	-	-
1419988	-	1440915	-	1440928	-	-	-	-	-
1452356	-	1452356	-	-	-	-	-	-	-
-	-	-	-	1452372	-	-	-	-	-

1212510

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
0.34 mm ²		0.34 mm ²		0.25 mm ²		0.14 mm ²		0.14 mm ²	

Pre-assembled with 0.5 m long litz wires








Male	Female	Male	Female	Male	Female	Male	Female	Male	Female









1542703	1542729	1543663	1543676	1542716	1542732	1430459	1430446	1430475	1430462
1551888	-	1551891	-	1551914	-	1437122	-	1437135	-
1419645	1419658	1419661	1419674	1419687	1419690	1419700	1419713	1419726	1419739
1411593	1411586	1411594	1411587	1411595	1411588	1411596	1411589	1411597	1411590
1027697	1027666	-	-	-	-	-	-	-	-

-	1436356	-	-	-	1436369	-	-	-	-
---	---------	---	---	---	---------	---	---	---	---

1554681	1554717	-	-	1554694	1554720	-	-	-	-
---------	---------	---	---	---------	---------	---	---	---	---

SIGNAL

M12, with cable, rear mounting		4-pos.			
 Web code: #0210	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Pin assignment	Male	Female	Male	Female
					
Versions for screw fastening, shielded					
	M16 x 1.5 cable length: 1 m, PUR black	1419399	1419302	–	–
	M16 x 1.5 cable length: 2 m, PUR black	1419386	1419315	–	–
Control cabinet feed-throughs for screw fastening					
	M16 x 1.5 male to female	–	–	–	–
	M16 x 1.5 female to female	–	–	–	1424326











Signal – M12, solder connection, front mounting		4-pos.			
 Web code: #0212	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Pin assignment	Male	Female	Male	Female
					
Versions for PCB mounting, with torsion protection, for wave soldering processes					
	20 mm square flange, direct PCB mounting	1456417	1456420	1456394	1456404
Plastic versions, with solder cups, for screw fastening					
	M12 x 1	–	–	–	–
	M16 x 1.5	–	–	–	–

Products in bold feature the SPEEDCON fast-locking system and are fully compatible with the M12 standard locking system.

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1419409	1419328	-	-	1419425	1419357	1442227	1442188	1442308	1442269
1419412	1419331	-	-	1419438	1419344	1442230	1442191	1442311	1442272
1551671	-	1551684	-	1551697	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-













5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1456433	1456446	1456459	1456462	1408574	1408573	-	-	-	-
1436437	-	-	-	1436440	-	-	-	-	-
1436398	-	-	-	1436408	-	-	-	-	-

SIGNAL

M12, solder connection, rear mounting, for wave soldering processes		4-pos.				
 Web code: #0213	Coding	A		D		
	Rated voltage	250 V		250 V		
	Rated current	4 A		4 A		
	Pin assignment	Male	Female	Male	Female	
						
Versions with zinc die-cast housing, one-piece, straight, for screw fastening						
	Pg9	6 mm solder pins	1553459	1553462	1551516	1551503
		12 mm solder pins	–	1410777	1552308	1552272
	M12 x 1	6 mm solder pins	1551820	–	1551859	–
	M16 x 1.5	6 mm solder pins	1419742	1419755	1441749	1441752
	Push-pull, M16 x 1.5	6 mm solder pins	1108002	–	1027680	1027696
	Pg9, with shield contact	6 mm solder pins	–	1556841	1553035	1553006
		12 mm solder pins	1558535	1558522	1558519	1558506
	M12 x 1, with shield contact	6 mm solder pins	1552955	–	1552984	–
	M16 x 1.5, with shield contact	6 mm solder pins	1419768	1419771	1441862	1441875
Versions with plastic housing, one-piece, straight for screw fastening						
	Pg9		–	–	–	–
	Pg9 with solder cups	Max. 0.34 mm ²	–	–	–	–
		Max. 0.25 mm ²	–	–	–	–
Versions with stainless steel housing (1.4404), one-piece, straight for screw fastening						
	Pg9		1404979	1404974	–	–
Versions with brass housing (nickel-plated), two-piece including housing, straight*						
	Straight, shielded, for fastening in the feed-through hole		–	–	–	1534627
	Straight, for fastening in the feed-through hole		–	–	–	–

* Cannot be combined with two-piece contact carriers for PCB mounting for THR, SMD or wave soldering processes.

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1542745	1542761	1543647	1543650	1542758	1542774	1559932	1559929	1559961	1559958
1552311	1552285	1552324	1552298	-	1408770	-	-	-	-
1551833	-	1551846	-	1551862	-	1559945	-	1559974	-
1441765	1441778	1441781	1441794	1441804	1441817	1441820	1441833	1441846	1441859
1027676	1027669	-	-	-	-	-	-	-	-
1553048	1553019	1553051	1553022	1553873	1553860	1436783	1436770	1436819	1436806
1558551	1558548	1558577	1558564	-	1408771	-	-	-	-
1552968	-	1552971	-	1552997	-	1437106	-	1437119	-
1441888	1441891	1441901	1441914	1441927	1441930	1441943	1441956	1441969	1441972
-	1436330	-	-	-	1436343	-	-	-	-
-	1436314	-	-	-	-	-	-	-	-
-	-	-	-	-	1436327	-	-	-	-
1554746	1554733	-	-	1529807	1529797	-	-	-	-
1437193	1421685	1437203	1437180	-	-	-	-	-	-
1694211	1694237	1514883	1515934	1424017	1556854	-	-	-	-

M12, solder connection, PCB mounting, for reflow and wave soldering processes		4-pos.			
i Web code: #0214	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Pin assignment	Male	Female	Male	Female
					
Two-piece, THR contact carriers					
	Straight, shielded, THR, tray packaging	1439939	–	1552214	1551451
	Straight, shielded, THR, tape-on-reel	1457500*	1457623*	1457513*	1457636*
	Straight, THR, tray packaging	1437164	1439942	–	1414071
	Straight, THR, tape-on-reel	1457490*	1457610*	–	–
Two-piece, wave soldering contact carriers					
	Angled, shielded, wave soldering, blister packing	1439887	1432444	1436673	1432457
	Angled, wave soldering, blister packing	1436660	1436628	–	–
	Straight, shielded, wave soldering, blister packing	–	–	–	1551480
	Straight, wave soldering, blister packing	–	–	–	–
Two-piece, housing screw connections for THR and wave soldering contact carriers					
new					
	Push-pull outside interlocking, male				
	Front mounting	1027679 ⁵⁾	–	1027679 ⁵⁾	–
	Rear mounting	1027661 ¹⁾	–	1027661 ¹⁾	–
	Push-pull inner locking system, female				
	Raised front mounting, M12 x 1, flat gasket	–	1233779 ¹⁾	–	–
	Raised front mounting, M14 x 1, O-ring	–	1249211 ⁵⁾	–	–
	Recessed front mounting, M14 x 1, flat gasket	–	1233777 ⁶⁾	–	–
	Raised rear mounting, M16 x 1	–	1249212 ¹⁾ 1233780 ²⁾	–	–
	Push-pull outside interlocking, female				
	Front mounting ⁷⁾	–	–	–	1027679 ¹⁾
Rear mounting ⁷⁾	–	–	–	1027661 ¹⁾	
	Screw versions, rear mounting	M15 x 1 screw fastening			
	SPEEDCON versions, rear mounting	M15 x 1 screw fastening			
	Clip-in versions, rear snap-in mounting, tolerance-compensating (not suitable for S-coded THR contact carriers or SPEEDCON)	Threaded sleeve for straight socket contact carriers			
		Fixing sleeve , can be used universally with any threaded sleeve			Color
	SPEEDCON versions with O-ring, front mounting	M12 x 1 screw fastening			
		M12 x 1 screw fastening			
		M14 x 1 screw fastening			
	SPEEDCON screw versions with flat gasket, front mounting	M12 x 1 screw fastening			
		M12 x 1 screw fastening			

^{1), 2)} Distance from PCB upper edge to housing front plate inner edge: DU = ¹⁾ 6 mm ²⁾ 6.8 mm, also see page 8.












^{3), 4), 5), 6)} Distance from PCB upper edge to housing front plate outer edge: DO = ³⁾ 6 mm ⁴⁾ 7.5 mm ⁵⁾ 9 mm ⁶⁾ approx. 19 mm, also see page 8.

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1432350	1432363	1552230	1551435	1557581	1551422	1442065*	1442052*	1442081*	1442078*
1457539*	1457652*	1457542*	1457665*	1457568*	1457681*	1457584*	1457704*	1457607*	1457720*
1552227	1551448	–	1414070	1552269	1557808	1441985*	1441970*	1442007*	1441998*
1457526*	1457649*	–	–	1457555*	1457678*	1457571*	1457694*	1457597*	1457717*
1439890	1432431	1436699	1432512	1437038	1437009	1424198	1424199	1424200	1424201
1436686	1436644	–	–	1436987	1436990	1424194	1424195	1424196	1424197
–	–	–	1551477	–	–	–	–	–	–
1116457	1551464	–	–	–	–	–	–	–	–
1027679 ⁵⁾	–	–	–	–	–	–	–	–	–
1027661 ¹⁾	–	–	–	–	–	–	–	–	–
–	1233779 ¹⁾	–	–	–	–	–	–	–	–
–	1249211 ⁵⁾	–	–	–	–	–	–	–	–
–	1233777 ⁶⁾	–	–	–	–	–	–	–	–
–	1249212 ¹⁾ 1233780 ²⁾	–	–	–	–	–	–	–	–
–	1027679 ¹⁾	–	–	–	–	–	–	–	–
–	1027661 ¹⁾	–	–	–	–	–	–	–	–
Male: 1413997 ¹⁾ / 1413996 ²⁾ / Female: 1414004 ¹⁾ / 1414003 ²⁾									
Male: 1413999 ¹⁾ / 1413998 ²⁾ / Female: 1414020 ¹⁾ / 1414005 ²⁾									
Housing panel thickness		1.0 mm ... 1.8 mm: 1419630 ⁵⁾ / 1.7 mm ... 2.5 mm: 1419631 ⁵⁾ / 2.4 mm ... 3.2 mm: 1419633 ⁵⁾ / 3.1 mm ... 3.9 mm: 1419634 ⁵⁾							
Black	Blue	Water blue	Red	Yellow	Green	Violet	Orange		
1419697	1417782	1417783	1417784	1417785	1417787	1417788	1417789		
Male: 1551493 ⁴⁾ / Female: 1552243 ⁴⁾									
Male: 1416145 ⁴⁾ / Female: 1416144 ⁴⁾									
Male: 1417984 ⁵⁾ / Female: 1417989 ⁵⁾									
Male: 1436709 ³⁾ / Female: 1432460 ³⁾									
Male: 1437892 ⁵⁾ / Female: 1437889 ⁵⁾									

⁷⁾ Female versions with push-pull outer interlocking also suitable for 8-pos. X-coded (CAT6_A), see Data section.

* Contact carrier with assembly pad.

SIGNAL

M12, solder connection, PCB mounting, for reflow soldering processes		4-pos.			
 Web code: #0215	Coding	A		D	
	Rated voltage	250 V		250 V	
	Rated current	4 A		4 A	
	Pin assignment	Male	Female	Male	Female
					
Two-piece, SMD contact carriers					
	Straight, SMD, tray packaging	1411924*	1411907	1411925*	1411912
	Straight, SMD, tape-on-reel	1411982*	1411974	1411983*	1411975
	Straight, shielded, SMD, tray packing, additional gasket for the device when not plugged in	1411955*	1411949	1411956*	1411950
	Straight, shielded, SMD, tape-on-reel, additional gasket for the device when not plugged in	1412010*	1412004	1412011*	1412005
	Straight, SMD, tray packing, additional gasket for the device when not plugged in	1411941*	1411935	1411942*	1411936
	Straight, SMD, tape-on-reel, additional gasket for the device when not plugged in	1411996*	1411990	1411997*	1411991
Two-piece, housing screw connections for SMD contact carriers					
new					
	Push-pull versions with O-ring				
	Rear mounting, M15 x 1 screw fastening	1107993 ²⁾	–	1107993 ²⁾	–
	Front mounting, M14 x 1 screw fastening	1107999 ³⁾	–	1107999 ³⁾	–
	Screw versions, rear mounting	M15 x 1 screw fastening			
	SPEEDCON versions, rear mounting	M15 x 1 screw fastening			
	Clip-in versions, tolerance-compensating, rear snap-in mounting	Threaded sleeve for housing panel thickness of 0.9 mm ... 1.6 mm			
		Threaded sleeve for housing panel thickness of 1.6 mm ... 2.3 mm			
		Threaded sleeve for housing panel thickness of 2.3 mm ... 3.0 mm			
	Fixing sleeve, can be used universally with any threaded sleeve	Color			
	Screw versions, front mounting	M14 x 1 screw fastening			
	Flat nut M14 x 1				
	Press-in versions, front mounting				

¹⁾ Not with additional gasket for the device when not plugged in.














²⁾ Distance from PCB upper edge to housing front plate inner edge: DU = 6 mm, also see page 8.

³⁾ Distance from PCB upper edge to housing front plate outer edge: DO = 9 mm, also see page 8.

5-pos.				8-pos.		12-pos.		17-pos.	
A		B		A		A		A	
60 V		60 V		30 V		30 V		30 V	
4 A		4 A		2 A		1.5 A		1.5 A	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1411926*	1411913	1411927*	1411914	1411928*	1411915	1411929*	1411916	1411930*	1411917
1411984*	1411976	1411985*	1411977	1411986*	1411978	1411987*	1411979	1411988*	1411980
1411957*	1411951	1411958*	1411952	1411959*	1411953	1411960*	1411954	1411961*	1411966 ¹⁾
1412012*	1412006	1412013*	1412007	1412014*	1412008	1412015*	1412009	1412016*	1412018 ¹⁾
1411943*	1411937	1411944*	1411938	1411945*	1411939	1411946*	1411940	1411947*	–
1411998*	1411992	1411999*	1411993	1412000*	1411994	1412001*	1411995	1412002*	–
1107993 ²⁾	–	–	–	–	–	–	–	–	–
1107999 ³⁾	–	–	–	–	–	–	–	–	–
Male: 1414000 ²⁾ / Female: 1414021 ²⁾									
Male: 1414002 ²⁾ / Female: 1414023 ²⁾									
Female: 1419569 ³⁾									
Female: 1419570 ³⁾									
Female: 1419571 ³⁾									
Black	Water blue			Green			Violet		
1419568	1419565			1419566			1419567		
Male: 1412078 ³⁾ / Female: 1412079 ³⁾									
1412077									
Male: 1412080 ³⁾ / Female: 1412081 ³⁾									







* Contact carrier with assembly pad.







SIGNAL

M8, with litz wires		3-pos.	
 Web code: #0216	Coding	 A	
	Rated voltage	50 V AC / 60 V DC	
	Rated current	4 A	
	Conductor cross-section	0.25 mm ²	
	Assembly		
	Pin assignment	Male 	Female 
Front mounting			
	M8 x 0.5 fastening thread	1500334	1500350
	M8 flat nut		
	M10 fastening thread	–	–
Rear mounting			
	M8 x 1 fastening thread	1453478	–
	M10 fastening thread	–	1456080
	M12 fastening thread	–	1453449
M8, solder connection, for wave soldering processes		3-pos.	
 Web code: #0218	Coding	 A	
	Rated voltage	50 V AC / 60 V DC	
	Rated current	4 A	
	Pin assignment	Male 	Female 
	Rear mounting, one-piece		
	M8 fastening thread, straight	1694334	–
	M12 fastening thread, straight	–	1694363
	M8 fastening thread, straight, shielded	1455997	–
	M8 fastening thread, angled, shielded	1456035	–
	M10 fastening thread, straight, shielded	–	1456116
	M10 fastening thread, angled, shielded	–	1456145
Rear mounting, two-piece			
	M8 fastening thread, straight	–	1524776
	M8 fastening thread, angled	1440070	1524788











4-pos.	6-pos.	8-pos.
A	A	A
50 V AC / 60 V DC	30 V AC / 30 V DC	30 V AC / 30 V DC
4 A	2 A	1.5 A
0.25 mm ²	0.14 mm ²	0.14 mm ²

Pre-assembled with 0.5 m long litz wires

Male	Female	Male	Female	Male	Female
					
1500347	1500363	1542664	1542677	-	-
1504071					
-	-	-	-	1424232	1424231
1453481	-	1453494	-	1424230	-
-	1456093	-	1456103	-	-
-	1453452	-	1453465	-	-

4-pos.	6-pos.	8-pos.			
A	A	A			
50 V AC / 60 V DC	30 V AC / 30 V DC	30 V AC / 30 V DC			
4 A	2 A	1.5 A			
Male	Female	Male	Female	Male	Female
					
1694347	-	1436521	-	1424238	-
-	1694376	-	1436534	-	1424237
1456019	-	1456022	-	1424236	-
1456048	-	1424244	-	-	-
-	1456129	-	1456132	-	1424235
-	1456158	-	1424243	-	-
-	1524789	-	-	-	-
1440096	1526169	-	-	-	-







SIGNAL

M8, solder connection, PCB mounting, for reflow soldering processes		3-pos.		4-pos.	
i Web code: #0219	Coding	A		A	
	Rated voltage	50 V AC / 60 V DC		50 V AC / 60 V DC	
	Rated current	4 A		4 A	
	Pin assignment	Male	Female	Male	Female
					
Two-piece, SMD contact carriers					
	Straight, SMD, tray packaging	1412225*	1412220	1412226*	1412221
	Straight, SMD, tape-on-reel	1412248*	1412243	1412249*	1412244
	Straight, shielded, SMD, tray packing, additional gasket for the device when not plugged in	1412240*	1412235	1412241*	1412236
	Straight, shielded, SMD, tape-on-reel, additional gasket for the device when not plugged in	1412263*	1412257	1412264*	1412258
	Straight, SMD, tray packing, additional gasket for the device when not plugged in	1412233*	1412227	1412234*	1412228
	Straight, SMD, tape-on-reel, additional gasket for the device when not plugged in	1412255*	1412250	1412256*	1412251
Two-piece, housing screw connections for SMD contact carriers					
	Screw versions, rear mounting	M12 x 1 screw fastening			
	Screw versions, front mounting	M10 x 0.75 screw fastening			
		Flat nut, M10 x 0.75			
	Press-in versions, front mounting				








¹⁾ Distance from PCB upper edge to housing front plate inner edge: DU= 6 mm, also see page 8.

²⁾ Distance from PCB upper edge to housing front plate outer edge: DO= 9 mm, also see page 8.













* Contact carrier with assembly pad.

4-pos.	5-pos.	6-pos.		8-pos.	
D	B	A		A	
60 V AC/DC	30 V AC/DC	30 V AC / 30 V DC		30 V AC / 30 V DC	
4 A	3 A	2 A		1.5 A	
Female	Female	Male	Female	Male	Female
					
–	1412222	–	1412223	–	1412224
–	1412245	–	1412246	–	1412247
–	1412237	–	1412238	–	1412239
1068454	1412259	–	1412261	–	1412262
–	1412229	–	1412230	–	1412232
1068453	1412252	–	1412253	–	1412254
Male: 1412505 ¹⁾ / Female: 1412506 ¹⁾					
Male: 1412502 ²⁾ / Female: 1412504 ²⁾					
1412508					
Male: 1412500 ²⁾ / Female: 1412501 ²⁾					

SIGNAL

M5		3-pos.		4-pos.	
 Web code: #0220	Coding	A		A	
	Rated voltage	60 V		60 V	
	Rated current	1 A		1 A	
	Conductor cross-section	0.14 mm ²		0.14 mm ²	
	Pin assignment	Male	Female	Male	Female
					
Front mounting, pre-assembled with 0.5 m long litz wires					
	M5 fastening thread	1530582	1530605	1530595	1530618
	Flat nut with M5 thread	1535901			
Rear mounting, one-piece for wave soldering processes					
	M5 fastening thread	1530621	1530647	1530634	1530650
	Flat nut with M5 thread	1535901			

DATA

M12 for networks			4-pos.		8-pos.	
 Web code: #0222	Coding		D		A	
	Pin assignment		Male	Female	Male	Female
						
Front/screw mounting, with assembled cable						
Ethernet 	M16 x 1.5, can be positioned, water blue, cable type 93E	2 m	–	1405837	–	–
Rear/screw mounting, with assembled cable						
Ethernet 	M16 x 1.5, water blue, cable type 93E	2 m	–	1405866	–	–
	M16 x 1.5, water blue, cable type 94B	5 m	–	–	–	1407877
	M16 x 1.5, water blue, cable type 94C	2 m	–	–	–	1412820
Rear/screw mounting, for wave soldering processes						
Ethernet 	M16 x 1.5, one-piece, contact carrier, water blue		1456514	1456527	1456530	1456543
Rear/screw mounting, with assembled cable						
 	Pg9, green, cable type 93B	0.5 m	1437805	1437766	–	–
		1 m	1437818	1437779	–	–
		2 m	1437821	1437782	–	–
		5 m	1437834	1437795	–	–
	M16 x 1.5, green, cable type 93C	2 m	–	1416209	–	–
	M16 x 1.5, green, cable type 93R	5 m	–	1416263	–	–
Rear/screw mounting, for wave soldering processes						
 	M16 x 1.5, one-piece, contact carrier, green		1456556	1456569	–	–

For additional 4-pos. D-coded and 8-pos. A-coded connectors, see Signal – M12 section, from page 14.

DATA
















M12 for networks		8-pos.	8-pos.	
 Web code: #0224	Coding	X (CAT6_A)	Y (hybrid)	
	Pin assignment	Female	Female	
				
Rear/screw mounting, with assembled cable				
 Ethernet 	M16 x 1.5, water blue, cable type 94F	0.5 m	1424135	–
		1 m	1424148	–
		2 m	1424151	–
		5 m	1424164	–
Hybrid 	M16 x 1.5, black, cable type 94H	0.5 m	–	1407504
		1 m	–	1407505
		2 m	–	1407506
		5 m	–	1407507
Rear/screw mounting, pre-assembled with 0.5 m long litz wires				
	M16 x 1.5	–	1407618	
Rear/screw mounting, for wave soldering processes				
 Ethernet Hybrid 	M16 x 1.5, one-piece, wave soldering	1424177	1407503	
	Pg9, one-piece, wave soldering	1404741	–	
Two-piece, contact carriers for wave and reflow soldering processes				
 Ethernet 	Straight, shielded, THR, blister packing	1402457	–	
	Straight, shielded, THR, tape-on-reel	1413446*	–	
	Straight, shielded, SMD, tray packing	1411964*	–	
	Straight, shielded, SMD, tape-on-reel	1081252*	–	
	Angled, shielded, wave soldering	1424180	–	
Hybrid 	Straight, shielded, THR, blister packing	–	1405225	
	Straight, shielded, THR, tape-on-reel	–	1413445*	
	Straight, shielded, SMD, tray packing	–	1411965*	
	Straight, shielded, SMD, tape-on-reel	–	1069566*	
	Angled, shielded, wave soldering	–	1424193	

Housing screw connections for THR and wave soldering contact carriers, see page 22.

Housing screw connections for SMD contact carriers, see page 24.










* Contact carrier with assembly pad.

DATA

M12 for networks		4-pos.		8-pos.		
 Web code: #0226	Coding	D		A		
	Pin assignment	Male	Female	Male	Female	
						
Rear/screw mounting, with assembled cable						
 	M16 x 1.5, red, cable type 93K	0.5 m	1419158	1419154	–	–
		1 m	1419159	1419155	–	–
		2 m	1419160	1419156	–	–
		5 m	1419161	1419157	–	–
Rear/screw mounting, for wave soldering processes						
 	M16 x 1.5, one-piece, contact carrier, red		1457979	1457966	–	–
Rear/screw mounting, with assembled cable						
 	M16 x 1.5, green, cable type 93B	0.5 m	1419138	1419134	–	–
		1 m	1419139	1419135	–	–
		2 m	1419140	1419136	–	–
		5 m	1419141	1419137	–	–
Rear/screw mounting, for wave soldering processes						
 	M16 x 1.5, one-piece, contact carrier, green		1456556	1456569	–	–
Rear/screw mounting, with assembled cable						
 	M16 x 1.5, black, cable type 970, 6-wire	0.5 m	–	–	1429059	1429091
		1 m	–	–	1429062	1429101
		2 m	–	–	1429075	1429114
		5 m	–	–	1429088	1429127










For additional 4-pos. D-coded and 8-pos. A-coded connectors, see Signal – M12 section, from page 14.

DATA

M12 for fieldbuses		5-pos.		
 Web code: #0229	Coding	B		
	Pin assignment	Male	Female	
				
Front/screw mounting, with assembled cable				
 	M16 x 1.5, can be positioned, violet, cable type 910	0.5 m	1525555	1525597
		1 m	1525568	1525607
		2 m	1519561	1519574
		5 m	1525571	1525610
Rear/screw mounting, with assembled cable				
 	Pg9, violet, cable type 910	0.5 m	1437481	1437449
		1 m	1437494	1437452
		2 m	1437504	1437465
		5 m	1437517	1437478
	M16 x 1.5, violet, cable type 910	0.5 m	1534342	1534384
		1 m	1534355	1534397
		2 m	1534368	1534407
		5 m	1534371	1534410
Rear/screw mounting, for wave soldering processes				
 	M16 x 1.5, one-piece, contact carrier, violet		1456475	1456488












For additional 5-pos. B-coded connectors, see Signal – M12 section, from page 14.

DATA

M12 for fieldbuses		5-pos.		
 Web code: #0230	Coding	B		
	Pin assignment	Male	Female	
				
Front/screw mounting, with assembled cable				
 	M16 x 1.5, green, cable type 910	0.5 m	1529629	1529742
		1 m	1530223	1529755
		2 m	1529726	1529768
		5 m	1529739	1529771
Rear/screw mounting, with assembled cable				
 	Pg9, green, cable type 900	0.5 m	1437643	1437601
		1 m	1437656	1437614
		2 m	1437669	1437627
		5 m	–	1437630
	Pg9 EMC nut	1440177		
	M16 x 1.5, green, cable type 900	0.5 m	1534504	1534546
		1 m	1534517	1534559
		2 m	1534520	1534562
		5 m	1534533	1534575
	M16 x 1.5 EMC nut	1440164		
Rear/screw mounting, for wave soldering processes				
 	M16 x 1.5, one-piece, contact carrier, green	1456572	1456585	
	M16 x 1.5 EMC nut	1440164		











For additional 5-pos. B-coded connectors, see Signal – M12 section, from page 14.

DATA

M12 for fieldbuses		5-pos.		
 Web code: #0231	Coding	A		
	Pin assignment	Male	Female	
				
Front/screw mounting, with assembled cable				
 	M16 x 1.5, violet, cable type 920	0.5 m	1525623	1525678
		1 m	1525636	1525681
		2 m	1525649	1525694
		5 m	1525652	1525704
		Rear/screw mounting, with assembled cable		
 	Pg9, violet, cable type 920	0.5 m	1437562	1437520
		1 m	1437575	1437533
		2 m	1437588	1437546
		5 m	1437591	1437559
	Pg9 EMC nut	1440177		
	M16 x 1.5, violet, cable type 920	0.5 m	1534423	1534465
		1 m	1534436	1534478
		2 m	1534449	1534481
		5 m	1534452	1534494
	M16 x 1.5 EMC nut	1440164		
Rear/screw mounting, for wave soldering processes				
 	M16 x 1.5, one-piece, contact carrier, violet	1456491	1456501	
	M16 x 1.5 EMC nut	1440164		
	Pg9, one-piece, stainless steel (1.4404)	1554746	1554733	
	M16 x 1.5, one-piece, contact carrier, blue	1457953	1457940	




For additional 5-pos. A-coded connectors, see Signal – M12 section, from page 14.

DATA















M12 for fieldbuses		4-pos.		
 Web code: #0232	Coding	A		
	Pin assignment	Male	Female	
				
Rear/screw mounting, with assembled cable				
 	M16 x 1.5, red, cable type 990	0.5 m	–	1559819
		1 m	–	1559822
		2 m	–	1559835
		5 m	–	1559848
Rear/screw mounting, for wave soldering processes				
 	M16 x 1.5, one-piece, contact carrier, green	1457856	1457869	
Front/screw mounting, pre-assembled with 0.5 m long litz wires				
 	Pg9, shielded	1431432	1431429	
	Flat nut, Pg9	1504084		
Rear/screw mounting, for wave soldering processes, shielded				
	M16 x 1.5, one-piece, contact carrier, yellow	1457872	–	

For additional 4-pos. A-coded connectors, see Signal – M12 section, from page 14.

DATA













M12 for USB		USB
 Web code: #0235	Pin assignment	
Rear/screw mounting, for wave soldering processes		
	M12 x 1, Mini-B USB 2.0	

DATA

M8 for fieldbuses		4-pos.		5-pos.	
 Web code: #0237	Coding	D		B	
	Pin assignment	Male	Female	Male	Female
					
Front mounting, pre-assembled with 0.5 m long litz wires					
 	M10 fastening thread	–	–	1424234	1424233
Rear mounting, for wave soldering processes					
 Ethernet	M8 fastening thread, straight, shielded	1253761	–	1424242	–
 	M8 fastening thread, angled, shielded	1253764	–	1424240	–
	M10 fastening thread, straight, shielded	–	1253763	–	1424241
	M10 fastening thread, angled, shielded	–	1253765	–	1424239
Two-piece, SMD contact carriers for reflow soldering processes					
 	Straight, SMD, tray packaging	–	–	–	1412222
	Straight, SMD, tape-on-reel	–	–	–	1412245
	Straight, SMD, tape-on-reel, additional gasket for the device when not plugged in	–	–	–	1412252
	Shielded	–	–	–	1412259
	Straight, SMD, tray packaging, additional gasket for the device when not plugged in	–	–	–	1412229
	Shielded	–	–	–	1412237
 Ethernet	Straight, SMD, tape-on-reel	–	1068453	–	–
	Additional gasket for the device when not plugged in	–	1068454	–	–
	Shielded	–	–	–	–

Housing screw connections for SMD contact carriers, see page 28.

POWER

M12 up to 16 A/630 V		3(2+PE)-pos.		4 (3+PE)-pos.		
 Web code: #0238	Coding	S		S		
	Rated voltage	630 V		630 V		
	Rated current	16 A		12 A		
	Conductor cross-section	AWG 16		AWG 16		
	Pin assignment	Male	Female	Male	Female	
						
Front mounting, pre-assembled with 0.2/0.5 m long litz wires						
	M16 x 1.5 fastening thread, one-piece	1411655 ¹⁾	1411654 ¹⁾	1424139 ¹⁾	1424137 ¹⁾	
	Flat nut M16 x 1.5	1504097				
 	M16 x 1.5 fastening thread, XL versions, wrench size 19	AWG 16 litz wires	–	–	1411607 ¹⁾	1411605 ¹⁾
		2.5 mm ² litz wires	–	–	–	–
		PROFINET-specified, AWG 16 litz wires	–	–	–	–
		PROFINET-specified, 2.5 mm ² litz wires	–	–	–	–
	Flat nut M16 x 1.5	–	–	–	–	
	25 mm square flange, modular, mounting holes 4 x Ø 2.7 mm	–	–	1424131	–	
	Pre-assembled contact carrier, modular	–	–	1424129 ¹⁾	–	
Rear mounting, pre-assembled with 0.2/0.5 m long litz wires						
	M16 x 1.5 fastening thread, one-piece	1411653 ¹⁾	1411652 ¹⁾	1424132 ¹⁾	1424133 ¹⁾	
 	M16 x 1.5 fastening thread, XL versions, wrench size 19	AWG 16 litz wires	–	–	1411603 ¹⁾	1411598 ¹⁾
		2.5 mm ² litz wires	–	–	–	–
		PROFINET-specified, AWG 16 litz wires	–	–	–	–
		PROFINET-specified, 2.5 mm ² litz wires	–	–	–	–

L-coding, 4+FE-pos.: FE not connected to accessible metal parts, no protective function

¹⁾ With 0.5 m long litz wires ²⁾ With 0.2 m long litz wires

* Deviation from the standard color of black: gray contact carrier

4-pos.		5(4+FE)-pos.		5(4+PE)-pos.		6(5+PE)-pos.			
■ T		■ L		■ L		■ K		■ M	
63 V		63 V		63 V		630 V		630 V	
12 A		12 A / 16 A		12 A / 16 A		12 A / 16 A		8 A	
AWG 16		16 AWG/2.5 mm ²		16 AWG/2.5 mm ²		16 AWG/2.5 mm ²		AWG 16	
Male	Female	Male	Female	Male	Female	Male	Female	Male	Female
1424140 ¹⁾	1424138 ¹⁾	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
1411608 ¹⁾	1411606 ¹⁾	-	-	-	-	1425635 ²⁾	1425636 ²⁾	1415300 ²⁾	1415301 ²⁾
-	-	-	-	1415295 ²⁾	1415296 ²⁾	1415291 ²⁾	1415292 ²⁾	-	-
-	-	1425631 ²⁾	1425632 ²⁾	14256272)*	14256282)*	-	-	-	-
-	-	1425586 ²⁾	1425587 ²⁾	1425582 ²⁾ *	1425583 ²⁾ *	-	-	-	-
1504097									
1424131	-	-	-	-	-	-	-	-	-
1424130 ¹⁾	-	-	-	-	-	-	-	-	-
1424136 ¹⁾	1424134 ¹⁾	-	-	-	-	-	-	-	-
1411604 ¹⁾	1411599 ¹⁾	-	-	-	-	1425637 ²⁾	1425638 ²⁾	1415302 ²⁾	1415303 ²⁾
-	-	-	-	1415297 ²⁾	1415299 ²⁾	1415293 ²⁾	1415294 ²⁾	-	-
-	-	1425633 ²⁾	1425634 ²⁾	1425629 ²⁾ *	1425630 ²⁾ *	-	-	-	-
-	-	1425588 ²⁾	1425589 ²⁾	1425584 ²⁾ *	1425585 ²⁾ *	-	-	-	-

POWER








M12 up to 16 A/630 V for soldering processes		4 (3+PE)-pos.		4-pos.	
 Web code: #0240	Coding	S		T	
	Rated voltage	630 V		63 V	
	Rated current	12 A		12 A	
	Pin assignment	Male	Female	Male	Female
					
Two-piece, THR contact carriers					
	Straight, THR, blister packing	1406410	1406409	1406396	1406411
	Straight, THR, tape-on-reel	1418343	1418344	1418339 *	1418340 *
	Straight, shielded, THR, blister packing	–	–	1406397	1406412
	Straight, shielded, THR, tape-on-reel	–	–	1418341 *	1418342 *
Two-piece, SMD contact carriers					
	Straight, SMD, tray packaging	–	–	1411931 *	1411918
	Straight, SMD, tape-on-reel	–	–	1411989 *	1411981
	Straight, shielded, SMD, tray packaging	–	–	–	1411967
	Straight, shielded, SMD, tape-on-reel	–	–	–	1412019
	Straight, SMD, tray packing, additional gasket for the device when not plugged in	–	–	1411948 *	–
	Straight, SMD, tape-on-reel, additional gasket for the device when not plugged in	–	–	1412003 *	–
	Straight, shielded, SMD, tray packing, additional gasket for the device when not plugged in	–	–	1411962 *	–
	Straight, shielded, SMD, tape-on-reel, additional gasket for the device when not plugged in	–	–	1412017 *	–

For housing screw connections for S- and T-coded THR contact carriers, see page 22.

Housing screw connections for T-coded SMD contact carriers, see page 24.

* Contact carrier with assembly pad.

POWER

M12 up to 16 A/630 V for soldering processes		4-pos.		5(4+FE)-pos.		5(4+PE)-pos.		6(5+PE)-pos.	
 Web code: #0240	Coding	L		L		K		M	
	Rated voltage	63 V		63 V		630 V		630 V	
	Rated current	16 A		16 A		16 A		8 A	
	Pin assignment	Male	Female	Male	Female	Male	Female	Male	Female
									
One-piece, wave soldering, rear/screw mounting									
 	M16 x 1.5, XL versions, wrench size 19	–	–	1415337	1415338	–	–	–	–
	PROFINET- specified	1425592	1425593	1425590 ³⁾	1425591 ³⁾	–	–	–	–
Two-piece, THR contact carriers									
 	Straight, THR, tray packing *	–	–	1420817	1420818	1420819	1420821	1420822	1420823
	PROFINET- specified	1425603	1425604	1425594 ³⁾	1425595 ³⁾	–	–	–	–
	Straight, THR, tape-on-reel *	–	–	1420828	1420829	1420830	1420831	1420832	1420833
	PROFINET- specified	1425605	1425606	1425599 ³⁾	1425600 ³⁾	–	–	–	–
 	Straight, shielded, THR, tray packing *	–	–	1421314	1421315	–	–	–	–
	PROFINET- specified	1425639	1425640	1425597 ³⁾	1425598 ³⁾	–	–	–	–
	Straight, shielded, THR, tape-on-reel *	–	–	1421317	1421318	–	–	–	–
	PROFINET- specified	1425641	1425642	1425601 ³⁾	1425602 ³⁾	–	–	–	–
Two-piece, housing screw connections for K-, L-, and M-coded THR contact carriers									
	Front mounting Push-pull, M14 x 1	Male: 1108115 ²⁾							
	Front mounting Screw fastening M14 x 1	Male: 1420824 ²⁾ / Female: 1420825 ²⁾							
	Flat nut M14 x 1	1412077							
	Rear mounting Push-pull, M15 x 1	Male: 1108101 ¹⁾							
	Rear mounting, Screw fastening M15 x 1	Male: 1420826 ¹⁾ / Female: 1420827 ¹⁾							

K- and M-coding: PE applied to housing

L-coding, 4+FE-pos.: FE applied separately to the PCB, not connected to accessible metal parts, no protective function.

* Contact carrier with assembly pad.

¹⁾ Distance from PCB upper edge to housing front plate inner edge: DU = 6 mm, also see page 8.

²⁾ Distance from PCB upper edge to housing front plate outer edge: DO = 9 mm, also see page 8.




³⁾ Deviation from the standard color of black: gray contact carrier

SIGNAL

M12 connectors designed for assembly			4-pos.		5-pos.		8-pos.	
 Web code: #0242	Coding	Design	Male	Female	Male	Female	Male	Female
Push-in connection, conductor cross section: 0.14 mm² ... 0.75 mm²								
	A	Straight	1424657	1424655	1424649	1424652	-	-
		Angled	1424654	1424656	1424651	1424653	-	-
Push-in connection, conductor cross section: 0.14 mm² ... 0.75 mm², shielded								
	A	Straight	1424666	1424668	1424658	1424660	-	-
		Angled	1424667	1424669	1424659	1424661	-	-
	B	Straight	-	-	1424662	1424664	-	-
		Angled	-	-	1424663	1424665	-	-
IDC connection, conductor cross section: 0.14 mm² ... 0.34 mm²								
	A	Straight	1641691	1641688	-	-	-	-
IDC connection, conductor cross section: 0.14 mm² ... 0.5 / 0.75 mm²								
	A	Straight	-	-	1414600	1414601	1424433	1424434
IDC connection, conductor cross section: 0.34 mm² ... 0.75 mm²								
	A	Straight	1641785	1641772	-	-	-	-
IDC connection, conductor cross section: 0.14 mm² ... 0.5/0.75 mm², shielded								
	A	Straight	1413993	1413994	1413991	1413992	1414610	1414611
Crimp connection, shielded								
	A	Straight	1422850	1422852	1422850	1422852	-	-
		Angled	1422851	1422853	1422851	1422853	-	-
	Crimp contacts	0.14 mm ² ... 0.34 mm ²	1064040	1064041	1064040	1064041	-	-
		0.34 mm ² ... 1.0 mm ²	1423645	1423646	1423645	1423646	-	-
Crimp connection, shielded, with push-pull outer interlocking								
	A	Straight	1021815	1021817	1021815	1021817	-	-
Angled		1021816	1021818	1021816	1021818	-	-	
	Crimp contacts	0.14 mm ² ... 0.34 mm ²	1064040	1064041	1064040	1064041	-	-
		0.34 mm ² ... 1.0 mm ²	1423645	1423646	1423645	1423646	-	-



SIGNAL

M12 connectors designed for assembly			4-pos.		5-pos.		8-pos.	
 Web code: #0242	Coding	Design	Male	Female	Male	Female	Male	Female
Screw connection, outside cable Ø: 4 mm ... 6 mm								
	A	Straight	1662528	1681127	1663116	1662968	-	-
		Angled	1681101	1681143	1663129	1662984	-	-
Screw connection, outside cable Ø: 6 mm ... 8 mm								
	A	Straight	1523230	1696439	1681460	1681486	1513334	1513347
		Angled	-	-	1681473	1681499	-	-
Screw connection, outside cable Ø: 4 mm ... 6 mm, with SKINTOP® screw connection								
	A	Straight	1556870	1430381	1456466	1559000	-	-
		Angled	-	-	-	-	-	-
Screw connection, outside cable Ø: 6 mm ... 8 mm, with SKINTOP® screw connection								
	A	Straight	-	-	1556825	1556838	-	-
		Angled	-	-	1561742	1556812	-	-
Screw connection, outside cable Ø: 4 mm ... 6 mm, shielded								
	A	Straight	1693830	1694295	1693416	1694305	-	-
		Angled	1694279	-	1693429	-	-	-
Screw connection, outside cable Ø: 6 mm ... 8 mm, shielded								
	A	Straight	1501540	1515170	1694266	1694318	1511857	1511860
		Angled	-	-	1694282	1430433	-	-


M12 connectors designed for assembly, high-position			12-pos.		17-pos.			
 Web code: #0245	Coding	Design	Male	Female	Male	Female		
Piercecon® connection, conductor cross section: 0.14 mm²								
	A	Straight	1559592	1559631	1559602	1559644		
		Angled						
Solder connection, conductor cross section: 0.08 mm² ... 0.25 mm², shielded								
	A	Straight	1404410	1404411	-	-		
		Angled	1404412	1404413	-	-		




SIGNAL



M8 connectors designed for assembly			3-pos.		4-pos.	
 Web code: #0246	Coding	Design	Male	Female	Male	Female
IDC connection, conductor cross section: 0.08 mm² ... 0.25 mm²						
	 A	Straight	1441008	1441040	1441011	1441053
IDC connection, conductor cross section: 0.25 mm² ... 0.5 mm²						
	 A	Straight	1441024	1441066	1441037	1441079
Screw connection, conductor cross section: 0.14 mm² ... 0.5 mm²						
	 A	Straight	1501252	1506888	1501265	1506891
		Angled	1407583	1407582	1407585	1407584
Screw connection, conductor cross section: 0.14 mm² ... 0.5 mm², shielded						
	 A	Straight	1542884	1542907	1542897	1542910
Solder connection, conductor cross section: 0.08 mm² – 0.25 mm²						
	 A	Straight	1681156	1681172	1681169	1681185
		Angled	1699902	1529399	1554209	1513444
Solder connection, conductor cross section: 0.08 mm² ... 0.25 mm², shielded						
	 A	Straight	1506901	1506927	1506914	1506930
		Angled	1436453	1436479	1436466	1436482











Signal – cable connectors with IDC		3-pos.	4-pos.	5-pos.	8-pos.
 Web code: #0243	Cable cross section				
	0.14 mm ² ... 0.34 mm ² , unshielded	–	1641879	–	–
	0.34 mm ² ... 0.75 mm ² , unshielded	–	1642140	–	–
	0.5 mm ² ... 1.5 mm ² , unshielded	1414702	1414698	1414742	
	0.14 mm ² ... 0.75 mm ² , shielded	–	1414418	1414417	1414612

DATA




M12 connectors designed for assembly				4-pos.		5-pos.		8-pos.		
 Web code: #0249	Fieldbuses/ networks	Coding	Design	Male	Female	Male	Female	Male	Female	
Push-in connection, shielded										
	PROFINET	D	Straight	1424682	1424683	–	–	–	–	
			Angled	1424684	1424685	–	–	–	–	
	DeviceNet™ CANopen	A	Straight	–	–	1424670	1424672	–	–	
			Angled	–	–	1424671	1424673	–	–	
	CC-Link	A	Straight	1424699	1424700	–	–	–	–	
	INTERBUS	B	Straight	–	–	1424674	1424676	–	–	
			Angled	–	–	1424675	1424677	–	–	
							2-pos.			
							Male	Female		
	PROFIBUS DP	B	Straight	–	–	1424678	1424680	–	–	
Angled			–	–	1424679	1424681	–	–		
IDC connection, shielded										
	Ethernet	D/A	Straight	1411066	1411069	–	–	1421679	1421680	
			Angled	1553624	1553637	–	–	1553653	1553666	
	PROFINET	D	Straight	1411068	1411071	–	–	–	–	
			Angled	1554539	1554542	–	–	–	–	
CAT6 _A	X	Straight	–	–	–	–	1411043	1414586		
	DeviceNet™ CANopen	A	Straight	–	–	1422759	1422760	–	–	
	PROFIBUS PA	A	Straight	1413933	1413934	–	–	–	–	
							2-pos.			
							Male	Female		
	PROFIBUS DP	B	Straight	–	–	1413931	1413932	–	–	
Crimp connection, shielded										
	PROFINET	D	Straight	1422846	1422848	–	–	–	–	
			Angled	1422847	1422849	–	–	–	–	
	PROFINET CAT6 _A	X	Straight	–	–	–	–	1422844	–	
			Angled	–	–	–	–	1422845	–	
	Crimp contacts	0.14 mm ² ... 0.34 mm ²		–	1064040	1064041	–	–	1423643	–
		0.34 mm ² ... 1.0 mm ²		–	1423645	1423646	–	–	–	–
Crimp connection, shielded, with push-pull outer interlocking										
 Web code: #1831										
	PROFINET	D	Straight	1021830	1021832	–	–	–	–	
			Angled	1021831	1021834	–	–	–	–	
	PROFINET CAT6 _A	X	Straight	–	–	–	–	1021783	–	
			Angled	–	–	–	–	1021784	–	
	Crimp contacts	0.14 mm ² ... 0.34 mm ²		–	1064040	1064041	–	–	1423643	–
		0.34 mm ² ... 1.0 mm ²		–	1423645	1423646	–	–	–	–

Data – M12 connectors designed for assembly				4-pos.		5-pos.		8-pos.	
 Web code: #0249	Fieldbuses/ networks	Coding	Design	Male	Female	Male	Female	Male	Female
Piercecon® connection, shielded									
	CAT6 _A		Straight	–	–	–	–	1417430	–
			Angled	–	–	–	–	1417443	–

Data – cable connectors with IDC, shielded		3-pos.	4-pos.		8-pos.
 Web code: #0249	Fieldbuses/ networks	PROFIBUS	PROFINET	Ethernet	CAT6_A
	Cable cross section	0.25 mm ² ... 0.75 mm ²	0.14 mm ² ... 0.5 mm ²	0.14 mm ² ... 0.5 mm ²	0.14 mm ² ... 0.34 mm ²
		1420426	1414416	1414415	1414412

Power – M12 connectors designed for assembly				2+PE-pos.		3+PE-pos.		4+PE-pos.	
 Web code: #0252	Coding	Design	Male	Female	Male	Female	Male	Female	
Push-Lock connection, conductor cross section: 1.5 mm² ... 2.5 mm², shielded									
		Straight	1080225	1080227	1080220	1080222	–	–	
		Straight	–	–	–	–	1080231	1080228	
								4-pos.	
		Straight	–	–	–	–	1080215	1080218	
		Straight	–	–	–	–	1080239	1080237	
								4+FE-pos.	
	Straight	–	–	–	–	1080235	1080233		
Push-Lock connection, conductor cross section: 1.5 mm² ... 2.5 mm², unshielded									
								4-pos.	
		Straight	–	–	–	–	1151362	1151366	
								4+FE-pos.	
	Straight	–	–	–	–	1151368	1151390		

POWER

M12 connectors designed for assembly			2+PE-pos.		3+PE-pos.		4-pos.		
	S	Straight	1419639	1419640	1404641	1404642	–	–	
		Angled	1419641	1419642	1408985	1408987	–	–	
	T	Straight	–	–	–	–	1404643	1404644	
		Angled	–	–	–	–	1408988	1408989	
Screw connection, conductor cross section: 0.75 mm² ... 1.5 mm², unshielded									
			2+PE-pos.		3+PE-pos.		4+PE-pos.		
	Coding	Design	Male	Female	Male	Female	Male	Female	
	S	Straight	1027467	1027469	1027467	1027469	–	–	
	K	Straight	–	–	–	–	1027474	1027476	
								4-pos.	
	T	Straight	–	–	–	–	1027465	1027466	
	L	Straight	–	–	–	–	1027479	1007480	
								4+FE-pos.	
L	Straight	–	–	–	–	1027477	1027478		
Crimp contacts									
			S-, T-coding		K-, L-coding				
	Connection cross-section		Male	Female	Male	Female			
	1.5 mm ²		1029394	1029395	1029394	1029396			
	2.5 mm ²		1029388	1029390	1029388	1029392			
	PE male, 1.5 mm ²		1029398	–	–	1029398			
	PE male, 2.5 mm ²		1029389	–	–	1029389			
	PE female, 1.5 mm ²		–	1029400	1029401	–			
PE female, 2.5 mm ²		–	1029391	1029393	–				




Please order crimp contacts separately.

SIGNAL

Cables with M8 or M12 connectors (PUR)










 Web code: #0283						
	Cable length	Signal cable M8, 3-pos.	Signal cable M8, 4-pos.	Signal cable M12, 3-pos.	Signal cable M12, 4-pos.	Signal cable M12, 5-pos.
Straight connector, free cable end						
3 m	1681677	1681790	1668027	1668056	1669770	1682744
5 m	1681680	1681800	1668030	1668069	1669783	1682731
10 m	1693584	1694143	1682566	1682993	1683361	1500732
Straight female connector, free cable end						
3 m	1669725	1681855	1694499	1668111	1669835	1682948
5 m	1669628	1681868	1683510	1668124	1669848	1682951
10 m	1694101	1683484	1693034	1683002	1683374	1500758
Straight male connector, straight female connector						
0.3 m	1681907	1682142	1681509	1668357	1681583	1500884
0.6 m	1681910	1682155	1681512	1668360	1681596	1500897
1.5 m	1681923	1682168	1681525	1668373	1681606	1500907
3 m	1681936	1682171	1681538	1668386	1681619	1500910
Angled female connector, free cable end						
3 m	1669741	1681884	1694512	1668234	1669864	1682977
5 m	1669631	1681897	1694525	1668247	1669877	1682980
10 m	1694169	1694172	1694538	1681389	1694541	1500761

Cables with M12 push-pull connectors (PUR)

 Web code: #2679				
Cable length	Signal cable 4-pos.		Signal cable 5-pos.	
Straight male connector, straight female connector				
1.5 m	1224019			
Straight male connector, angled female connector				
1.5 m			1021834	

Additional cable qualities and cables with connectors in sizes M8 to M40 for signals, data, and power can be found at phoenixcontact.com.

Network cables with M8 connectors (PUR)

 Web code: #1656	  Ethernet 		  Ethernet 		  Ethernet 	
	4-pos. A-coded		4-pos. D-coded			
Cable length	Male, straight	Female, straight	Male, straight	Male, angled		
Free cable end						
1 m	1407344	–	1423703	1080526		
2 m	1407345	–	1423704	1080528		
5 m	1407346	–	1423705	1080530		
10 m	1407347	–	1423706	1080531		
Variable	1408719	1408716	–	–		
Male, straight						
1 m	1407348	–	1423707	1080538		
2 m	1407349	–	1423708	1080539		
5 m	1407350	–	1423709	1080540		
10 m	1407351	–	1423710	1080542		
Variable	1408718	1408715	–	–		
Male, angled						
1 m	–	–	–	1080532		
2 m	–	–	–	1080535		
5 m	–	–	–	1080536		
10 m	–	–	–	1080537		
RJ45 connector						
1 m	1407352	–	1423711	1080543		
2 m	1407353	–	1423712	1080544		
5 m	1407354	–	1423713	1080545		
10 m	1407355	–	1423714	1080546		
Variable	1408717	1408714	–	–		














Additional cable qualities and cables with connectors in sizes M8 to M40 for signals, data, and power can be found at phoenixcontact.com.

Network cables with M12 connectors (PUR)

 Web code: #0284	 Ethernet	Ethernet	Ethernet			
						
Cable length	X-coded	D-coded	Y-coded	D-coded	B-coded	A-coded
Straight male connector, free cable end						
1 m	1407467	1407356	1407487	1407495	–	–
2 m	1407468	1407357	1407488	1407496	1507243	1507421
5 m	1407469	1407358	1407489	1407497	1507256	1507434
10 m	1407470	1407359	1407490	1407498	1507269	1507447
15 m	–	–	–	–	1507272	1507450
Variable	1408648	1408713	1408642	1408640	1538047	1538102
Straight female connector, free cable end						
1 m	–	1407380	–	1407528	–	–
2 m	–	1407381	–	1407529	1507298	1507476
5 m	–	1407382	–	1407530	1507308	1507489
10 m	–	1407383	–	1407531	1507311	1507492
15 m	–	–	–	–	1507324	1507502
Variable	–	1408697	–	1408623	1538063	1538128
Straight male connector, straight female connector						
0.3 m	–	–	–	–	1507340	1507528
0.5 m	–	–	–	–	1507353	1507531
0.6 m	–	–	–	–	–	–
1 m	–	1407400	–	1407553	1507366	1507544
2 m	–	1407401	–	1407554	1507379	1507557
5 m	–	1407402	–	1407555	1507382	1507560
10 m	–	1407403	–	1407556	1507395	1507572
15 m	–	–	–	–	1507405	1507586
Variable	–	1408692	–	1408617	1538089	1538144
Straight male connector, straight male connector						
1 m	1407483	1407376	1407491	1407524	–	–
2 m	1407484	1407377	1407492	1407525	–	–
5 m	1407485	1407378	1407493	1407526	–	–
10 m	1407486	1407379	1407494	1407527	–	–
Variable	1408644	1408706	1408641	1408634	–	–
Termination resistors, M12 male						
					PROFIBUS 1507803	DeviceNet™/ CANopen® 1507816

Additional cable qualities and cables with connectors in sizes M8 to M40 for signals, data, and power can be found at phoenixcontact.com.

Network cables with M12 connectors (PUR)

 Web code: #0284						
						
Cable length	B-coded, straight	B-coded, angled	Stainless steel, A-coded, straight	Stainless steel, A-coded, angled	A-coded, straight	A-coded, angled
Male connector, free cable end						
2 m	1507065	–	1419092	1419097	1431173	–
5 m	1507078	–	1419093	1419098	1431186	–
10 m	1507081	–	1419094	1419099	1431199	–
15 m	1507094	–	1419095	1419100	1431209	–
20 m	–	–	1419096	1419101	–	–
Variable	1537983	1430970	–	–	1431322	1431335
Female connector, free cable end						
2 m	1507117	–	1419082	1419087	1431212	–
5 m	1507120	–	1419083	1419088	1431225	–
10 m	1507133	–	1419084	1419089	1431238	–
15 m	1507146	–	1419085	1419090	1431241	–
20 m	–	–	1419086	1419091	–	–
Variable	1538005	–	–	–	1431348	1431351
Straight male connector, straight female connector						
0.3 m	1507162	–	1419102	1419110	1431254	–
0.5 m	1507175	–	1419103	1419111	1431267	–
1 m	1507188	–	1419104	1419112	1431270	–
2 m	1507191	–	1419105	1419113	1431283	–
5 m	1507201	–	1419106	1419114	1431296	–
10 m	1507214	–	1419107	1419115	1431306	–
15 m	1507227	–	1419108	1419116	1431319	–
20 m	–	–	1419109	1419117	–	–
Variable	1538021	1431005	–	–	1431364	1431377
Angled male connector, angled female connector						
0.3 m	–	–	1419118	1419126	–	–
0.5 m	–	–	1419119	1419127	–	–
1 m	–	–	1419120	1419128	–	–
2 m	–	–	1419121	1419129	–	–
5 m	–	–	1419122	1419130	–	–
10 m	–	–	1419123	1419131	–	–
15 m	–	–	1419124	1419132	–	–
20 m	–	–	1419125	1419133	–	–
Variable	1431005	1431018	–	–	1431380	1431393

Additional cable qualities and cables with connectors in sizes M8 to M40 for signals, data, and power can be found at phoenixcontact.com.

POWER

Cables with M12 connectors (PUR)

 Web code: #1081							
	Coding	S	T	L	L	K	M
	Number of positions	3+PE	4	4	4+FE	4+PE	5+PE
	Conductor cross-section	1.5 mm ²	1.5 mm ²	2.5 mm ²	2.5 mm ²	2.5 mm ²	1.5 mm ²
	Cable length			PROFINET-specified	PROFINET-specified		
Straight male connector, free cable end, unshielded							
2 m	1408836	1408813	–	–	–	–	
3 m	–	–	1425066	1414887	1414870	1414953	
5 m	1408837	1408814	1425067	1414891	1414875	1414957	
10 m	1408838	1408815	1425028	1414895	1414879	1414961	
Straight female connector, free cable end, unshielded							
2 m	1408844	1408824	–	–	–	–	
3 m	–	–	1425074	1414790	1414788	1414910	
5 m	1408845	1408825	1425075	1414806	1414804	1414918	
10 m	1408846	1408826	1425076	1414823	1414821	1414926	
Angled female connector, free cable end, unshielded							
2 m	1408852	1408828	–	–	–	–	
3 m	–	–	1425078	1414786	1414784	1414907	
5 m	1408853	1408829	1425079	1414802	1414800	1414916	
10 m	1408854	1408830	1425080	1414819	1414817	1414924	
Straight male connector, free cable end, shielded							
3 m	1424105	1424121	–	1414888	1414871	1414954	
5 m	1424245	1424122	–	1414892	1414876	1414958	
10 m	1424107	1424123	–	1414896	1414880	1414962	
Straight female connector, free cable end, shielded							
3 m	1424097	1424113	–	1414791	1414789	1414911	
5 m	1424098	1424114	–	1414807	1414805	1414919	
10 m	1424099	1424115	–	1414824	1414822	1414927	
Angled female connector, free cable end, shielded							
3 m	1424101	1424117	–	1414787	1414785	1414908	
5 m	1424102	1424118	–	1414803	1414801	1414917	
10 m	1424103	1424128	–	1414820	1414818	1414925	

Additional cable qualities and cables with connectors in sizes M8 to M40 for signals, data, and power can be found at phoenixcontact.com.

Accessories

 Web code: #0559	Size	M5		M8		M12	
		Male connectors	Female connectors	Male connectors	Female connectors	Male connectors	Female connectors
Locking screws							
	Plastic	–	1533288	–	1682540	–	1680539
	Plastic for K-, L-, and M-coded versions	–	–	–	–	–	1092802
	Metal, with slotted screw head	–	–	–	–	–	1503302
	Metal, with hexagonal screw head	–	–	–	–	–	1414148
	Stainless steel V4A	–	–	–	–	–	1555538
Locking screws for SPEEDCON versions							
	Plastic	–	–	–	–	–	1553129
Sealing caps							
	Plastic	–	–	–	–	1560251	–
	Metal	–	–	–	–	1430488	–
Sealing elements for unused housing cutouts							
	Sealing plug, plastic, for Pg9/Pg11					1670235	
	Locking screw, metal, M16 x 1.5					1453368	
Plastic sealing caps and locking screws, with retaining strap							
	For cables			1430857	1430860	1430873	1430899
	With Ø 3 mm fastening eye			–	1441105	–	–
	With Ø 8 mm fastening eye			1441082	–	–	–
	With Ø 12 mm fastening eye			–	1441095	1456187	–
	With Ø 15 mm fastening eye			–	–	1456190	1456200
Metal sealing caps and locking screws, with fastening chain							
	With Ø 16 mm fastening eye			–	–	1430491	1414147
EMC hexagonal nuts with fine toothing for device connectors							
	With fine toothing facing inwards. This prevents visible scratch marks from appearing on the device surface.			M12 x 1		1440151	
				M15 x 1		1104648	
				M16 x 1.5		1440164	
				Pg9		1440177	
Seals for device connectors							
	O-ring for M8 socket housing, green, 5 x 0.8					1098590	
	O-ring for M8 socket housing, black, 7 x 1					1437070	
	O-ring for M12 socket housing, green, 8 x 1.3					1426211	
	O-ring for M12 fastening thread, black, 12 x 1.5					1424275	
	Flat gasket for M16 fastening thread, black, 13 x 16.6 x 1.5					1430394	
	Flat gasket for Pg9 fastening thread, black, 13 x 16.6 x 2					1556320	

Pin assignments and litz wire colors

Pin assignments of M5 signal connectors

Female, 3-pos.	Male, 3-pos.	Female, 4-pos.	Male, 4-pos.

Litz wire colors

Assignment: M5 male/female

Pin	Wire color		Wire color	
	3-pos.		4-pos.	
1	BN		BN	
2	–		WH	
3	BU		BU	
4	BK		BK	

Pin assignments of M8 signal connectors

Female, 3-pos.	Male, 3-pos.	Female, 4-pos.	Male, 4-pos.
Female, 6-pos.	Male, 6-pos.	Female, 8-pos.	Male, 8-pos.

Litz wire colors

Assignment: M8 male/female

Pin	Wire color		Wire color		
	3-pos.		4-pos.		
1	BN		BN		
2	–		WH		
3	BU		BU		
4	BK		BK		
		6-pos.		8-pos.	
1	BN		WH		
2	WH		BN		
3	BU		GN		
4	BK		YE		
5	GY		GY		
6	PK		PK		
7	–		BU		
8	–		RD		

Pin assignments of M12 signal connectors

Female, 4-pos., A-coded	Male, 4-pos., A-coded	Female, 4-pos., D-coded	Male, 4-pos., D-coded

Litz wire colors

Assignment: M12 male/female

Pin	Wire color		Wire color	
	4-pos. A-coded		4-pos. D-coded	
1	BN		YE	
2	WH		WH	
3	BU		OG	
4	BK		BU	

Pin assignments and litz wire colors

Pin assignments of M12 signal connectors

Female, 5-pos., A-coded	Male, 5-pos., A-coded	Female, 5-pos., B-coded	Male, 5-pos., B-coded
Female, 8-pos.	Male, 8-pos.	Female, 12-pos.	Male, 12-pos.
Female, 17-pos.	Male, 17-pos.		

Litz wire colors

Assignment: M12 male/female

Pin	5-pos. A-coded		5-pos. B-coded		Wire color	
	Wire color	Color	Wire color	Color	-	
1	BN		BN			
2	WH		WH			
3	BU		BU			
4	BK		BK			
5	GY		GY			
	8-pos.		12-pos.		17-pos.	
1	WH		BN		BN	
2	BN		BU		BU	
3	GN		WH		WH	
4	YE		GN		GN	
5	GY		PK		PK	
6	PK		YE		YE	
7	BU		BK		BK	
8	RD		GY		GY	
9	-		RD		RD	
10	-		VT		VT	
11	-		GYPK		GYPK	
12	-		RDBU		RDBU	
13	-		-		WHGN	
14	-		-		BNGN	
15	-		-		WHYE	
16	-		-		YEBN	
17	-		-		WHGY	

Pin assignments of M8 data connectors

Female, 4-pos., Ethernet	Male, 4-pos., Ethernet	Female, 5-pos., DeviceNet™, B-coded	Male, 5-pos., DeviceNet™, B-coded
Female, 4-pos., PROFINET, D-coded	Male, 4-pos., PROFINET, D-coded		

Assignment: PROFINET, 4-pos. D-coded

Pin	Wire color	Color	Signal PROFINET
1	YE		TD+
2	WH		RD+
3	OG		TD-
4	BU		RD-

Assignment: CANopen®/DeviceNet™, 5-pos. B-coded

Pin	Wire color	Color	Signal DeviceNet™
1	Shield		Drain
2	RD		V+
3	WH		CAN_H
4	BK		V-
5	BU		CAN_L

Assignment: Ethernet, 4-pos. A-coded

Pin	Wire color	Color	Signal Ethernet
1	YE		TD+
2	OG		TD-
3	WH		RD+
4	BU		RD-

Pin assignments and litz wire colors

Pin assignments of M12 data connectors

Female, 4-pos., A-coded	Male, 4-pos., A-coded	Female, 4-pos., D-coded	Male, 4-pos., D-coded	Female, 5-pos., B-coded	Male, 5-pos., B-coded
Female, 8-pos., A-coded	Male, 8-pos., A-coded	Female, 8-pos., X-coded	Female, 8-pos., Y-coded		

Assignment: PROFIBUS, 5-pos. B-coded

Pin	Wire color	Signal PROFIBUS
1	–	–
2	GN	A cable
3	–	–
4	RD	B cable
5	Flexible filler lead	–

Shield on housing

Assignment: CANopen®, 5-pos. A-coded

Pin	Wire color	Signal CANopen®
1	Shield	Drain
2	RD	V+
3	BK	V–
4	WH	CAN_H
5	BU	CAN_L

Shield on housing

Assignment: DeviceNet™, 5-pos. A-coded

Pin	Wire color	DeviceNet™ signal
1	Shield	Drain
2	RD	V+
3	BK	V–
4	WH	CAN_H
5	BU	CAN_L

Shield on housing

Assignment: INTERBUS, 5-pos. B-coded

Pin	Wire color	Signal
1	YE	DO
2	GN	DO
3	GY	DI
4	PK	DI
5	BN	COM
–	WH	NC

Shield on housing

Assignment: PROFINET, EtherCAT®, Sercos, 4-pos. D-coded

Pin	Wire color	Signal
1	YE	TD+
2	WH	RD+
3	OG	TD–
4	BU	RD–

Assignment: Ethernet, 4-pos. D-coded

Pin	Wire color	Signal Ethernet
1	WHOG	TD+
2	WHGN	RD+
3	OG	TD–
4	GN	RD–

Shield on housing

Assignment: VARAN, 8-pos., A-coded

Pin	Wire color	Signal
1	n. c.	
2	OG	TD–
3	WHOG	TD+
4	n. c.	
5	WHGN	RD+
6	BU	
7	BN	
8	GN	RD–

Assignment: AS-Interface, 4-pos. A-coded

Pin	Wire color	Signal
1	BU	AS-i+
2	WH	
3	BN	AS-i–
4	BK	

Assignment: CC-Link, 4-pos. A-coded

Pin	Wire color	Signal
1	Shield	SLD
2	WH	DS
3	YE	DG
4	BU	DA

Assignment: FOUNDATION Fieldbus, 4-pos. A-coded

Pin	Wire color	Signal
1	BU	DATA–
2	OG	DATA+
3		Shield
4		

Pin assignments and litz wire colors

Assignment: Ethernet, 8-pos. A-coded			
Pin	Wire color		Signal Ethernet
1	WHBU		D3-
2	WHBN		D4+
3	BN		D4-
4	OG		D1-
5	WHGN		D2+
6	WHOG		D1+
7	BU		D3+
8	GN		D2-

Assignment: Ethernet, 8-pos. X-coded			
Pin	Wire color		Signal Ethernet
1	WHOG		D1+
2	OG		D1-
3	WHGN		D2+
4	GN		D2-
5	WHBN		D4+
6	BN		D4-
7	WHBU		D3-
8	BU		D3+

Assignment: Ethernet hybrid, 8-pos. Y-coded			
Pin	Wire color		Signal Ethernet
1	WHOG		D1+
2	OG		D1-
3	WHGN		D2+
4	GN		D2-
5	BU		D4+
6	WH		D4-
7	BN		D3-
8	BK		D3+

Pin assignments of M12 power connectors

Female, 2+PE, S-coded	Male, 2+PE, S-coded	Female, 3+PE, S-coded	Male, 3+PE, S-coded	Female, 4-pos., T-coded	Male, 4-pos., T-coded	Female, 4-pos., L-coded	Male, 4-pos., L-coded
Female, 4+FE, L-coded	Male, 4+FE, L-coded	Female, 4+PE, K-coded	Male, 4+PE, K-coded	Female, 5+PE, M-coded	Male, 5+PE, M-coded		

Assignment: 2+PE, S-coded		
Pin	Wire color	
1	BK1	
3	BK2	
PE	GNYE	

Assignment: 3+PE, S-coded		
Pin	Wire color	
1	BK1	
2	BK2	
3	BK3	
PE	GNYE	

Assignment: 4-pos. T-coded		
Pin	Wire color	
1	BN	
2	WH	
3	BU	
4	BK	

Assignment: 4-pos. L-coded		
Pin	Wire color	
1	BN	
2	WH	
3	BU	
4	BK	

Assignment: 4+PE, K-coded		
Pin	Wire color	
1	BK1	
2	BK2	
3	BK3	
4	BK4	
PE	GNYE	

Assignment: 5+PE, M-coded		
Pin	Wire color	
1	BK1	
2	BK2	
3	BK3	
4	BK4	
5	BK5	
PE	GNYE	

Assignment: 4+FE, L-coded		
Pin	Wire color	
1	BN	
2	WH	
3	BU	
4	BK	
FE	GY	

Excellent services

Throughout your development process, Phoenix Contact will provide excellent services that make a difference. Discover how modern configurators, comprehensive technical data, and free product samples can make your daily work easier. As your partner, we will support you in the design-in process all the way to the development of tailored connection and housing solutions.

The easy way to more choice

Choose online from 60,000 products and find the right solution quickly:

- Intuitive filter and search functions
- Comprehensive technical data and downloads such as drawings and 3D models
- Personal on-site consultation

The easy way to more individuality

Customize your products with colors, printing, and special designs:

- Customer-specific versions
- Customized new products
- Intuitive online configurators





Simple selection with filters and technical data



There is a separate detail page for every product



There is a data sheet available for download for each item



Thanks to the global network, Phoenix Contact is always close to you



Device connection technology can be comprehensively configured



Housing parts and connection technology are easy to configure



Cable and assembly systems can be configured easily



Phoenix Contact provides support, from the initial idea all the way to series production

Further information on the Phoenix Contact services: Simply enter the web code in the search field on our website.

 Web code: #2594

Excellent services

Phoenix Contact supports device designers with excellent services, even beyond the design-in process. Benefit from flexible procurement and global availability of our items. As your expert partner, our experts will keep you up-to-date on the latest technologies and trends.

The easy way to more flexibility

Use our different procurement channels and benefit from worldwide availability.

- All products can easily be ordered online
- Free sample service
- Globally reliable logistics network thanks to direct shipping or distribution

The easy way to more know-how

Always stay up-to-date about technologies and trends with us as your reliable partner.

- Technology, industry, and design-in experts by your side
- We will provide you with tailored training programs – either on site or digitally
- Free online seminars, seminars, and video tutorials





The online sample service is available in a large number of countries



Find the desired product quickly with intuitive filters



Product samples are available with free shipping



Reliable logistics worldwide



Keep up-to-date on new products, trends, and technologies



We will provide you with tailored training programs – either on site or digitally




Stay updated via Phoenix Contact apps and the Phoenix Contact YouTube channel



Remain reliably updated with the Phoenix Contact newsletter

Further information on the Phoenix Contact services: Simply enter the web code in the search field on our website.

 **Web code: #2594**

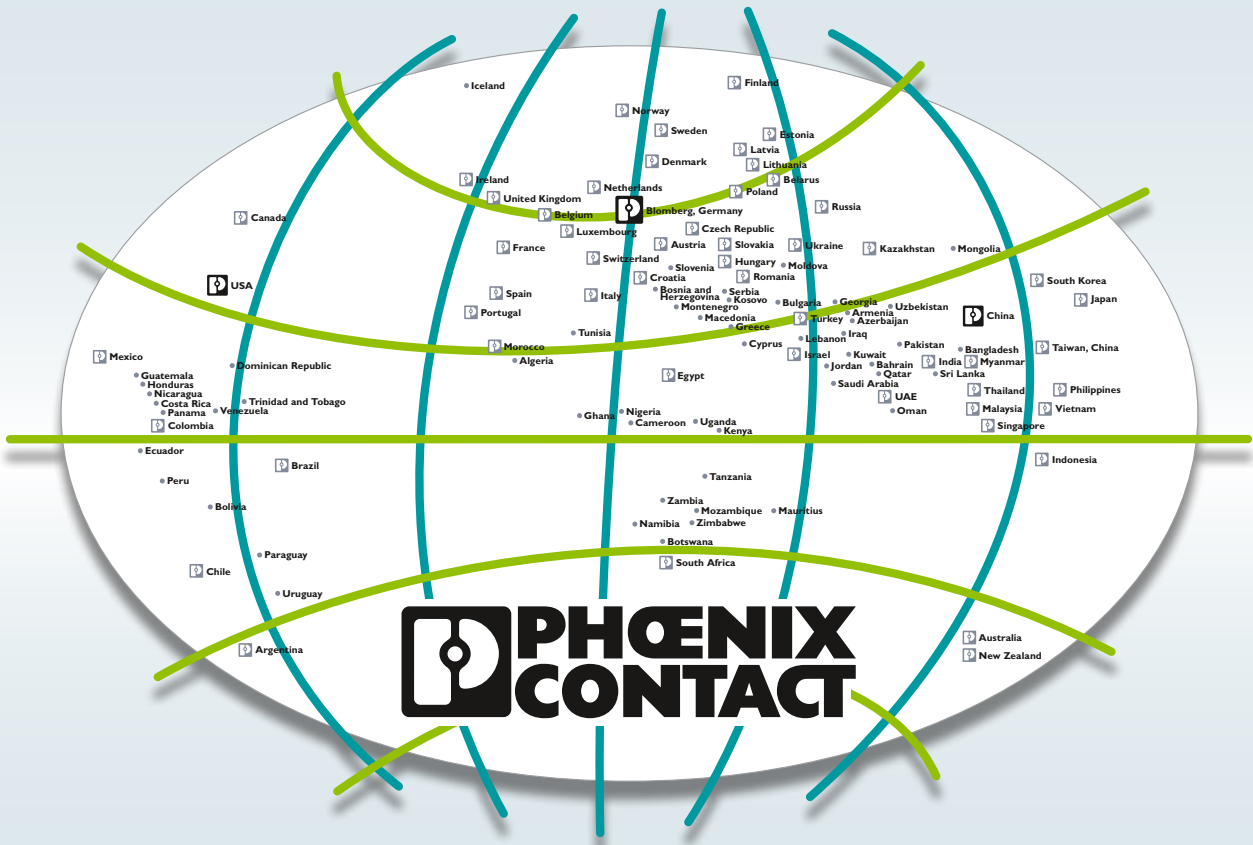

Open communication with customers and partners worldwide

Phoenix Contact is a global market leader based in Germany. We are known for producing future-oriented components, systems, and solutions in the fields of electrical engineering, electronics, and automation. With a global network reaching across more than 100 countries with over 17,600 employees, we maintain close relationships with our customers, something we believe is essential for our common success.

Our wide variety of innovative products makes it easy for our customers to implement the latest technology in a variety of applications and industries. We focus on developing the fields of energy, infrastructure, process, and factory automation.

You can find your local partner at
phoenixcontact.com