

## Surge protection device - DT-LAN-CAT.6+ - 2881007

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Surge protection in accordance with Class E<sub>A</sub> (CAT6<sub>A</sub>), for Gigabit Ethernet (up to 10 Gbps), token ring, FDDI/ CDDI, ISDN, and DS1. Suitable for Power over Ethernet (PoE+) "Mode A" and "Mode B". RJ45 attachment plug with separate grounding cable and ground connection snap-on foot for NS 35 DIN rails.

### Why buy this product

- Reliable transmission speeds up to 10 Gbps
- Protective adapter for eight signal paths via RJ45 connector
- Suitable for category 6 high-speed data networks
- Can be installed in a control cabinet by removing the ground connection adapter



### Key Commercial Data

Packing unit	1 pc
GTIN	 4 046356 151900
Weight per Piece (excluding packing)	315.1 g
Custom tariff number	85363010
Country of origin	Germany

### Technical data

#### Dimensions

Height	102 mm
Width	25 mm
Depth	63.5 mm

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 70 °C

#### General

Housing material	Zinc die-cast
------------------	---------------

# Surge protection device - DT-LAN-CAT.6+ - 2881007

## Technical data

### General

Color	silver/black
Mounting type	Connection-specific attachment plug and DIN rail, 35 mm
Type	Attachment plug for DIN rail mounting
Number of positions	8
Direction of action	Line-Line & Line-Ground/Shield

### Protective circuit

IEC test classification	B2
	C1
	C2
	C3
	D1
VDE requirement class	B2
	C1
	C2
	C3
	D1
Maximum continuous voltage $U_C$	$\leq 3.3$ V DC
Maximum continuous voltage $U_C$ (wire-wire)	$\leq 3.3$ V DC ( $\pm 60$ V DC/PoE+)
Maximum continuous voltage $U_C$ (wire-ground)	$\leq 180$ V DC
Nominal current $I_N$	$\leq 1.5$ A (25 °C)
Operating effective current $I_C$ at $U_C$	$\leq 1$ $\mu$ A
Residual current $I_{PE}$	$\leq 400$ $\mu$ A
Nominal discharge current $I_n$ (8/20) $\mu$ s (Core-Core)	100 A
Nominal discharge current $I_n$ (8/20) $\mu$ s (Core-Earth)	2 kA (per signal pair)
Total surge current (8/20) $\mu$ s	10 kA
Nominal pulse current $I_{an}$ (10/700) $\mu$ s (Core-Core)	$\leq 40$ A
Nominal pulse current $I_{an}$ (10/700) $\mu$ s (Core-Earth)	$\leq 160$ A
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) spike	$\leq 85$ V (PoE)
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) spike	$\leq 700$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Core) static	$\leq 9$ V
Output voltage limitation at 1 kV/ $\mu$ s (Core-Earth) static	$\leq 700$ V
Residual voltage at $I_n$ (conductor-conductor)	$\leq 15$ V
	$\leq 100$ V (PoE)
Voltage protection level $U_p$ (core-core)	$\leq 9$ V (B2 - 1 kV/25 A)
	$\leq 100$ V (B2 - 1 kV/25 A - PoE)
	$\leq 15$ V (500 V/100 A)
Voltage protection level $U_p$ (core-ground)	$\leq 900$ V (B2 - 4 kV/100 A)
	$\leq 700$ V (C2 - 4 kV/2 kA)
Response time $t_A$ (Core-Core)	$\leq 1$ ns
Response time $t_A$ (Core-Earth)	$\leq 100$ ns

# Surge protection device - DT-LAN-CAT.6+ - 2881007

## Technical data

### Protective circuit

Input attenuation aE, sym.	≤ 1 dB (up to 100 MHz/direct measuring)
	≤ 1 dB (up to 250 MHz/direct measuring)
	≤ 3 dB (up to 500 MHz/direct measuring)
Near-end crosstalk attenuation	≥ 35 dB (250 MHz/100 Ω/link)
	≥ 45 dB (100 MHz / 100 Ω / Link)
	≥ 27 dB (500 MHz / 100 Ω / Link)
	≥ 39 dB (250 MHz/100 Ω/direct measuring)
Capacity (Core-Core)	typ. 12 pF (f= 1 MHz / VR= 0 V)
Capacity (Core-Earth)	typ. 2 pF (f= 1 MHz / VR= 0 V)
Surge protection fault message	None
Impulse durability (conductor-conductor)	B2 - 1 kV / 25 A
Impulse durability (conductor-ground)	B2 - 4 kV/100 A
	C2 - 4 kV/2 kA
	D1 - 1 kA

### Connection data

Connection method	RJ45
Connection type IN	RJ45 socket
Connection type OUT	RJ45 socket

### Connection, equipotential bonding

Connection method	Cable connection
-------------------	------------------

## Classifications

### eCl@ss

eCl@ss 4.0	27140201
eCl@ss 4.1	27130801
eCl@ss 5.0	27130801
eCl@ss 5.1	27130801
eCl@ss 6.0	27130807
eCl@ss 7.0	27130807
eCl@ss 8.0	27130809

### ETIM

ETIM 2.0	EC000943
ETIM 3.0	EC000943
ETIM 4.0	EC000943
ETIM 5.0	EC000943

### UNSPSC

UNSPSC 6.01	30212010
-------------	----------

# Surge protection device - DT-LAN-CAT.6+ - 2881007

## Classifications

### UNSPSC

UNSPSC 7.0901	39121610
UNSPSC 11	39121610
UNSPSC 12.01	39121610
UNSPSC 13.2	39121620

## Approvals

### Approvals

Approvals

UL Listed / EAC / EAC

Ex Approvals

Approvals submitted

### Approval details

UL Listed

EAC

EAC

## Accessories

Accessories

Patch cable

Patch cable - FL CAT6 PATCH 0,5 - 2891288



Patch cable, CAT6, pre-assembled, 0.5 m

# Surge protection device - DT-LAN-CAT.6+ - 2881007

## Accessories

Patch cable - FL CAT6 PATCH 1,0 - 2891385



Patch cable, CAT6, pre-assembled, 1.0 m


Patch cable - FL CAT6 PATCH 2,0 - 2891589




Patch cable, CAT6, pre-assembled, 2.0 m

## Drawings

Dimensional drawing

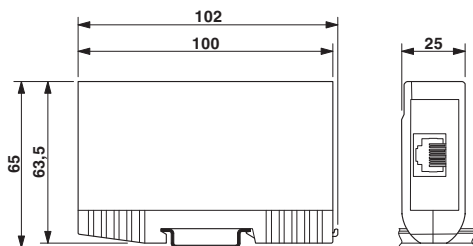

Circuit diagram

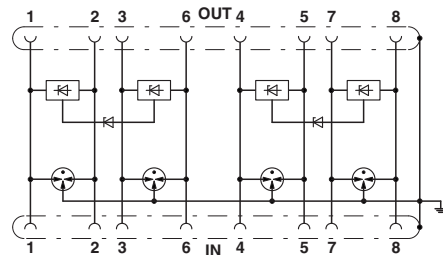

# Surge protection device - DT-LAN-CAT.6+ - 2881007

Application drawing

