

XACA02

empty pendant control station XAC-A - 2
vertical openings



Main

| | |
|-----------------------------|---|
| Commercial Status | Commercialised |
| Range of product | Harmony XAC |
| Product or component type | Pendant control station |
| Control station name | XACA |
| Control station type | Double insulated |
| Enclosure material | Polypropylene |
| Electrical circuit type | Control circuit |
| Enclosure type | Empty enclosure |
| Number of cut-out | 2 cut-outs |
| Cable entry | Rubber sleeve with stepped entry, cable outer diameter: 8...26 mm |
| Guard rail | Without |
| Cutout in base of enclosure | With |

Complementary


| | |
|----------------------------------|----------------|
| Control station colour | Yellow |
| Vertical operator cut-out centre | 30 mm |
| Mechanical durability | 1000000 cycles |
| Product weight | 0.44 kg |

Environment

| | |
|--|--|
| Standards | EN/IEC 60204-32 EN/IEC 60947-5-1 UL 508 CSA C22.2 No 14 |
| Product certifications | CCC GOST |
| Protective treatment | TH |
| Ambient air temperature for operation | -25...70 °C |
| Ambient air temperature for storage | -40...70 °C |
| Vibration resistance | 15 gn (f = 10...500 Hz) conforming to IEC 60068-2-6 |
| Shock resistance | 100 gn conforming to IEC 60068-2-27 |
| Class of protection against electric shock | Class II conforming to IEC 61140 |
| IP degree of protection | IP65 conforming to IEC 60529 |
| IK degree of protection | IK08 conforming to EN 50102 |

Dimensions

Below drawing shows a product with 6 cut-outs. Select the number of cut-outs according to the product characteristics in order to get b, b1 and c dimensions.

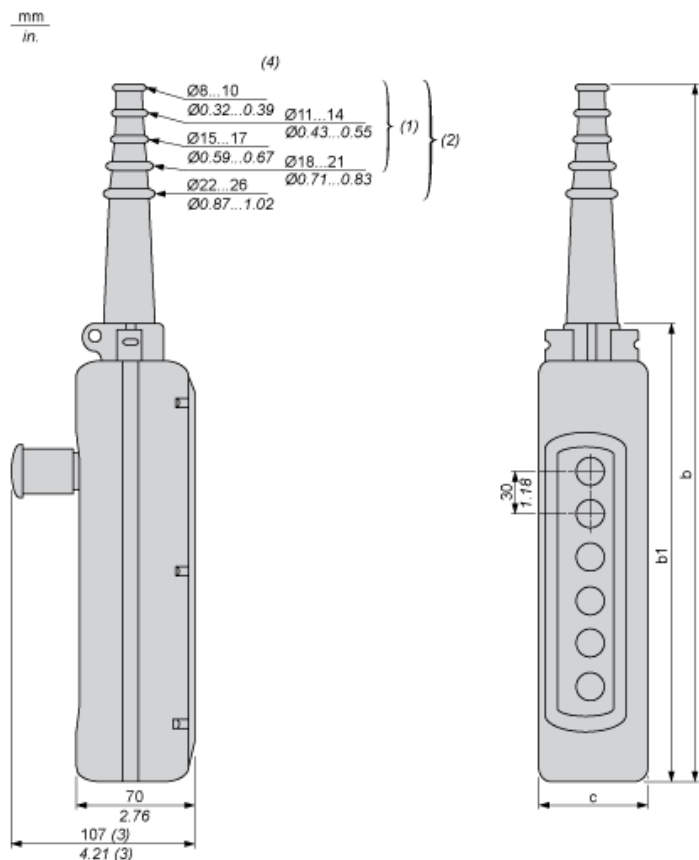

- (1) For 2 and 3-way XAC A stations.
- (2) For 4 to 8-way XAC A stations.
- (3) With trigger action Emergency stop head operator
- (4) Internal \varnothing

Dimensions in mm

| Number of cut-outs | 2 | 3 | 4 | 5 | 6 | 8 | 12 |
|--------------------|-----|-----|-----|-----|-----|-----|-----|
| b | 314 | 314 | 440 | 440 | 500 | 560 | 680 |
| b1 | 190 | 190 | 250 | 250 | 310 | 370 | 490 |
| c | 80 | 80 | 80 | 80 | 80 | 80 | 92 |

Dimensions in in.

| Number of cut-outs | 2 | 3 | 4 | 5 | 6 | 8 | 12 |
|--------------------|-------|-------|-------|-------|-------|-------|-------|
| b | 12.36 | 12.36 | 17.32 | 17.32 | 19.68 | 22.05 | 26.77 |
| b1 | 7.48 | 7.48 | 9.84 | 9.84 | 12.20 | 14.57 | 19.29 |
| c | 3.15 | 3.15 | 3.15 | 3.15 | 3.15 | 3.15 | 3.62 |