



Sample image

LATERAL AUXILIARY CONTACTS

for KG20 - KG317 and KH(R)16 - KH(R)25B

Designation: K0.H010/A11-E


Kind of contact operation: "A" not overlapping

Contact combination: "11" 1 NO + 1 NC


Type of mounting: "E" for type of mounting E

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
			Tension (V) AC / DC		
			500 AC		
UL60947-4-1 , UL508					
Nominal Voltage					
			Tension (V) AC / DC		
			600 AC		
Tension assignée d'isolement Ui					
			Tension (V) AC / DC		
			600 AC		
Rated thermal current					
		Intensité (A)	Température Ambiante (°)		Additional Text
		10	0 - 40		--
Pilot duty rating code					
Duty Code					
A600					
General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	600	10	1	1	1
General Information					
Text					
- Use copper wire only. Do not coat the wire end with tin.					
CSA					
Temp. rating of wire					
		Temperature rating (°C)	Intensité (A)		Text
		75			-- only
GENERAL TECHNICAL INFORMATION					
Size of conductor					
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
flexible wire	Max.			2 AWG 16	Copper
flexible wire	Max.			2 1,5mm²	Copper
Single-core or stranded wire	Max.			2 AWG 14	Copper
Single-core or stranded wire	Max.			2 1,5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.			2 1,5mm²	Copper
Stripping length					
			Length (mm) --		
					
			6		
Recommandations concernant le tournevis					
Type			Value		
Tournevis cruciforme			PH1		
Slot screwdriver according to DIN 5264			0,6x3,5		
Tightening torque of screws					
			tightening torque (Nm)		tightening torque (lb-in)
			0.40		3.50

KG20 - KG100C

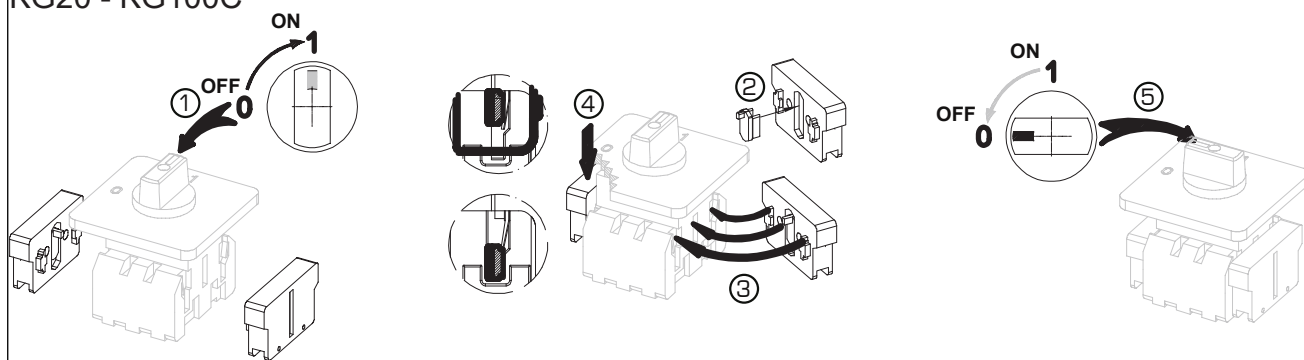

KH16 - KHR25B

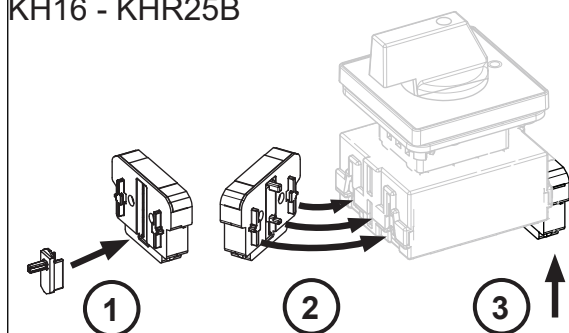

33 41
34 42