


MD-CE 360i/8

Item number **GTIN**
 EP10510007 4015120510007

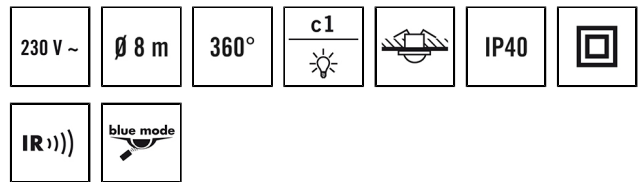

Product description

- Recessed ceiling-mounted motion detector with **360° field of detection**
- **Range of up to 8 m** across at a recommended installation height of 3 m (maximum mounting height 5 m), for use in small rooms, passageways, toilets, small offices, hallways with no or little natural lighting
- 16 A high-performance relay (tungsten pre-contact)
- Default settings ensure immediate operability

Offers special product features like:

- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App



Technical data

GENERAL

Device category	Ceiling-mounted motion detector
Product information	Please note the Explanation of circuit breaker in the download area of the product!
Included in delivery	Includes lens mask
User interface	IR remote control with "blue mode" technology
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Product-specific information	Configuration only possible via ESY-Pen, ESY-App and remote control
Warranty	5 years

ATTACHMENT

Installation type	Recessed mounting
Installation position	Ceiling
Installation dimension	Installation depth: 67 mm, Ø 68 mm
Type of connection	Push terminal
Connectable wire cross section	0.75 – 2.5 mm ²

HOUSING

Dimensions	Height/Depth 24 mm, Ø 82 mm
Weight	125.966 g
Material	UV-stabilised polycarbonate
Protection type	IP40
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 – 93 %, non-condensing
Colour	opal matt

ELECTRICAL VERSION

Control system	ON/OFF
Protection class	II
Nominal voltage	230 V ~ / 50 Hz
In-rush current	800 A / 200 µs
Power consumption	0.3 W

SENSORS

Detection angle	360°
Detection range diagonally	Ø 8 m
Detection range head-on	Ø 6 m
Field of detection	up to 50 m ²
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 – 2000 lx

CHANNELS (LIGHTING / HVAC)

Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Number of parallel switchable detectors	10
Slave input	–
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	0 s
Switching delay from "light to dark"	30 s
Constant light control	–
Channel	C1 Lighting
Function	Switching

DATA SHEET

MD-CE 360i/8

Item number	GTIN
EP10510007	4015120510007

Switching capacity	230 V/50 Hz, 16 AX 2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5) 600 W LED
Switch contact	make contact / non-floating

Push button input	✓
Impulse mode	✓
Switch-off delay time	60 s...30 min (adjustable in steps)

Factory settings


GENERAL	
Sensitivity	100 %
CHANNELS (LIGHTING / HVAC)	
Channel	C1 Lighting

Operating mode	fully automatic
Level of brightness/switching threshold	100 lx
Switch-off delay time	5 min


Accessories

Product designation	Item number	Product description	GTIN
Electrical accessories			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
Protection			
BASKET GUARD ROUND SMALL	EM10425615	Basket guard for presence and motion detectors and smoke detectors, Ø 165 mm, height 70 mm	4015120425615
Remote control			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL MDi/PDi	EM10425509	IR remote control for presence detectors and motion detectors	4015120425509
REMOTE CONTROL USER	EM10016011	IR remote control for end users	4015120016011

Dimension drawing

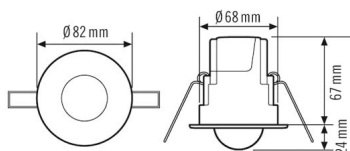

Field of detections




Detection range

Diagonally (A)	Ø 8 m
Frontal (B)	Ø 6 m

MD-CE 360i/8


Item number GTIN
 EP10510007 4015120510007

Circuit diagram

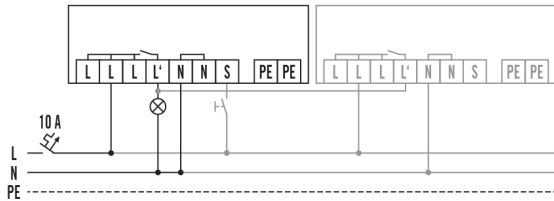


Standard with optional control via a closing button and parallel wiring of max. ten devices.

Circuit diagram

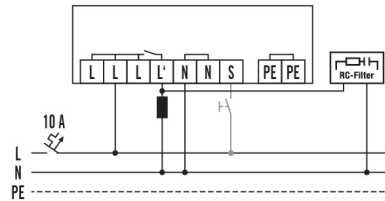

When connecting inductors (e.g. relays, contactors, ballasts) the use of a filter (A) may be necessary.

Circuit diagram

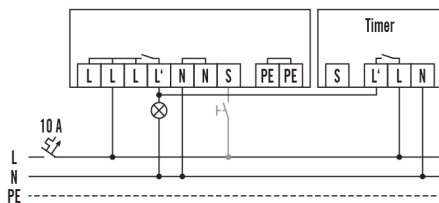

Standard operation with automatic stairwell light and optional control via a closing button.

Detailed product description

- Recessed ceiling-mounted motion detector with **360° field of detection** for demand-responsive lighting control and therefore noticeable energy cost reductions
- **range of up to 8 m** across for use in small rooms, passageways, toilets, small offices or hallways with very little or no natural lighting
- 16 A high-performance relay (tungsten pre-contact), ideal for switching capacitive loads such as electronic ballasts, parallel-compensated fluorescent lamps, compact fluorescent lamps, energy saving lamps
- Default settings ensure immediate operability
- Simple programming using remote control with "blue mode" technology
- Small overall dimensions with a ceiling cut of \varnothing 68 mm make this detector inconspicuous but effective in its application
- Additional switch input for individual manual lighting control
- Extension of the field of detection with parallel connection of max. 8 detectors
- Targeted masking out of areas by means of an enclosed lens mask