


## PD-C 360i/8 DIM

**Item number**      **GTIN**  
 EP10426711      4015120426711



### Technical data

GENERAL	
Device category	Ceiling-mounted presence detector
Product information	Please note the Explanation of circuit breaker in the download area of the product!
Included in delivery	Includes lens mask
User interface	Adjusting controller, IR remote control with "blue mode" technology
Remote controllable	✓
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Flush-mounted/Device socket $\varnothing$ 68 mm
Installation position	Ceiling
Installation dimension	Installation depth: 24 mm, $\varnothing$ 60 mm
Type of connection	Push terminal
Connectable wire cross section	0.75 – 2.5 mm <sup>2</sup>
HOUSING	
Dimensions	Height/Depth 62 mm, $\varnothing$ 108 mm
Weight	141 g
Material	UV-stabilised polycarbonate
Protection type	IP20
Protection type with accessory	IP54 with surface-mounted box (order separately)
Permissible ambient temperature	-25 °C...+50 °C
Relative humidity	5 – 93 %, non-condensing
Colour	white, similar to RAL 9010

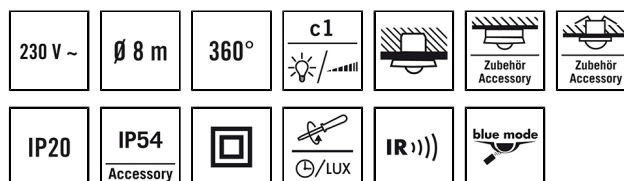

### Product description

- Presence detector with **360° field of detection** for ceiling mounting
- **Range of up to 8 m** in diameter at a recommended installation height of 3 m (maximum mounting height 5 m)
- Automatic light control to a **constant brightness level** depending on presence and natural light (1 - 10 V DC interface)
- 16 A high-performance relay (tungsten pre-contact)
- Default settings ensure immediate operability

### Offers special product features like:

- Presence and daylight dependent constant light control
- Simple parameterisation, remote control and documentation with ESY-Pen and ESY-App

### ELECTRICAL VERSION

Control system	1 – 10 V
Protection class	II
Nominal voltage	230 V ~ / 50 Hz
In-rush current	800 A / 200 $\mu$ s
Power consumption	0.3 W

### SENSORS

Detection angle	360°
Detection range diagonally	$\varnothing$ 8 m
Detection range head-on	$\varnothing$ 6 m
Detection range presence	$\varnothing$ 4 m
Field of detection	up to 50 m <sup>2</sup>
Recommended installation height	3 m
Max. mounting height	5 m
Light measurement	mixed light
Level of brightness	5 – 2000 lx

### CHANNELS (LIGHTING / HVAC)

Number of light channels	1
Push button input lighting	1
Push button input HVAC	–
Slave input	✓
Max. number of slave detectors	10
Mode	Semi-automatic, Fully automatic
Switching delay from "dark to light"	300 s
Switching delay from "light to dark"	30 s
Constant light control	✓
Channel	<b>C1</b> Lighting

## PD-C 360i/8 DIM

<b>Item number</b>	<b>GTIN</b>
EP10426711	4015120426711

Function	Switching, Regulate, Dimming	Push button input	✓
Switching capacity	230 V/50 Hz, 16 AX 2300 W/10 A (cos phi = 1) 1150 VA/5 A (cos phi = 0,5) 600 W LED	Impulse mode	✓
Switch contact	make contact / non-floating	Switch-off delay time	60 s...30 min (adjustable in steps)
		Orientation light	10 % luminous efficiency
		Switch-off delay time, orientation light	60 s...60 min

### Factory settings

GENERAL	
Sensitivity	100 %
Afterglow luminous efficiency	10 %
Orientation light ON	–
Orientation light, depending on brightness	✓
Switching threshold for orientation light	500 lx
Luminous efficiency switch-on value	10 %

CHANNELS (LIGHTING / HVAC)	
Channel	C1 Lighting
Operating mode	fully automatic
Level of brightness/switching threshold	400 lx
Switch-off delay time	5 min
Luminous efficiency of orientation light	10 %
Duration of switch-off warning	300 s

### Accessories

Product designation	Item number	Product description	GTIN
<b>Ceiling-mounted presence detector</b>			
PD-C 360/8 Slave	EP10055379	Slave presence detector for extending the field of detection of a Master presence detector	4015120055379
PD-C 360/24 Slave	EP10055386	Slave presence detector for extending the field of detection of a Master presence detector	4015120055386
PD-C 360/32 Slave	EP10427770	Slave presence detector for extending the field of detection of a Master presence detector	4015120427770
<b>Cover</b>			
COMPACT COVER SET 8 SR	EP10425936	Cover set for COMPACT series, 8 m, consists of cover and design ring, stainless steel appearance, similar to RAL 9006	4015120425936
COMPACT COVER SET 8 BK	EP00007521	Cover set for COMPACT series, 8 m, consists of cover and design ring, black	4015120007521
<b>Electrical accessories</b>			
FILTER 230 V	EP10426988	Filter for suppression of inductive loads, such as relays, contactors, fluorescent lamps and transformers	4015120426988
<b>Mounting</b>			
COMPACT MOUNTING BOX IP20 SM WH	EP10425370	Surface-mounted box for COMPACT series, IP20, white	4015120425370
COMPACT MOUNTING BOX IP20 SM SR	EP10425387	Surface-mounted box for COMPACT series, IP20, silver	4015120425387
COMPACT MOUNTING BOX IP54 SM WH	EP10425905	Surface-mounted box for COMPACT series, IP54, white	4015120425905
COMPACT MOUNTING BOX IP54 SM SR	EP10425912	Surface-mounted box for COMPACT series, IP54, silver	4015120425912
MOUNTING SET IP20 FM 62 WH	EP10425929	Recessed ceiling mounting set includes installation bracket and dust-protected box, 62 mm	4015120425929
COMPACT MOUNTING BOX IP54 SM BK	EP10426940	Surface-mounted box for COMPACT series, IP54, black	4015120426940
COMPACT MOUNTING BOX IP20 SM BK	EP10426933	Surface-mounted box for COMPACT series, IP20, black	4015120426933
COMPACT APC MOUNTING BOX IP20 SM WH	EP10426278	Surface-mounted box IP20 for COMPACT APC DALI-2	4015120426278
<b>Protection</b>			
BASKET GUARD ROUND LARGE	EM10425608	Basket guard for presence and motion detectors and smoke detectors, Ø 180 mm, height 90 mm	4015120425608


## PD-C 360i/8 DIM

Item number	GTIN
EP10426711	4015120426711


### Accessories

Product designation	Item number	Product description	GTIN
<b>Remote control</b>			
ESY-Pen	EP10425356	ESY-Pen and ESY-App, two tools for every task: (1) Parameterisation, (2) remote control, (3) light measurement, (4) project management	4015120425356
REMOTE CONTROL PDi/plus	EM10425530	IR remote control for multi-channel presence detectors of the COMPACT series (DIM, DUOplus, DUO DIM, DUO DIMplus)	4015120425530
REMOTE CONTROL PDi/USER	EM10425547	IR remote control for end users of presence detectors	4015120425547
Mobil-PDi/MDi-universal	EP10433993	Remote control for quick and precise setting of various parameters	4015120433993

### Dimension drawing




### Field of detections



### Detection range

Diagonally (A)	Ø 8 m
Frontal (B)	Ø 6 m
Presence area (C)	Ø 4 m

### Circuit diagram

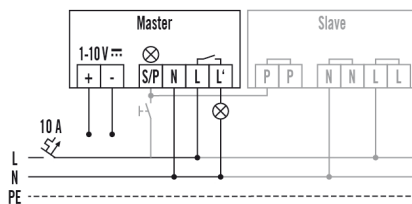

Standard operation with optional control via a closing button and use of max. ten slave devices to one master device.

### Detailed product description

- Presence detector with **360° field of detection** for ceiling mounting
- **Range of up to 8 m** in diameter at a recommended installation height of 3 m (maximum mounting height 5 m)
- Automatic light control (channel 1) to a **constant brightness level** depending on presence and natural light (1 - 10 V DC interface)

## PD-C 360i/8 DIM

Item number	GTIN
EP10426711	4015120426711

- 16 A high-performance relay (tungsten pre-contact), ideal for switching capacitive loads such as electronic ballasts, parallel-compensated fluorescent lamps, compact fluorescent lamps, energy saving lamps
- Default settings ensure immediate operability
- Simple programming using remote control with "blue mode" technology or setting elements
- Integrated toggle for setting with remote control or by adjusting controller - prevents operating errors and provides tamper protection
- Masking of interference sources by reducing sensitivity using DIP switches
- Additional switch input with toggle function "room = ON + OFF/hallway = ON"
- Detector can be used as a fully automatic or semi-automatic device
- Lowering of the luminous efficiency to 10 % after expiration of the time setting for use as an orientation light for hallways and passageways
- In-built switch-off warning
- Flush-mounted device as standard
- Surface mounting or recessed ceiling mounting with accessories
- Easily replaceable/paintable cover and design ring (available in "silver" as an accessory)
- Field of detection can be extended by connecting slave devices
- Targeted masking out of areas by means of an enclosed lens mask