

ACTUATOR FULL AUTO C3 DALI

Item number GTIN
EP10427473 4015120427473

230 V ~

IP20



DALI

Product description

- Fully automatic or semi-automatic actuator device for channel 3
- Key input for manual control
- Potential-free relay with 10-A switching capacity



Technical data

GENERAL	
Device category	Electrical accessories
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	3 years
ATTACHMENT	
Installation type	Recessed mounting
Installation position	Box
Installation dimension	Installation length: 45 mm x Installation width: 45 mm x Installation depth: 25 mm, Ø 68 mm
Type of connection	Push terminal
Connectable wire cross section	0.75 – 2.5 mm²
HOUSING	
Dimensions	Length 45 mm x Width 45 mm x Height/Depth 24 mm
Weight	30.866 g
Material	UV-stabilised polycarbonate

Protection type	IP20
Permissible ambient temperature	0 °C...+50 °C
Relative humidity	5 – 93 %, non-condensing
Colour	white, similar to RAL 9010

ELECTRICAL VERSION	
Control system	DALI
Protection class	II
Nominal voltage	13 – 22.4 V
Power consumption	0.2 W

AUTOMATION	
Bus voltage	9,5 - 22,5 V DC
Number of inputs	1
Rated current (cos # = 0.8)	max. 10 A
DC switching capacity (resistive load)	10 A / 12 V DC
Switching capacity incandescent lamps	2300 W

Factory settings

Channel	C1
Operating mode	fully automatic

Switch-off delay time	30 min
-----------------------	--------

DATA SHEET

ACTUATOR FULL AUTO C3 DALI


Item number

GTIN


EP10427473

4015120427473

Dimension drawing



Circuit diagram

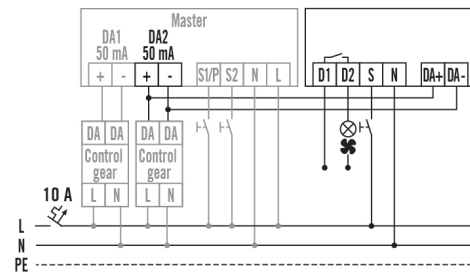

Standard operation.

Detailed product description

- Factory setting: fully automatic
- Fully automatic or semi-automatic actuator device for channel 3
- Key input for manual control
- Simple programming using remote control with "blue mode" technology
- 4 h ON/OFF adjustable via universal remote control
- Manual override possible (ON/OFF) via universal remote control
- Switch-off delay time - 1 min. to 120 min.
- Potential-free relay with 10-A switching capacity