



### Features

- Integrated LED recessed spotlight, vertical tilt 30°, 420lm, 5.5W, phase dimmable trailing/leading edge, 3000K, 38° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, clear lens. Additional silver bezel included in the packaging.


### Product Overview

<b>Product name</b>	START ECO SPOT 420lm 830 IP44 DIM WHT
<b>Technology</b>	LED
<b>Housing</b>	PC Polycarbonate
<b>Mount</b>	Ceiling recessed mounting
<b>Environment</b>	Indoor
<b>General application</b>	Residential & Consumer
<b>ETIM Class</b>	EC001744
<b>Fixture luminous flux (lm)</b>	420
<b>Luminaire efficacy (lm/W)</b>	76
<b>Colour temperature (K)</b>	3000
<b>Light colour</b>	Warm White
<b>CRI (Ra)</b>	80
<b>Colour Variation Initial (SDCM)</b>	6
<b>Beam Angle (°)</b>	38
<b>Photobiological Risk Group</b>	RG0
<b>Total power consumption (W)</b>	5.5
<b>Electrical protection</b>	Class II
<b>Dimmable</b>	Yes
<b>Minimum dimming level (%)</b>	10
<b>LED Flickering Rate</b>	Medium (21% - 40%)

## START ECO SPOT 420lm 830 IP44 DIM WHT 0005376

Housing colour	White
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288053769
Warranty	3 years
Colour Code	830
Dimming method	Mains: leading / trailing edge

### Photometry

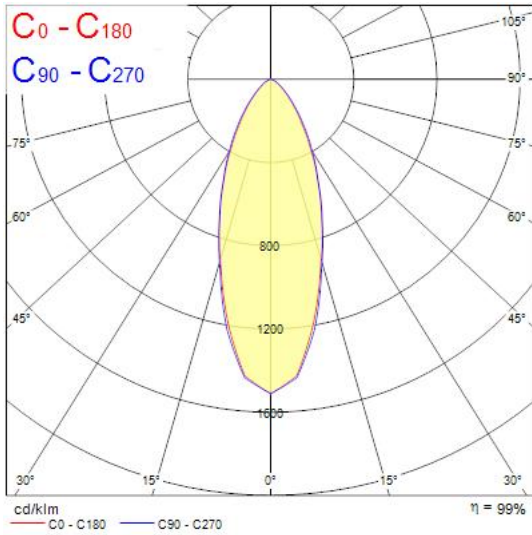

### Technical drawings

