



Filament

- Classic light bulb shape ensures an easy replacement
- Instant 100% light when switched on and no startup time
- No UV / IR radiance so there is less risk of damage



Specifications


Item Code	Item Description	Equivalent to (W)	Power (W)	Lumen	Efficacy (lm/W)	CCT (K)	Weight (kg/pc)
A60, Dimmable (Triac)							
500010000400	LED-E-A60-FILA-E27-7W-DIM-4000K-FR	GLS 60W	7	806	115	4000	0.04

Packaging Information


Item			Box			
Item Code	Item Description	EU HS Code	Dimensions (mm) (LxWxH)	Gross Weight (kg)	EAN	pc/box
500010000400	LED-E-A60-FILA-E27-7W-DIM-4000K-FR	85395200	128x68x68	0.08	6945730433176	1
821017001200	LEDsmart-BLE-Relay-250W-DIM	94059200	90x40x30	0.08	6941408898469	1
821017003600	LEDsmart-BLE2-Relay-250W-DIM	94059200	90x40x30	0.09	6931783007594	1

Technical Specifications		Electrical Supply	
Lifetime (L70)	15,000 h	Frequency	50/60 Hz
On-/Off-cycles	100,000	Nominal voltage	220-240 V
Dimmability	Triac	DC input voltage	No
Beam angle	360°	Ambient Conditions	
Finishing	Frosted	Operating temperature	-20~+40°C
Colour rendering index (CRI)	≥ 80	Application temperature	+25°C
		Storage environment	-25~+50°C

3 YEARS WARRANTY

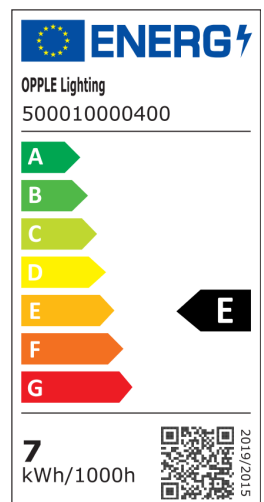

Dimensional Drawing (mm)

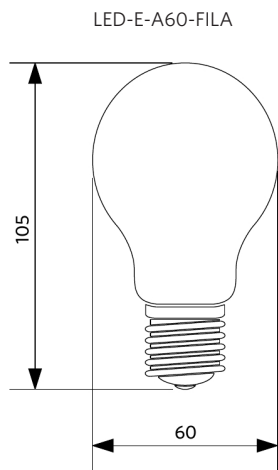

Photometric Data

