



Reflector EcoMax GU10

- Full retrofit of existing halogen GU10 lamps
- Light silver coloured
- No UV/IR radiation
- Significantly lower heat output than halogen, avoiding discolouration and risk of damaging goods

## Specifications

| Item Code        | Item Description              | Equivalent to (W) | Power (W) | Lumen | Efficacy (lm/W) | CCT (K) | Weight (kg/pc) |
|------------------|-------------------------------|-------------------|-----------|-------|-----------------|---------|----------------|
| Dimmable (Triac) |                               |                   |           |       |                 |         |                |
| 140060952        | LED-E-GU10-3,5W-4000K-36D-DIM | Halogen 35W       | 3.5       | 260   | 74              | 4000    | 0.03           |

## Packaging Information

| Item         |                               |            | Box                     |                   |               |        |
|--------------|-------------------------------|------------|-------------------------|-------------------|---------------|--------|
| Item Code    | Item Description              | EU HS Code | Dimensions (mm) (LxWxH) | Gross Weight (kg) | EAN           | pc/box |
| 140060952    | LED-E-GU10-3,5W-4000K-36D-DIM | 85395200   | 52x52x62                | 0.06              | 6945730493941 | 1      |
| 821017001200 | LEDsmart-BLE-Relay-250W-DIM   | 94059200   | 90x40x30                | 0.08              | 6941408898469 | 1      |
| 821017003600 | LEDsmart-BLE2-Relay-250W-DIM  | 94059200   | 90x40x30                | 0.09              | 6931783007594 | 1      |

### Technical Specifications


|                              |          |
|------------------------------|----------|
| Lifetime (L70)               | 15,000 h |
| On-/Off-cycles               | 50,000   |
| Dimmability                  | Triac    |
| Beam angle                   | 36°      |
| Finishing                    | Silver   |
| Colour rendering index (CRI) | ≥ 80     |

### Electrical Supply

|                  |           |
|------------------|-----------|
| Frequency        | 50/60 Hz  |
| Nominal voltage  | 220-240 V |
| DC input voltage | No        |


### Ambient Conditions

|                         |           |
|-------------------------|-----------|
| Operating temperature   | -20-+40°C |
| Application temperature | +25°C     |
| Storage environment     | -25-+50°C |

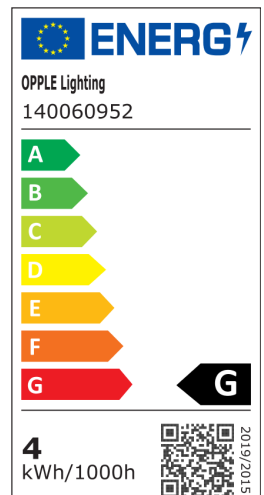

## Dimensional Drawing (mm)

LED-E-GU10-3,5W

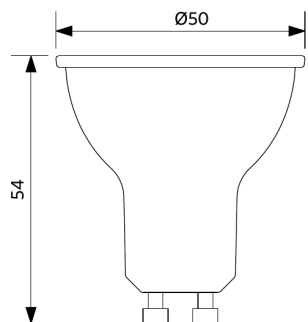

## Photometric Data

