

Features

- Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 800lm, 100lm/W, 4000K, shallow recessed depth of 55mm.


Product Overview

Product name	INSAVER 150 HE TOPPER LED NW PIR
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4271109
E-number SE	7467414
Fixture luminous flux (lm)	800
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	5
Beam Angle (°)	64
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast

INSAVER 150 HE TOPPER LED NW PIR 3033921

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971339212
Warranty	3 years
Dimming method	N/A

Photometry

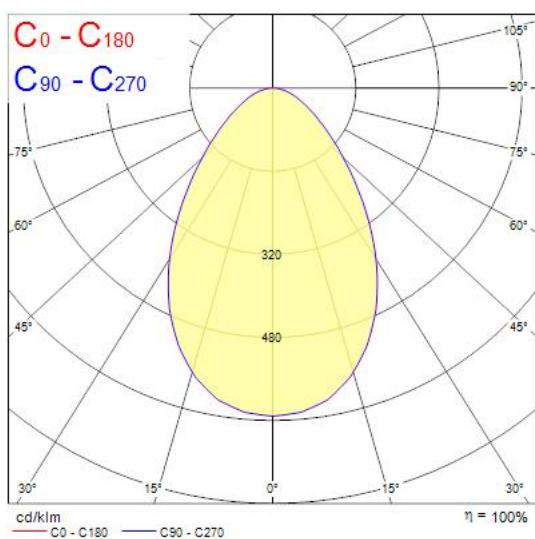

Technical drawings

