


## PHV1P 6 12 (759 706)

- Easy transport due to detachable insulating stick

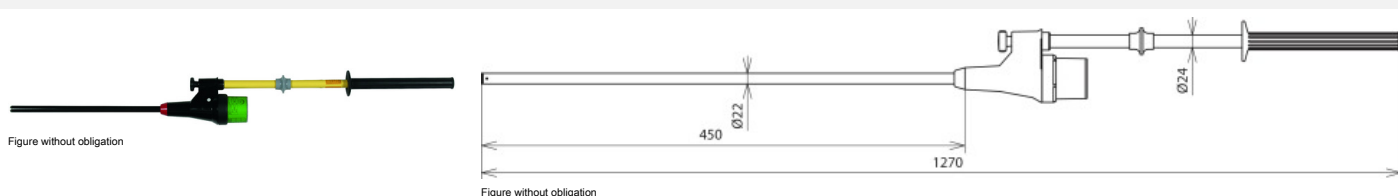

| Type                              | PHV1P 6 12                             |
|-----------------------------------|--|
| Part No.                          | 759 706                                |
| Nominal voltage (U <sub>N</sub> ) | 6 ... 12 kV                            |
| Type of voltage                   | a.c.                                   |
| Frequency                         | 50 Hz                                  |
| Total length (l <sub>o</sub> )    | 1270 mm                                |
| Insertion depth (l <sub>i</sub> ) | 450 mm                                 |
| Standard                          | EN/IEC 61481-1 (DIN VDE 0682-431-1)    |
| Temperature range                 | -25 °C ... +55 °C, climatic category N |
| Design                            | Straight                               |
| For use at                        | ▲                                      |
| For                               | Indoor and outdoor installations       |
| Design                            | Single-pole                            |
| Indication                        | Visual                                 |
| Self-testing element              | Yes                                    |
| Battery                           | Lithium AA 1.5 Volt                    |
| Material (test prod)              | Plastic                                |
| Material (indicator)              | Plastic, fully insulated               |
| Material (insulating stick)       | Glass-fibre reinforced polyester tube  |
| Weight                            | 1,24 kg                                |
| Customs tariff number             | 90303370                               |
| GTIN                              | 4013364259232                          |
| PU                                | 1 Stk                                  |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.