


CL - series

Hose clamps 2-parts with loose guides, similar to DIN 20039 A

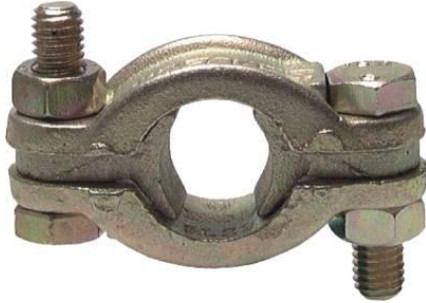

Reference	Material	Range (mm)	Weight (g)
CL-22	Malleable cast iron	17 - 22	95
CL-29	Malleable cast iron	22 - 29	140
CL-34	Malleable cast iron	28 - 34	135
CL-40	Malleable cast iron	32 - 40	210
CL-49	Malleable cast iron	39 - 49	300
CL-60	Malleable cast iron	48 - 60	360
CL-72	Malleable cast iron	56 - 72	370
CL-76	Malleable cast iron	60 - 76	430
CL-94	Malleable cast iron	77 - 94	600
CL-101	Malleable cast iron	89 - 101	850
CL-115	Malleable cast iron	94 - 115	750
CL-127	Malleable cast iron	113 - 127	900
CL-140	Malleable cast iron	130 - 140	1000
CL-145	Malleable cast iron	115 - 145	950
CL-155	Malleable cast iron	135 - 155	1200
CL-175	Malleable cast iron	155 - 175	1200
CL-195	Malleable cast iron	175 - 195	1500
CL-225	Malleable cast iron	210 - 225	2200
CL-250	Malleable cast iron	227 - 250	2500
CL-26-S	Stainless steel	18 - 26	135
CL-33-S	Stainless steel	26 - 33	145
CL-40-S	Stainless steel	32 - 40	210

ENGLISH

Materials:

Malleable cast iron, zinc plated

Advantages:

High clamping strength - even hose clamping from all sides from the laterally free tongues.

NEDERLANDS

Materialen

Buigzaam verzinkt

Voordelen:

Grote spankracht - uniforme klemming van de slang aan alle zijden door zijdelingse losse tongen.

DEUTSCH

Werkstoffe:

Temperguss verzinkt

Vorteile:

Große Spannkraft - gleichmäßige Einspannung des Schlauches von allen Seiten durch seitlich lose Zungen.

FRANÇAIS

Matériaux:

Fonte malléable zinguée

Avantages:

Grande force de serrage - bridage uniforme du tuyau de tous les côtés grâce aux lames libres latéralement.