


FL2S-FM-O - series

Straight ORFS screwed connections with union nut (G thread), ORFS

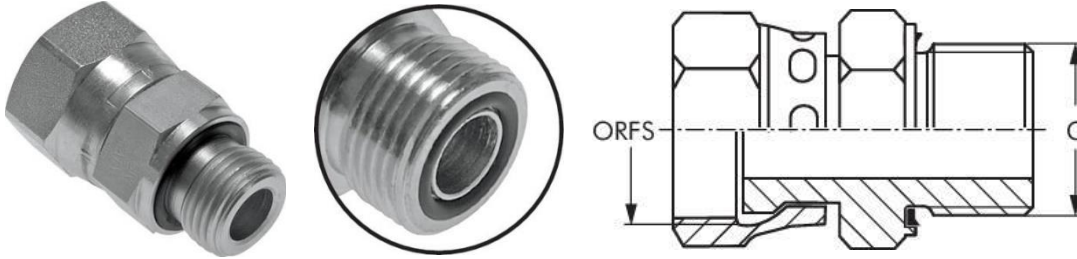

Reference	Material	Surface protection	Nominal inner diameter of connection 1	Nominal outer diameter of connection 2 *	Max pressure (bar)
FL2S-FM-EZE-011U-014G-O	Steel	Zinc plated	UN 11/16 inch-16	G 1/4	630
FL2S-FM-EZE-013U-038G-O	Steel	Zinc plated	UN 13/16 inch-16	G 3/8	630
FL2S-FM-EZE-100U-012G-O	Steel	Zinc plated	UNS 1 inch-14	G 1/2	400
FL2S-FM-EZE-103U-034G-O	Steel	Zinc plated	UN 1-3/16 inch-12	G 3/4	400
FL2S-FM-EZE-107U-100G-O	Steel	Zinc plated	UN 1-7/16 inch-12	G 1	400
FL2S-FM-EZE-111U-114G-O	Steel	Zinc plated	UN 1-11/16 inch-12	G 1 1/4	250
FL2S-FM-EZE-200U-112G-O	Steel	Zinc plated	UN 2inch-12	G 1 1/2	250

* - with an elastomer seal