


# FL2S-M-O - series

Straight ORFS screw connections, ORFS

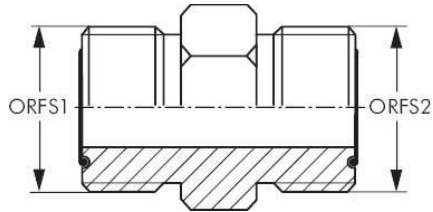

Reference	Material	Surface protection	Nominal outer diameter of connection 1	Nominal outer diameter of connection 2	Max pressure (bar)
FL2S-M-EZ-009U-O	Steel	Zinc plated	UNF 9/16inch-18	UNF 9/16inch-18	630
FL2S-M-EZ-011U-009U-O	Steel	Zinc plated	UN 11/16inch-16	UNF 9/16inch-18	630
FL2S-M-EZ-011U-O	Steel	Zinc plated	UN 11/16inch-16	UN 11/16inch-16	630
FL2S-M-EZ-013U-011U-O	Steel	Zinc plated	UN 13/16inch-16	UN 11/16inch-16	630
FL2S-M-EZ-013U-O	Steel	Zinc plated	UN 13/16inch-16	UN 13/16inch-16	630
FL2S-M-EZ-100U-013U-O	Steel	Zinc plated	UNS 1inch-14	UN 13/16inch-16	400
FL2S-M-EZ-100U-O	Steel	Zinc plated	UNS 1inch-14	UNS 1inch-14	400
FL2S-M-EZ-103U-100U-O	Steel	Zinc plated	UN 1-3/16inch-12	UNS 1inch-14	400
FL2S-M-EZ-103U-O	Steel	Zinc plated	UN 1-3/16inch-12	UN 1-3/16inch-12	400
FL2S-M-EZ-107U-103U-O	Steel	Zinc plated	UN 1-7/16inch-12	UN 1-3/16inch-12	400
FL2S-M-EZ-107U-O	Steel	Zinc plated	UN 1-7/16inch-12	UN 1-7/16inch-12	400
FL2S-M-EZ-111U-107U-O	Steel	Zinc plated	UN 1-11/16inch-12	UN 1-7/16inch-12	250
FL2S-M-EZ-111U-O	Steel	Zinc plated	UN 1-11/16inch-12	UN 1-11/16inch-12	250
FL2S-M-EZ-200U-O	Steel	Zinc plated	UN 2inch-12	UN 2inch-12	250