
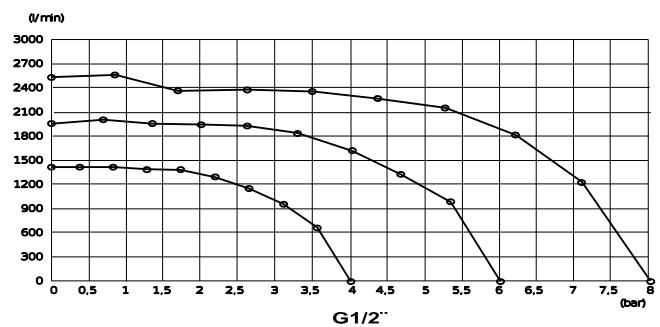
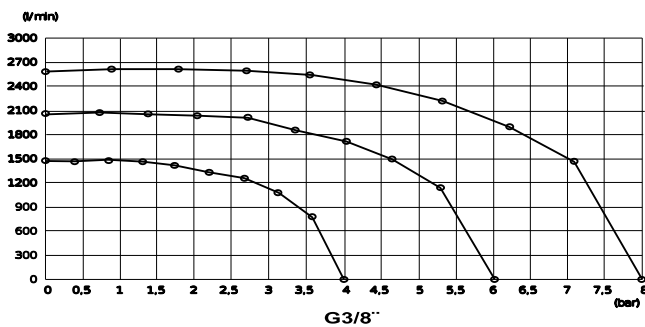
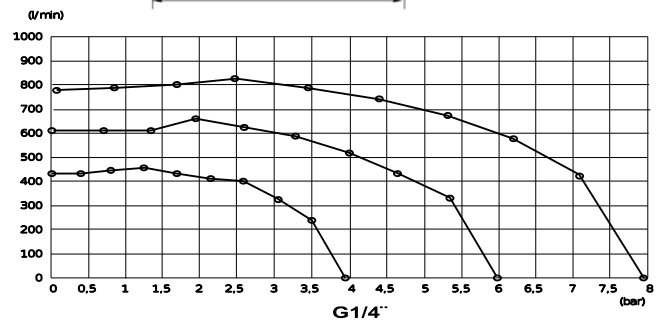
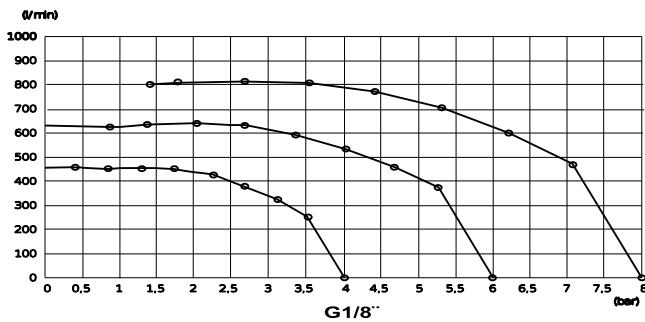


## NLBN series

Needle shut-off valves with bulkhead thread for panel mounting, PN 18

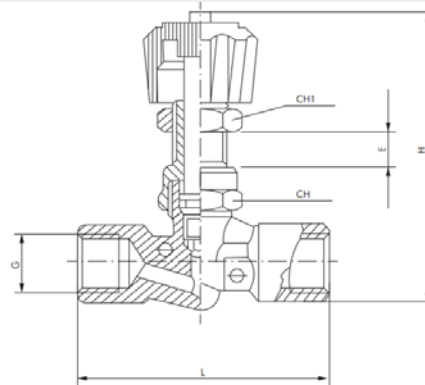

Reference	G	DN(mm)	L(mm)	H(mm)	Emax	CH	CH1	PN (bar)	Weight (g)
NLBN-018	G1/8"	4	51.6	64	0.48	19	17	18	95
NLBN-014	G1/4"	4	57	64	0.69	19	17	18	105
NLBN-038	G3/8"	8	63	90	0.81	21	17	18	175
NLBN-012	G1/2"	8	69	90	1.08	21	17	18	195

### ENGLISH

#### Materials:

Housing: nickel-plated brass, nickel-plated steel, seal: NBR

#### Temperature range:

-10°C to max. +80°C

#### Application:

- Needle Valves for Switchboards  
- For Gases and Fluids

#### Switch panel mounting:

for borehole diameter Ø 14.5 mm

Commodity Code: 84812090

### NEDERLANDS

#### Materialen

Behuizing: Vernikkeld messing, vernikkeld staal, afdichting: NBR

#### Temperatuurbereik:

-10 °C tot max. +80 °C

#### Application:

- Voor schotmontage  
- Voor gassen en vloeistoffen

#### Schalttafeleinbau:

voor boringdiameter Ø 14,5 mm

HS Code: 84812090

### DEUTSCH

#### Werkstoffe

Gehäuse: Messing vernikkelt, Stahl vernikkelt, Dichtung: NBR

#### Temperaturbereich:

-10°C bis max. +80°C

#### Einsatzbereich:

- Nadel Absperrventil für Schalttafeleinbau  
- Für Gase und Flüssigkeiten

#### Schalttafeleinbau:

für Bohrungsdurchmesser Ø 14,5 mm

Zollwarennummer: 84812090

### FRANÇAIS

#### Matériaux

Boîtier: laiton nickelé, acier nickelé, joint: NBR

#### Plage de température:

-10°C à +80°C max

#### Domaine d'utilisation:

- Valve d'arrêt à aiguilles pour montage sur tableau de commande  
- Pour gaz et fluides

#### Montage du tableau de commande:

pour un diamètre de perçage Ø 14,5 mm

Numéro des marchandises en douane: 84812090