


### OKS 475 High-Performance Grease

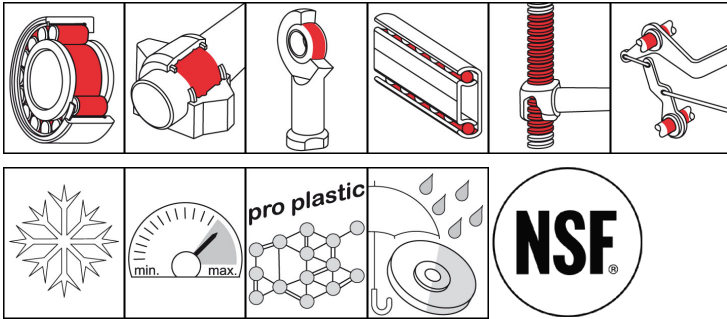

#### Description

Fully synthetic high-performance grease with PTFE for use at low temperatures and high speeds.

#### Applications

- Grease lubrication of plain and roller bearings with low bearing play as well as bearings with low coasting moments
- Lubrication for fast-running roller bearings
- Sealing lubrication of mating surfaces, for example ground-in parts such as taper plugs, dosing plungers and valves
- Maintenance lubrication of plastic and rubber parts with embrittlement protection and good frictional characteristics, particularly on metal surfaces

#### Advantages and benefits

- Temperature range from -60°C to 120°C
- Resistant to all alkali and acid cleaning agents and disinfectants
- Good wear protection through PTFE
- NSF H2 registration

#### Branches

- Paper and packaging industry
- Iron and steel industry
- Glass and foundry industry
- Rail vehicle technology
- Logistics
- Municipal services
- Rubber and plastic processing
- Chemical industry
- Plant and machine (tool) engineering
- Shipbuilding and marine technology



## PRODUCT INFORMATION

# OKS 475

## High-Performance Grease

### Application tips

Clean the lubricating points well for optimal effect. Before filling for first time, remove anti-corrosion agent. Fill the bearing such that all functional surfaces are certain of being greased. Fill normal bearings up to about 1/3 of the free space inside the bearing, high-speed bearings (DN value < 400,000) up to about 1/4. Low-speed bearings (DN value > 50,000) and their housings should be filled completely. In as far as available, the bearing and machine manufacturer's instructions should be observed. Subsequent lubrication at the lubrication nipples by grease gun or by automatic lubrication system. Assess the lubrication frequency and quantity on the basis of the service conditions. If old grease cannot be removed, restrict the quantity of grease so as to avoid over-lubricating the bearing. If lubrication frequencies tend to be low, you should aim for a full grease change. Caution: Only mix with suitable lubricants.

### Packaging

- 400 ml Cartridge
- 1 kg Can
- 5 kg Hobbock
- 25 kg Hobbock
- 170 kg Drum

### Technical Data

	Standard	Conditions	Unit	Value
<b>Main components</b>				
base oil				polyalphaolefine
thickener				lithium hydroxystearate
solid lubricants				PTFE
<b>Application related technical data</b>				
marking	DIN 51 502	DIN 51 825		KFHC2K-60
viscosity at (40°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	approx. 30
viscosity at (100°C)	DIN 51 562-1	base oil	mm <sup>2</sup> /s	approx. 11.5
drop point	DIN ISO 2176		°C	> 185
consistency	DIN 51 818	DIN ISO 2137	NLGI grade	2
worked penetration	DIN ISO 2137	60DH	0.1 mm	265-295
flow pressure	DIN 51 805	20°C	mbar	< 125
oil separation		30h/100°C	percent in weight	< 5
resistance to oxidation	DIN 51 808	100h/100°C	bar	< 0.2
lower operating temperature	DIN 51 805	≤ 1400hPa	°C	-60
upper operating temperature	DIN 51 821-2	F50 (A/1500/6000), 100h	°C	120
colour				beige
density (at 20°C)	DIN EN ISO 3838		g/cm <sup>3</sup>	0.85
water resistance	DIN 51 807-1	3h/90°C	Degree 0-3	1
DN value (dm x n)			mm/min	1,000,000
four-ball test rig welding load	DIN 51 350-4		N	2,000
SKF-EMCOR	DIN 51 802	7 days, distilled water	corr. degree	≤ 1
<b>Properties and approvals</b>				
approval for food processing technology				NSF H2, Reg.-Nr. 137708



### **OKS 475**

### **High-Performance Grease**

---

#### **OKS Spezialschmierstoffe GmbH**

Ganghoferstraße 47  
82216 Maisach  
Phone: +49 (0) 8142 3051 - 500  
info@oks-germany.com  
**www.oks-germany.com**



The information in this publication reflects state-of-the-art technology, as well as extensive testing and experience. Due to the diversity of possible applications and technical realities, they can only serve as recommendations and are not arbitrarily transferable. Therefore, no obligations, liability or warranty claims can be derived from them. We only accept liability for the suitability of our products for particular purposes, and for certain properties of our products, in the event that we have accepted such liability in writing in the individual case. Any case of justified warranty claims shall be limited to the delivery of replacement goods free of defects, in the event that this subsequent improvement fails, to reimbursement of the purchase price. Any and all further claims, in particular the liability for consequential injuries or damage, shall always be excluded. Prior to use, the customer must conduct its own testing to prove suitability. The data are subject to change for the sake of progress. ® = Registered trademark

**Safety data sheet** for industrial and commercial users is available for downloading under [www.oks-germany.com](http://www.oks-germany.com). Our Customer and Technical service will be pleased to help should you have any further questions.