




EE805A

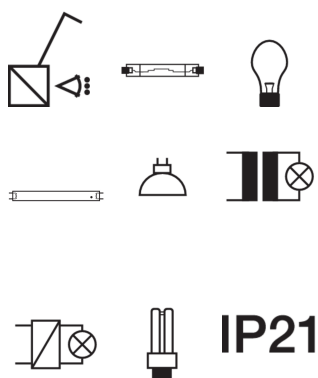

Movement detector 360° flush mounted with normally open contact

Technical characteristics

Functions

Function can only be used as individual unit

Main electrical features

Rated operational voltage Ue 230 V

Frequency 50/60 Hz

Dimensions

Height of installed product 15,5 mm

Width of installed product 19 mm

Power

Halogen switching capacity 230V 0 / 2300 W

Max. power with fluo uncompensated lamps 1000 VA

Incandescent bulb power 0 / 2300 W

Capacity

Breaking capacity 10A 230V AC1

Power supply

Supply voltage 230 V +10% / -15%

Materials

Colour white

Lighting control

Brightness measurement range 5 / 1000 Lux

Installation, mounting

Mounting type flush-mounted

Maximum Mounting Height 4 m

Connection

Type of contacts Normally open contact (NO)

Type of connection with plug-in terminals

Settings

Setting with potentiometers for setting the response brightness and delay time

Scope of delivery

Component with fitting material

Safety

Protection class isol.class II

Use conditions

Operating temperature -5...45 °C

Identification

Application, usage Motion detector