

Start Spot Aluminium IP44


START SPOT ALUMINIUM 800LM 840 IP44 WHT

0005171



Product features

- Integrated LED recessed spotlight, vertical tilt 30°, white bezel colour, white replaceable reflector, 800lm (white reflector), 760lm (black reflector), 9.0W, dimmable trailing/leading edge, 4000K, 40° degree beam angle, polycarbonate and aluminium body, low profile 62mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, weight 0,165Kg, 85mm bezel diameter, 68-72mm cutout, clear lens. Additional black reflector included in the packaging.

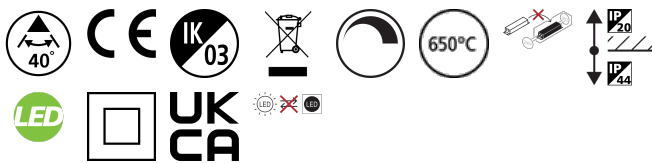


PRODUCT OVERVIEW

Product name	START SPOT ALUMINIUM 800LM 840 IP44 WHT
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278137
Warranty	3 years
Fixture luminous flux (lm)	800
Luminaire efficacy (lm/W)	89
Colour temperature (K)	4000
Colour Code	840
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	9
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	10
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288051710
Dimming method	Mains: leading / trailing edge

PHOTOMETRY

Start Spot Aluminium IP44 *START SPOT ALUMINIUM 800LM 840 IP44 WHT* 0005171

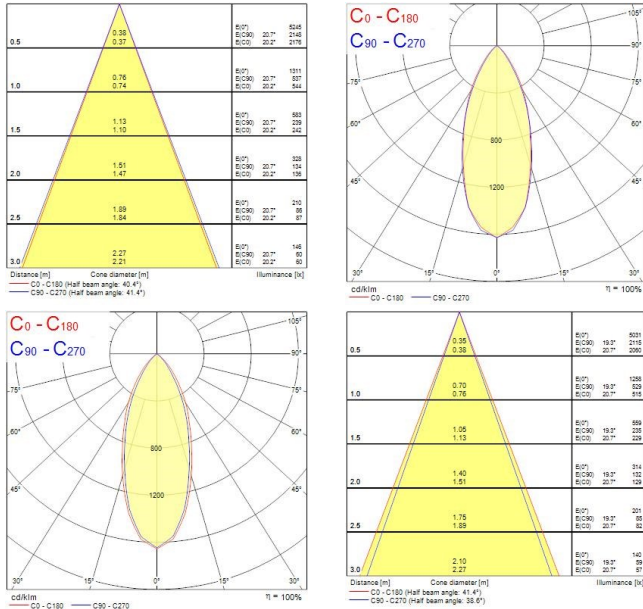

TECHNICAL DRAWINGS

