

Start Spot IP44

START ECO SPOT 420lm 830 IP44 WHT

0005370



Product features

- Integrated LED recessed spotlight, vertical tilt 30°, 420lm, 5.0W, non-dimmable, 3000K, 38° degree beam angle, polycarbonate white body, low profile 47mm recessed depth, IP44 from the front, IK03, loop-in/loop-out terminals for fast wiring, 86mm bezel diameter, 68-74mm cutout, clear lens. Additional silver bezel included in the packaging.




PRODUCT OVERVIEW

Product name	START ECO SPOT 420lm 830 IP44 WHT
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4278142
Warranty	3 years
Fixture luminous flux (lm)	420
Luminaire efficacy (lm/W)	84
Colour temperature (K)	3000
Colour Code	830
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	38
Photobiological Risk Group	RG0
Total power consumption (W)	5
Electrical protection	Class II
Dimmable	No
Minimum dimming level (%)	10
LED Flickering Rate	Medium (21% - 40%)
Housing colour	White
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288053707
Dimming method	N/A

PHOTOMETRY

Start Spot IP44 *START ECO SPOT 420lm 830 IP44 WHT* 0005370

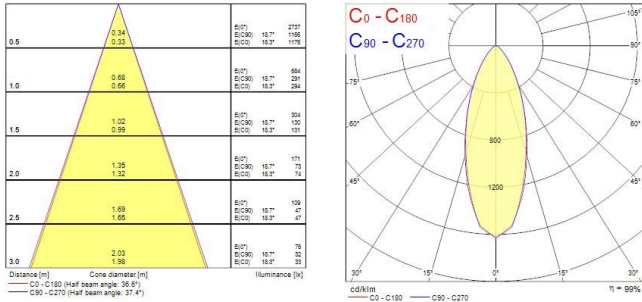

TECHNICAL DRAWINGS

