

INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 1060-2230lm 840

0030389

Product features



- Ceiling recessed LED downlight. With the help of DIP Switch multiple lumen outputs can be set up in 6 steps (7.7W 1060lm, 9.2W 1270lm, 11.6W 1600lm, 13W 1760lm, 15.5W 2050m, 17W 2230lm). Die-cast aluminium body, loop in loop out connector for quick installation, Non dimmable LED driver ; 4000K; UGR <19 with shallow product depth 60mm.













PRODUCT OVERVIEW

Product name	Insaver Slim U19 IP44 225 Multipower 1060-2230lm 840
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Office, Retail
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	2230
Luminaire efficacy (lm/W)	131
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	60
Glare control	< 19
Photobiological Risk Group	RG1
Total power consumption (W)	17
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Low (6% - 20%)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303895
Dimming method	N/A

PHOTOMETRY


INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 1060-2230lm 840 0030389



INSAVER SLIM 205/225 MULTIPOWER

Insaver Slim U19 IP44 225 Multipower 1060-2230lm 840
0030389

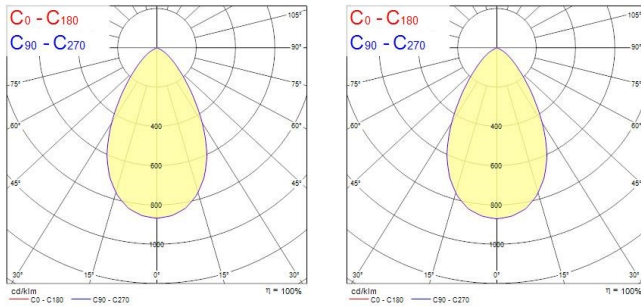

TECHNICAL DRAWINGS

