

Insaver HE Topper LED 150 PIR


INSAVER 150 HE TOPPER LED WW PIR PLUS3

3033924



Product features

- Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm. Wieland GST compatible.

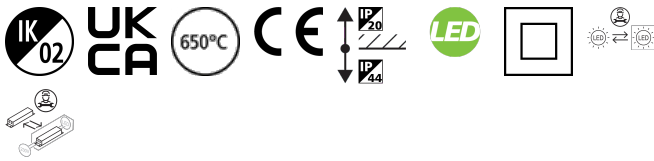

PRODUCT OVERVIEW

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	64
Total power consumption (W)	8
Electrical protection	Class II
Control gear type	Electronic ballast
Housing colour	White
IP rating	IP44/20
IK rating	IK02
Product EAN number	8711971339243
Dimming method	N/A

DATA TABLE

General data

Product name	INSAVER 150 HE TOPPER LED WW PIR PLUS3
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	External

Insaver HE Topper LED 150 PIR

INSAVER 150 HE TOPPER LED WW PIR PLUS3
3033924

General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
Warranty	3 years

Optical data

Fixture luminous flux (lm)	740
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	64

Electrical data

Total power consumption (W)	8
Mains voltage (V)	220-240V
Electrical protection	Class II
Control gear type	Electronic ballast
Transformer required	Yes
Drive current (mA)	350
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	E

Physical data

Housing colour	White
IP rating	IP44/20
IK rating	IK02
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	Other
Nominal Product Length (mm)	165
Nominal Product Width (mm)	165
Nominal Product Height (mm)	55
Nominal Product Diameter (mm)	165
Cutout Dimensions (W x L in mm or Diameter in mm)	145 x 145
Weight (kg)	0.7

Packaging

Single packaging type	Carton
Product EAN number	8711971339243
Packaging single length / height (cm)	25.0
Packaging single width (cm)	17.0
Packaging single depth (cm)	14.0
DUN14 (outer)	18711971339240
Units per outer package	12
Packaging outer length / height (cm)	78.0
Packaging outer width (cm)	36.0

Insaver HE Topper LED 150 PIR INSAVER 150 HE TOPPER LED WW PIR PLUS3 3033924

Packaging outer depth (cm)


31.0

PHOTOMETRY

0.5	0.71	E(0°) E(C0)	35.4°	1939 526
1.0	1.42	E(0°) E(C0)	35.4°	485 132
1.5	2.13	E(0°) E(C0)	35.4°	219 58
2.0	2.84	E(0°) E(C0)	35.4°	121 33
2.5	3.55	E(0°) E(C0)	35.4°	78 21
3.0	4.26	E(0°) E(C0)	35.4°	54 15

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 70.8°)

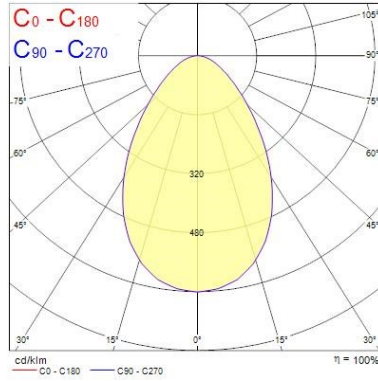

TECHNICAL DRAWINGS

