


Insaver HE Topper LED 150 PIR

INSAVER 150 HE TOPPER LED WW PIR
3033920



Product features

- Insaver HE Topper is a ceiling recessed LED downlight with integrated PIR sensor with time (up to 8 mins) and daylight lux level settings. Die-cast aluminium body, Non dimmable LED driver, 8W, 740lm, 93lm/W, 3000K, shallow recessed depth of 55mm.

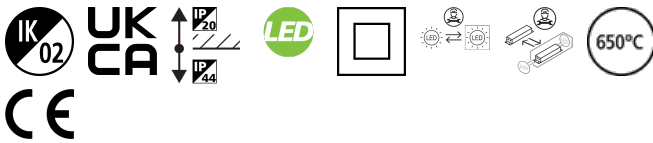


PRODUCT OVERVIEW

| | |
|---------------------------------|---|
| Product name | INSAVER 150 HE TOPPER LED WW PIR |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | External |
| General application | Hospitality, Logistics & Industry, Office |
| ETIM Class | EC001744 |
| E-number FI | 4271108 |
| E-number SE | 7467400 |
| Warranty | 3 years |
| Fixture luminous flux (lm) | 740 |
| Luminaire efficacy (lm/W) | 93 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM5 |
| Beam Angle (°) | 64 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 8 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Housing colour | White |
| IP rating | IP44/20 |
| IK rating | IK02 |
| Product EAN number | 8711971339205 |
| Dimming method | N/A |

PHOTOMETRY

Insaver HE Topper LED 150 PIR

INSAVER 150 HE TOPPER LED WW PIR
3033920



| | | | | |
|-----|------|----------------|-------|------------|
| 0.5 | 0.71 | E(0°) E(C0) | 35.4° | 939 526 |
| 1.0 | 1.42 | E(0°) E(C0) | 35.4° | 480 312 |
| 1.5 | 2.13 | E(0°) E(C0) | 35.4° | 216 98 |
| 2.0 | 2.84 | E(0°) E(C0) | 35.4° | 121 53 |
| 2.5 | 3.55 | E(0°) E(C0) | 35.4° | 79 27 |
| 3.0 | 4.26 | E(0°) E(C0) | 35.4° | 54 19 |

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 70.8°)

TECHNICAL DRAWINGS

