Hose nipple with tube end

Zinc plated steel, low-pressure hose

Series: S-3677

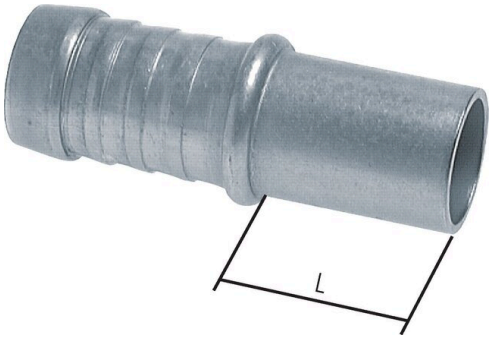

Overview

Material	Zinc plated steel
DN (mm)	2 to 20
Pipe diameter (outer) (mm)	4 to 30
L (mm)	23 to 36
Series	light model series, heavy model series
Hose diameter (inner) (mm)	9 options, see the model table
SKUs in this series	16

Description

Hose nipples with a tube end for low-pressure hose. The tube end goes into a tube fitting for the same tube outer diameter. Choose the hose nipple by the inner diameter of the hose. Secure the hose on the nipple with a hose sleeve or a hose clamp. Both are sold separately. Zinc plated steel. For low-pressure hose only. For hydraulic hose, use crimp fittings.

Key features

- Zinc plated steel

Models

Select the SKU for your application.

SKU	Series	DN (mm)	Hose diameter (inner) (mm)	Pipe diameter (outer) (mm)	L (mm)
F2XWP	heavy model series	4	5 to 6	8	23
F2XWQ	heavy model series	6	7 to 8	10	24
F2XWR	heavy model series	8	9 to 10	12	25
F2XWS	heavy model series	13	14 to 15	16	30
F2XWT	heavy model series	20	21 to 22	25	34
F2XWU	heavy model series	20	21 to 22	30	36
F2XVS	light model series	2	3 to 4	4	30
F2XVT	light model series	3	4 to 5	5	30
F2XVU	light model series	4	5 to 6	6	30
F2XVV	light model series	6	7 to 8	8	30
F2XVW	light model series	8	9 to 10	10	30
F2XVX	light model series	10	11 to 12	12	30
F2XVY	light model series	13	14 to 15	15	30
F2XVZ	light model series	16	17 to 18	18	30
F2XW2	light model series	20	21 to 22	22	30
F2XW3	light model series	20	21 to 22	28	36

Points to note

- For low-pressure hose only, for hydraulic hose choose crimp fittings
- Hose sleeve or clamp not included

Tameson B.V.
Torenallee 20, 5617 BC Eindhoven, The Netherlands
CoC: 72902531
VAT: NL859280263B01

Contact Information
support@tameson.com
tameson.com

Document Information
Version: 1.0

Specifications subject to change without notice. Verify current specifications before ordering.