

Pin busbar, 16 mm<sup>2</sup> connection: 12x 1-phase touch-safe

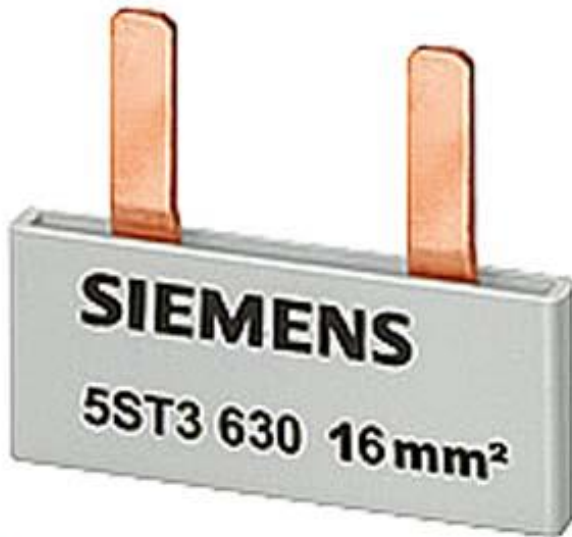


Figure similar

Model	
product brand name	SENTRON
product designation	Pin busbar
design of the product	16 mm <sup>2</sup> , 12x1PH
General technical data	
phase number	1
cross-section	16 mm <sup>2</sup>
Current	
continuous current / rated value	80 A
Product details	
product feature / insulated	Yes
Connections	
type of electrical connection	Pin
Mechanical Design	
width	3.8 mm

length	211.5 mm
net weight	47.31 g

### Certificates

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------

[Miscellaneous](#)

[Miscellaneous](#)



### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3632>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3632>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3632](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3632)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

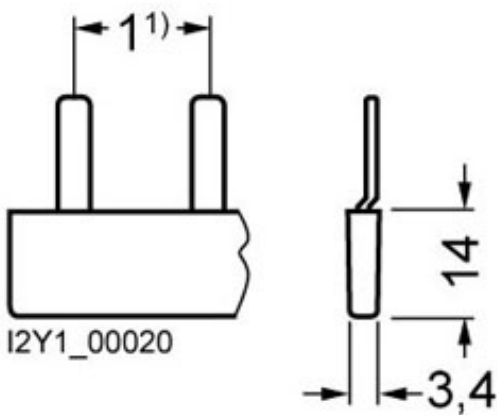

<sup>1)</sup> Pin spacings in MW (Modular widths, 1 MW = 18 mm).

