

Differential pressure sensor Air dual

Differential pressure transmitter with two independent measuring systems. With 8 selectable ranges each and Modbus functionality. For monitoring over-, under- or the differential pressure of air and other non-flammable and non-aggressive gases. Typical application in HVAC systems for monitoring air filters, fans V-belts as well as the use in pressure differential systems. IP65 / NEMA 4X rated enclosure.


Type Overview

Type	Measuring range pressure [Pa]	Communication	Output signal active pressure	Output signal active volumetric flow	Burst pressure
22ADP-154D	-100...2500	Modbus RTU	0...5 V, 0...10 V	0...5 V, 0...10 V	40 kPa

Technical data

Electrical data	Nominal voltage	AC/DC 24 V			
	Nominal voltage range	AC 19...29 V / DC 15...35 V			
	Power consumption AC	4.3 VA			
	Power consumption DC	2.3 W			
	Electrical connection	Pluggable spring loaded terminal block max. 2.5 mm ²			
	Cable entry	Cable gland with strain relief 2x ø6 mm			
Data bus communication	Communication	Modbus RTU			
	Number of nodes	Modbus see interface description			
Functional data	Sensor Technology	Piezo measuring element			
	Application	Air			
	Multirange	8 measuring ranges selectable			
	Voltage output	2 x 0...5 V, 0...10 V, min. resistance 10 kΩ			
	Output signal active note	Output 0...5/10 V selectable with switch			
	Response time	Adjustable 0.8 s or 4.0 s			
Measuring data	Measured values	Differential pressure Volumetric flow			
	Measuring fluid	Air and non-aggressive gases			
	Measuring range pressure settings	Setting	Range [Pa]	Range [inch WC]	Factory setting
		S0	0...2500	0...10	✓
		S1	0...2000	0...8	
		S2	0...1500	0...6	
		S3	0...1000	0...4	
		S4	0...500	0...2	
S5		0...250	0...1		
S6	0...100	0...0.4			
S7	-100...100	-0.4...0.4			
Measuring range volumetric flow	Adjustable via Modbus Default setting: 0...750'000 m ³ /h Selectable units: m ³ /h, m ³ /s, cfm				

Technical data

Measuring data	Accuracy pressure	Deviation compared to the reference device measuring range ≤500 Pa: ±5 Pa measuring range >500 Pa: ±10 Pa
	Long-term stability	±2.5% FSO (Full Scale Output) / 4 yr.
Materials	Cable gland	PA6, black
	Housing	Cover: PC, orange Bottom: PC, orange Seal: NBR70, black UV resistant
Safety data	Protection class IEC/EN	III, Safety Extra-Low Voltage (SELV)
	Power source UL	Class 2 Supply
	Degree of protection IEC/EN	IP65
	Degree of protection NEMA/UL	NEMA 4X
	Enclosure	UL Enclosure Type 4X
	EU Conformity	CE Marking
	Certification IEC/EN	IEC/EN 60730-1 and IEC/EN 60730-2-6
	Quality Standard	ISO 9001
	UL Approval	cULus acc. to UL60730-1A/-2-6, CAN/CSA E60730-1
	Type of action	Type 1
	Rated impulse voltage supply	0.8 kV
	Installation method	Independently mounted control
	Pollution degree	3
	Ambient humidity	Max. 95% RH, non-condensing
	Ambient temperature	-10...50°C [15...122°F]
	Fluid temperature	-10...50°C [15...122°F]

Safety notes


This device has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application. Unauthorised modifications are prohibited. The product must not be used in relation with any equipment that in case of a failure may threaten humans, animals or assets.

Ensure all power is disconnected before installing. Do not connect to live/operating equipment.

Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.


The device contains electrical and electronic components and must not be disposed of as household refuse. All locally valid regulations and requirements must be observed.

Remarks

- Manual zero-point calibration** In normal operation zero-point calibration should be executed every 12 months. Attention! For executing zero-point calibration, the power supply must be connected one hour before.
- Release both tube connectors from the pressure ports + and -
 - Press the button "Manual zero-point calibration" until the LED lights permanently
 - Wait until the LED flashes again and reinstall the tube connectors to the pressure ports (note + and -)

Indicators and Operation

Indicators Depending on the device and the number of measured values, the display automatically scales. Parameters, such as the fading in/out of measured values, brightness and traffic light function, are changed via the app or bus system. During the boot process, the software and hardware versions are displayed.

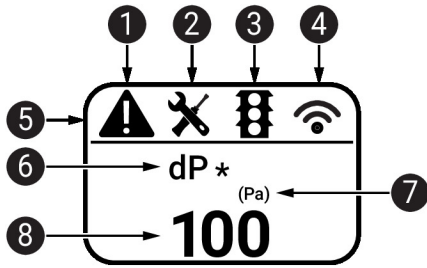

- ➊ Fault / sensor failure
- ➋ Service / visual inspection due
- ➌ TLF (traffic light function) active (thresholds for display colour changes)
- ➍ Radio active (not available)
- ➎ Status bar
- ➏ Measured value (* appears when TLF function is activated for this value)
- ➐ Unit of measure
- ➑ Measured value

Parts included

Description	Type
Mounting plate L housing	A-22D-A10
Duct connector kit, PVC tube 2 m, 2 connection elements (Plastic) for 22ADP-..	A-22AP-A08
Cable Gland with strain relief $\varnothing 6...8$ mm	
Dowels	
Screws	

Accessories

Optional accessories	Description	Type
	Pitot tube, Metal, L 40 mm, Tube connection 5 mm	A-22AP-A02
	Pitot tube, Metal, L 100 mm, Tube connection 5 mm	A-22AP-A04
	Connection adapter flex conduit, M20x1.5, for cable gland 1 x 6 mm, Multipack 10 pcs.	A-22G-A01.1
	Connection adapter flex conduit, M20, for cable gland 2x 6 mm, Multipack 10 pcs.	A-22G-A02.1
	Airflow volume probe 100 mm for round duct, min. 2 m/s	EXT-AC-R100
	Airflow volume probe 125 mm for round duct, min. 2 m/s	EXT-AC-R125
	Airflow volume probe 160 mm for round duct, min. 2 m/s	EXT-AC-R160
	Airflow volume probe 200 mm for round duct, min. 2 m/s	EXT-AC-R200
	Airflow volume probe 250 mm for round duct, min. 2 m/s	EXT-AC-R250
	Airflow volume probe 315 mm for round duct, min. 2 m/s	EXT-AC-R315
	Airflow volume probe 400 mm for round duct, min. 2 m/s	EXT-AC-R400
	Airflow volume probe 500 mm for round duct, min. 2 m/s	EXT-AC-R500
	Airflow volume probe 630 mm for round duct, min. 2 m/s	EXT-AC-R630
	Airflow volume probe 200 mm for rectangular duct, min. 2 m/s	EXT-AC-L200
	Airflow volume probe 250 mm for rectangular duct, min. 2 m/s	EXT-AC-L250
	Airflow volume probe 300 mm for rectangular duct, min. 2 m/s	EXT-AC-L300
	Airflow volume probe 400 mm for rectangular duct, min. 2 m/s	EXT-AC-L400
	Airflow volume probe 500 mm for rectangular duct, min. 2 m/s	EXT-AC-L500
	Airflow volume probe 600 mm for rectangular duct, min. 2 m/s	EXT-AC-L600
	Airflow volume probe 700 mm for rectangular duct, min. 2 m/s	EXT-AC-L700

Accessories

Tools	Description	Type
	Belimo Duct Sensor Assistant App	Belimo Duct Sensor Assistant App
	Bluetooth dongle for Belimo Duct Sensor Assistant App * Bluetooth dongle A-22G-A05	A-22G-A05
	Certified and available in North America, European Union, EFTA States and UK.	

Service

Tools connection This sensor can be operated and parametrised using the Belimo Duct Sensor Assistant App. When using the Belimo Duct Sensor Assistant App, the bluetooth dongle is required to enable communication between the app and the Belimo sensor.


For the standard operation and parametrisation of the sensor the bluetooth dongle and the Belimo Duct Sensor Assistant App are not needed. The sensor will arrive pre-configured with the factory default settings shown above.

Requirement:

- Bluetooth dongle (Belimo Part No: A-22G-A05)
- Bluetooth-capable smartphone
- Belimo Duct Sensor Assistant App (Google Play & Apple App Store)

Procedure:

- Plug the Bluetooth dongle into the sensor via the Micro-USB connector or by means of the interface PCB
- Connect Bluetooth-capable smartphone with Bluetooth dongle
- Select parametrisation in the Belimo Duct Sensor Assistant App

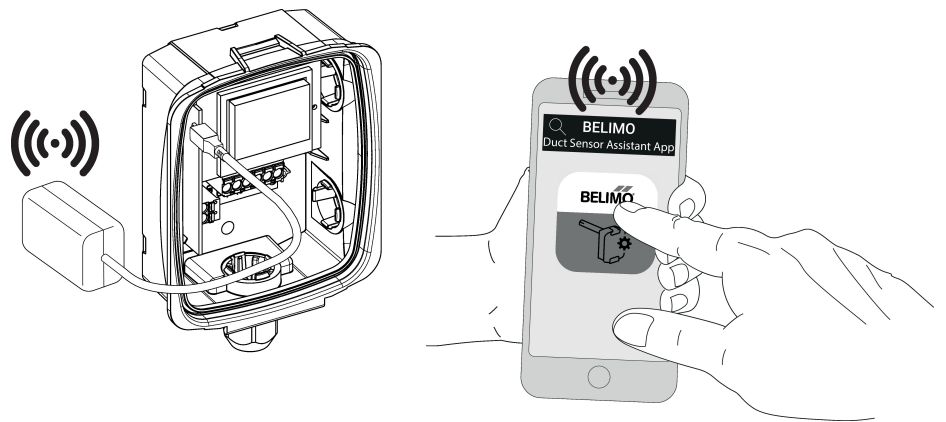
Wiring diagram


Notes Supply from isolating transformer.



The wiring of Modbus RTU (RS-485) is to be carried out in accordance with applicable regulations (www.modbus.org). The device has switchable resistors for bus termination.

Modbus-GND: Supply and communication are not galvanically isolated. Connect earth signal of the devices with one another.

Wiring diagram

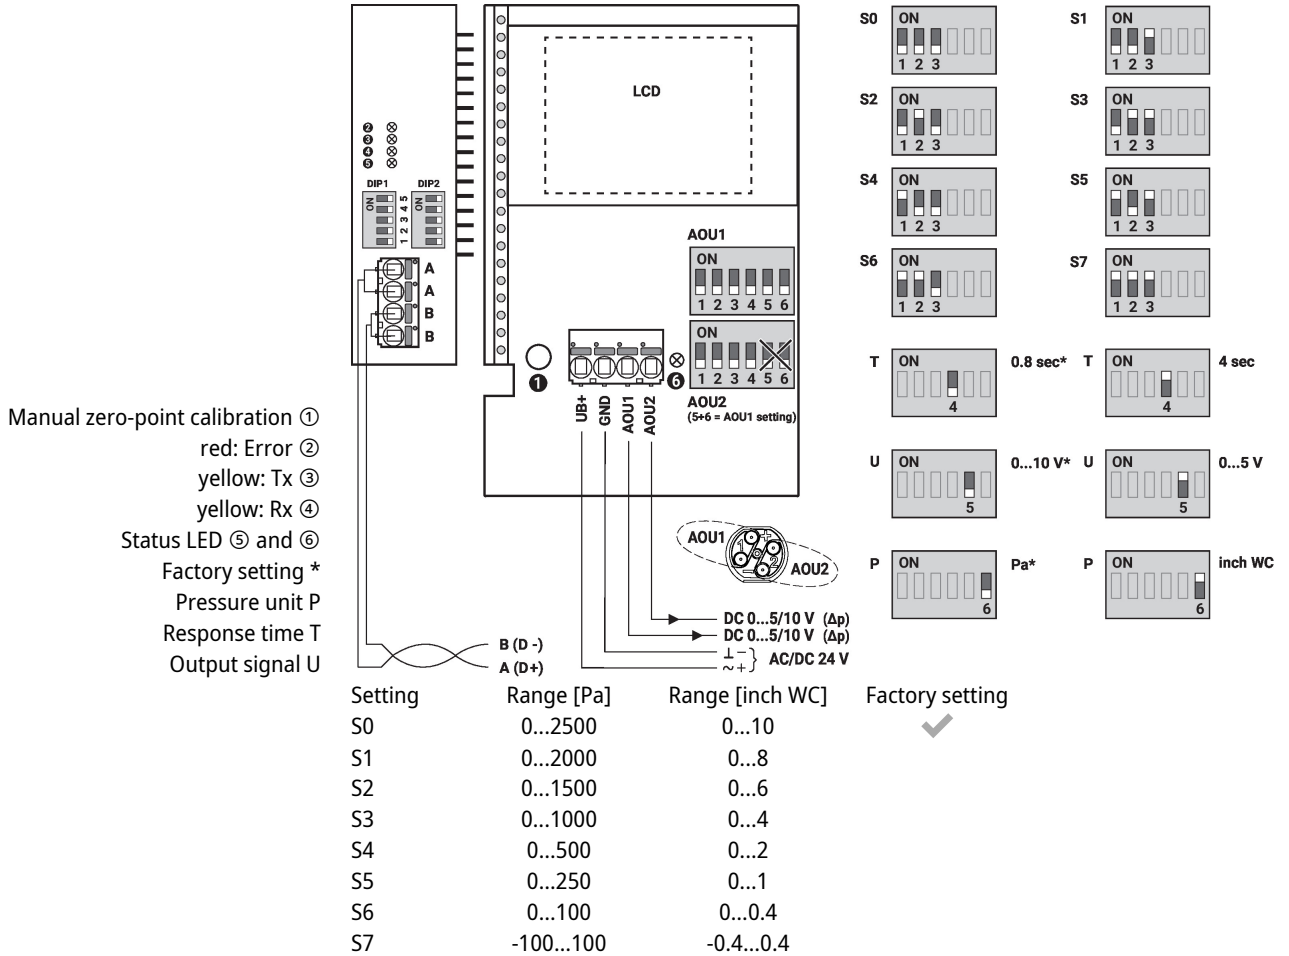

Detailed documentation


The separate document Sensor Modbus-Register informs about Modbus register, addressing, parity and bus termination (DIP1: address, DIP2: baud rate, parity, bus termination)

In addition to the information on the bus, the following analog outputs are available:



AOU1: differential pressure 1
 AOU2: differential pressure 2

If required, the outputs AOU1 and AOU2 can be changed to volumetric flow via bus system. The volumetric flow is calculated from the differential pressure, the k-factor and the height. Factory setting for the k-factor is 1.00 and for the height 330 metres above sea level. The values of the k-factor and the height can be changed via bus system.

Wiring RS-485 Modbus RTU

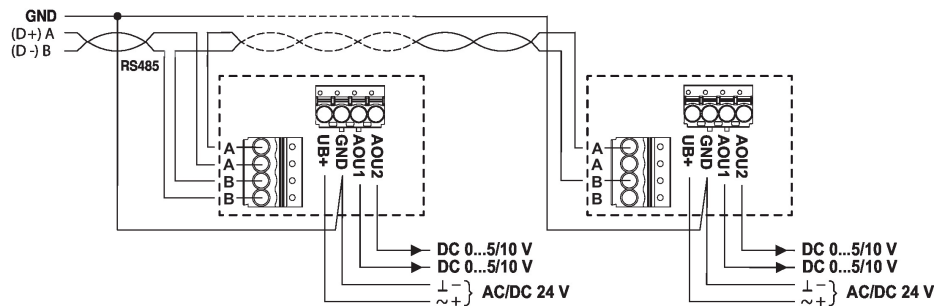

Dimensions

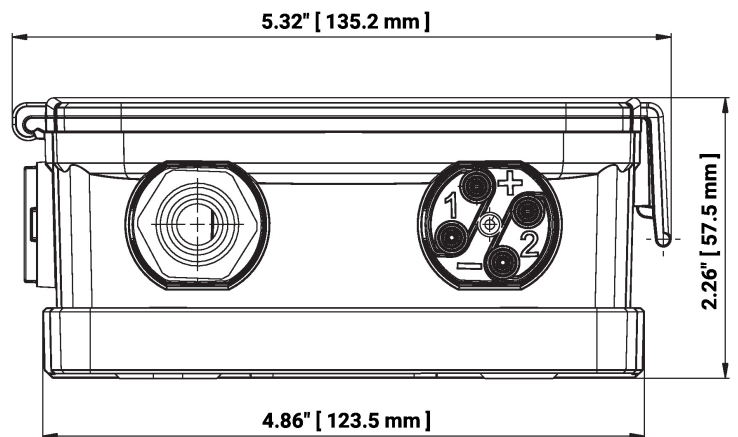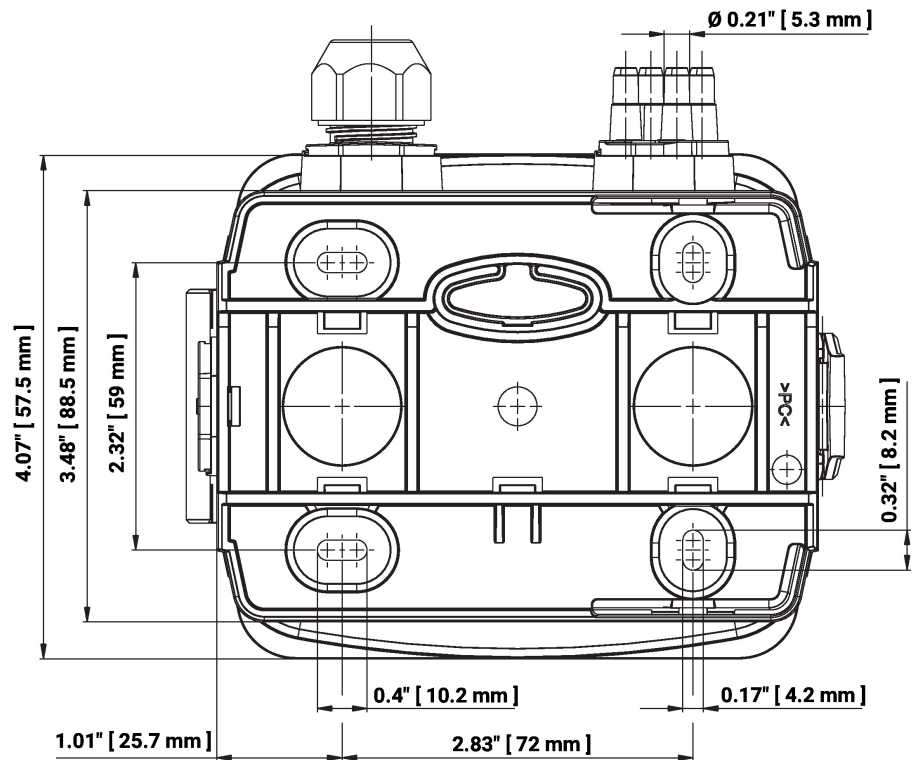

Type

22ADP-154D

Weight

0.45 kg

Further documentation

- Modbus Interface description
- Installation instructions