


# S-YT8J series

Sintered Bronze Pneumatic Mufflers With Screw Slot



M5 and M7

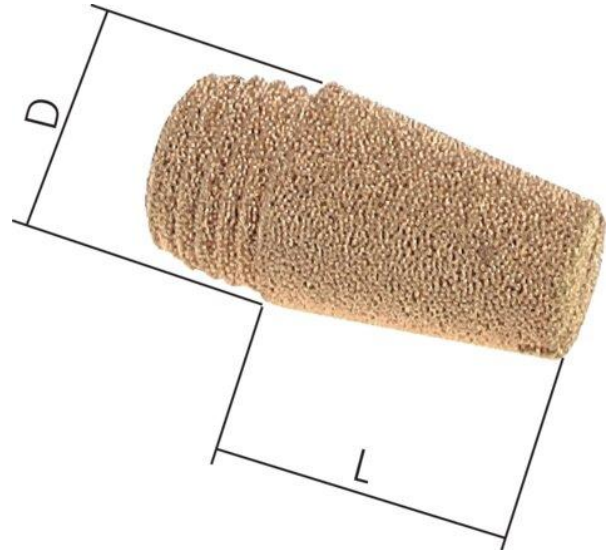


G1/8" to G1"

Reference	Connection	D	L
F2UBF	M5	8.5	15
P2B6H	M7	10	15
GL-18	G 1/8"	11	16
F2RT9	G 1/4"	14	19
F2RTA	G 3/8"	18	25
P2B6J	G 1/2"	24	32
P2B6K	G 3/4"	29.5	52
P2B6M	G 1"	35.5	60

# S-YT8J series

Sintered Bronze Pneumatic Mufflers With Screw Slot

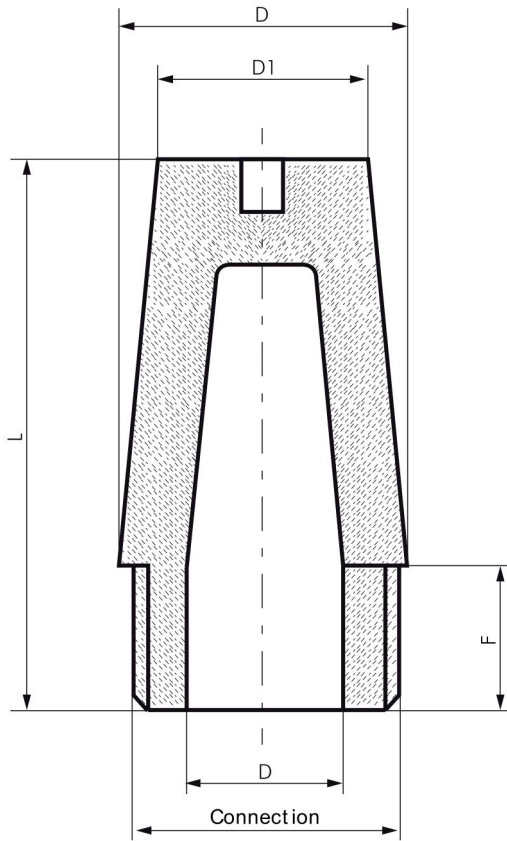

Reference	Connection	F	d	D	D1	L
GL-18	G 1/8"	5.5±0.5	4.0±0.3	11.0±0.3	8.0±0.3	21±0.6
F2RT9	G 1/4"	8.5±0.5	6.0±0.3	14.0±0.3	10.0±0.3	27±0.6
F2RTA	G 3/8"	11.0±0.5	10.0±0.3	18.0±0.3	15.0±0.3	36±0.6
P2B6J	G 1/2"	11.0±0.5	11.0±0.3	24.0±0.3	19.0±0.3	44±0.6
P2B6K	G 3/4"	12.0±0.5	17.5±0.3	29.5±0.5	20.0±0.3	65±0.8
P2B6M	G 1"	15.0±0.5	21.5±0.5	35.5±0.5	26.5±0.3	75±1.0