


## Insaver HO Topper LED II 175

*Insaver HO Topper LED II 175 RO 15W NW*  
3033937



### Product features

- IP44 from the front round LED downlight with outputs of up to 2,289lm and an efficacy of up to 99lm/W. Polycarbonate diffuser with a white bezel. Shallow recess depth (<65mm). Available in 12, 15, 21 & 25W in 150mm, 175mm, 205mm & 225mm cut out sizes. Perfect for up to 2x26W CFL replacement. Includes loop-in loop-out facility for quick installation.

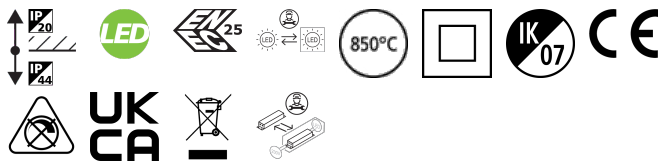

### PRODUCT OVERVIEW

Product name	Insaver HO Topper LED II 175 RO 15W NW
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Hospitality
ETIM Class	EC001744
E-number SE	7465673
Warranty	5 years
Fixture luminous flux (lm)	1480
Luminaire efficacy (lm/W)	99
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	8711971339373
Dimming method	N/A

### PHOTOMETRY


## Insaver HO Topper LED II 175

*Insaver HO Topper LED II 175 RO 15W NW*  
3033937

0.5	0.81 0.81	E(0°) E(C90) E(C180)	3313 730 711
1.0	1.62 1.63	E(0°) E(C90) E(C180)	628 146 184
1.5	2.43 2.44	E(0°) E(C90) E(C180)	368 87 86
2.0	3.24 3.25	E(0°) E(C90) E(C180)	207 49 48
2.5	4.05 4.06	E(0°) E(C90) E(C180)	133 31 31
3.0	4.86 4.88	E(0°) E(C90) E(C180)	82 22 22

Distance [m]      Cone diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 75.0°)  
— C90 - C270 (Half beam angle: 75.0°)



## TECHNICAL DRAWINGS

